

## Silicon NPN Epitaxial

## 2SC4702

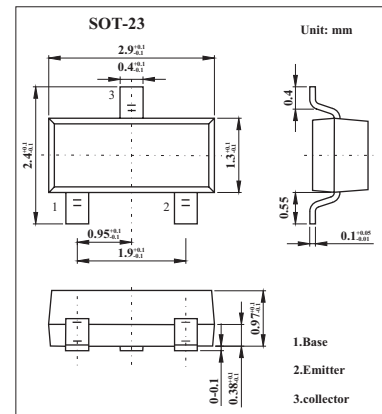
## ■ Features

- High breakdown voltage

$V_{CEO} = 300\text{ V}$

- Small Cob

$C_{ob} = 1.5\text{ pF Typ.}$

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Rating	Unit
Collector-base voltage	$V_{CB0}$	300	V
Collector-emitter voltage	$V_{CEO}$	300	V
Emitter-base voltage	$V_{EB0}$	5	V
Collector current	$I_c$	100	mA
Collector dissipation	$P_c$	150	mW
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_c = 10\mu\text{A}$ , $I_E = 0$	300			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_c = 1\text{mA}$ , $R_{BE} = \infty$	300			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}$ , $I_c = 0$	5			V
Collector cutoff current	$I_{CBO}$	$V_{CB} = 250\text{V}$ , $I_E = 0$			0.1	$\mu\text{A}$
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_c = 30\text{mA}$ , $I_B = 3\text{mA}$			0.5	V
DC current gain	$h_{FE}$	$V_{CE} = 6\text{V}$ , $I_c = 2\text{mA}$	60		150	
Gain bandwidth product	$f_T$	$V_{CE} = 6\text{V}$ , $I_c = 5\text{mA}$		80		MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = 10\text{V}$ , $I_E = 0$ , $f = 1\text{MHz}$		1.5		pF

## ■ Marking

Marking	
	XV-