

Silicon NPN Power Transistors

2SD1277 2SD1277A

DESCRIPTION


- With TO-220Fa package
- Complement to type 2SB951/951A
- High DC current gain
- High-speed switching

APPLICATIONS

- For medium speed power switching

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

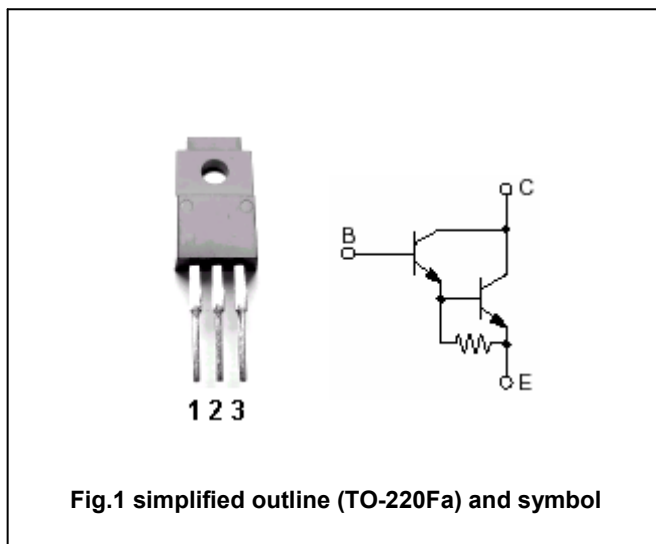

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	2SD1277	60	V
		2SD1277A	80	
V _{CEO}	Collector-emitter voltage	2SD1277	60	V
		2SD1277A	80	
V _{EBO}	Emitter-base voltage	Open collector	7	V
I _C	Collector current (DC)		8	A
I _{CM}	Collector current-Peak		12	A
P _C	Collector power dissipation	T _C =25°C	45	W
		T _a =25°C	2	
T _j	Junction temperature		150	°C
T _{stg}	Storage temperature		-55~150	°C

Silicon NPN Power Transistors

2SD1277 2SD1277A

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	2SD1277	I _C =30mA, I _B =0	60			V
		2SD1277A		80			
V _{CEsat}	Collector-emitter saturation voltage		I _C =4A; I _B =8mA			1.5	V
V _{BEsat}	Base-emitter saturation voltage		I _C =4A; I _B =8mA			2	V
I _{CBO}	Collector cut-off current	2SD1277	V _{CB} =60V; I _E =0			0.1	mA
		2SD1277A	V _{CB} =80V; I _E =0				
I _{EBO}	Emitter cut-off current		V _{EB} =7V; I _C =0			2	mA
h _{FE-1}	DC current gain		I _C =8A; V _{CE} =3V	500			
h _{FE-2}	DC current gain		I _C =4A; V _{CE} =3V	2000		10000	
f _T	Transition frequency		I _C =0.5A; V _{CE} =10V; f=1MHz	20			MHz

Switching times

t _{on}	Turn-on time	I _C =4A; I _{B1} =8mA I _{B2} =-8mA; V _{CC} =50V		0.5		μs
t _{stg}	Storage time			4.0		μs
t _f	Fall time			1.0		μs

◆ h_{FE-2} Classifications

Q	R
2000-5000	4000-10000

PACKAGE OUTLINE

