

TOSHIBA FIELD EFFECT TRANSISTOR SILICON N CHANNEL MOS TYPE (L<sup>2</sup>-π-MOSIII)

# 2SK1079

HIGH SPEED SWITCHING APPLICATIONS.

RELAY DRIVE, MOTOR DRIVE AND DC-DC CONVERTER APPLICATIONS.

INDUSTRIAL APPLICATIONS

Unit in mm

- 4-Volt Gate Drive
- Low Drain-Source ON Resistance :  $R_{DS(ON)} = 0.95\Omega$  (Typ.)
- High Forward Transfer Admittance :  $|Y_{fs}| = 0.65S$  (Typ.)
- Low Leakage Current :  $I_{GSS} = \pm 3\mu A$  (Max.) @  $V_{GS} = \pm 16V$   
 $I_{DSS} = 100\mu A$  (Max.) @  $V_{DS} = 100V$
- Enhancement-Mode :  $V_{th} = 0.8 \sim 2.0V$  @  $V_{DS} = 10V, I_D = 1mA$

MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Drain-Source Voltage		$V_{DSS}$	100	V
Drain-Gate Voltage ( $R_{GS} = 20k\Omega$ )		$V_{DGR}$	100	V
Gate-Source Voltage		$V_{GSS}$	$\pm 20$	V
Drain Current	DC	$I_D$	0.6	A
	Pulse	$I_{DP}$	1.8	
Drain Power Dissipation (Ta = 25°C)		$P_D$	0.5	W
Drain Power Dissipation		$P_D^*$	1.0	W
Channel Temperature		$T_{ch}$	150	°C
Storage Temperature Range		$T_{stg}$	-55~150	°C

$P_D^*$  : 2SK1079 mounted on cermic substrate (250mm<sup>2</sup>×0.8t)

THERMAL CHARACTERISTICS


CHARACTERISTIC	SYMBOL	MAX.	UNIT
Thermal Resistance, Channel to Ambient	$R_{th(ch-a)}$	250	°C/W

THIS TRANSISTOR IS AN ELECTROSTATIC SENSITIVE DEVICE.  
PLEASE HANDLE WITH CAUTION.

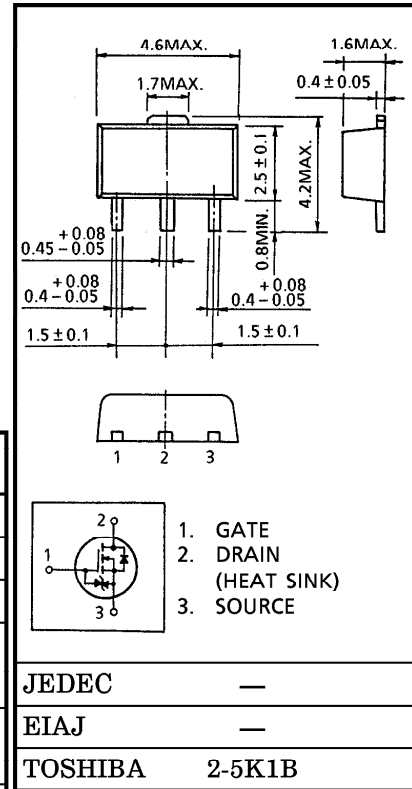

Weight : 0.05g

Marking



961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		IGSS	VGS = ±16V, VDS = 0V	—	—	±3	μA
Drain Cut-off Current		IDSS	VDS = 100V, VGS = 0V	—	—	100	μA
Drain-Source Breakdown Voltage		V(BR)DSS	ID = 10mA, VGS = 0V	100	—	—	V
Gate Threshold Voltage		Vth	VDS = 10V, ID = 1mA	0.8	—	2.0	V
ON State Drain Current		ID(ON)	VDS = 4V, VGS = 4V	0.6	—	—	A
Drain-Source ON Resistance		RDS(ON)	VGS = 4V, ID = 0.3A	—	1.2	1.8	Ω
			VGS = 10V, ID = 0.3A	—	0.95	1.3	
Forward Transfer Admittance		Yfs	VDS = 10V, ID = 0.3A	0.40	0.65	—	S
Input Capacitance		Ciss	VDS = 10V, VGS = 0V, f = 1MHz	—	85	130	pF
Reverse Transfer Capacitance		Crss		—	15	35	
Output Capacitance		Coss		—	40	65	
Switching Time	Rise Time	tr		—	4	15	ns
	Turn-on Time	ton		—	9	25	
	Fall Time	tf		—	30	70	
	Turn-off Time	t <sub>off</sub>		—	75	160	
Total Gate Charge (Gate-Source Plus Gate-Drain)		Qg	VDD ≈ 80V, VGS = 10V, ID = 0.6A	—	3.6	7.2	nC
Gate-Source Charge		Qgs		—	2.3	—	
Gate-Drain ("Miller") Charge		Qgd		—	1.3	—	

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Continuous Drain Reverse Current	IDR	—	—	—	0.6	A
Pulse Drain Reverse Current	IDRP	—	—	—	1.8	A
Diode Forward Voltage	VDSF	IDR = 0.6A, VGS = 0V	—	-0.8	-1.4	V
Reverse Recovery Time	t <sub>rr</sub>	IDR = 0.6A, VGS = 0V	—	120	—	ns
Reverse Recovered Charge	Q <sub>rr</sub>	dIDR / dt = 20A / μs	—	50	—	μC

961001EAA2'

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

