

**isc N-Channel MOSFET Transistor**

**2SK1517**

**DESCRIPTION**

- Drain Current  $-I_D=20A @ T_C=25^\circ C$
- Drain Source Voltage-  
:  $V_{DSS}=450$  (Min)

**APPLICATIONS**



- Designed for high voltage, high speed power switching applications such as switching regulators, converters, solenoid and relay drivers.

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{DSS}$	Drain-Source Voltage ( $V_{GS}=0$ )	450	V
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$I_D$	Drain Current-continuous@ $T_C=25^\circ C$	20	A
$P_{tot}$	Total Dissipation@ $T_C=25^\circ C$	120	W
$T_j$	Max. Operating Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ C$

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.0	$^\circ C/W$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	50	$^\circ C/W$

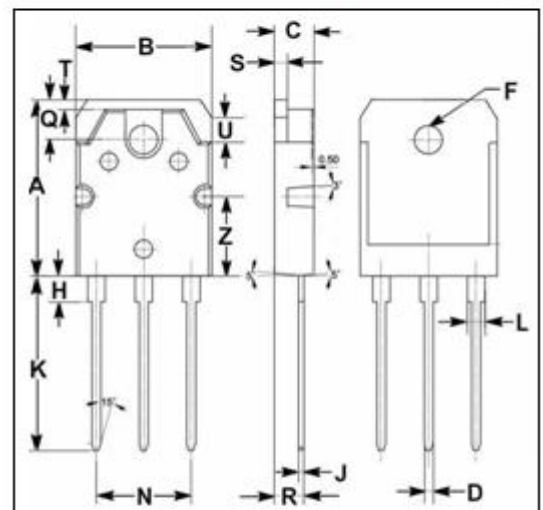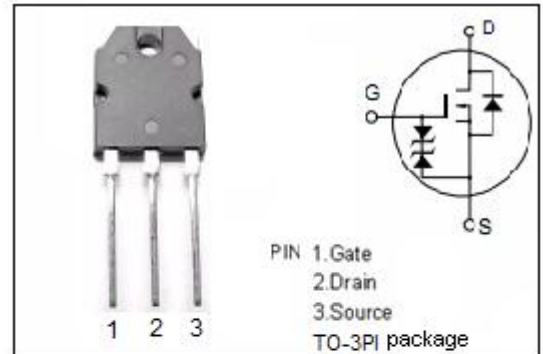

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.50	15.70
C	4.40	4.60
D	0.90	1.10
F	3.20	3.40
H	2.90	3.10
J	0.50	0.70
K	19.90	20.10
L	1.90	2.10
N	10.80	11.00
Q	4.40	4.60
R	3.30	3.35
S	1.40	1.60
T	1.00	1.20
U	2.10	2.30
Z	8.90	9.10

## isc N-Channel Mosfet Transistor

2SK1517

• ELECTRICAL CHARACTERISTICS (T<sub>C</sub>=25°C)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V <sub>(BR)DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0; I <sub>D</sub> = 10mA	450			V
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =10V; I <sub>D</sub> =1mA	2.0		3.0	V
R <sub>DS(on)</sub>	Drain-Source On-stage Resistance	V <sub>GS</sub> =10V; I <sub>D</sub> =10A		0.20	0.25	Ω
I <sub>GSS</sub>	Gate Source Leakage Current	V <sub>GS</sub> = ±25V; V <sub>DS</sub> = 0			±10	uA
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =400V; V <sub>GS</sub> = 0			250	uA
V <sub>SD</sub>	Diode Forward Voltage	I <sub>F</sub> =20A; V <sub>GS</sub> =0			1.0	V
t <sub>r</sub>	Rise time	V <sub>GS</sub> =10V; I <sub>D</sub> =10A; R <sub>L</sub> =3 Ω		130		ns
t <sub>on</sub>	Turn-on time			165		ns
t <sub>f</sub>	Fall time			105		ns
t <sub>off</sub>	Turn-off time			345		ns