

isc N-Channel MOSFET Transistor

2SK1941

DESCRIPTION

- Drain Current  $-I_D=16A @ T_C=25^\circ C$
- Drain Source Voltage-  
:  $V_{DSS}=600V(\text{Min})$
- Fast Switching Speed

APPLICATIONS



- Switching regulator
- UPS
- General purpose power amplifier

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{DSS}$	Drain-Source Voltage ( $V_{GS}=0$ )	600	V
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$I_D$	Drain Current-continuous@ $T_C=25^\circ C$	16	A
$P_{tot}$	Total Dissipation@ $T_C=25^\circ C$	100	W
$T_j$	Max. Operating Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ C$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.25	$^\circ C/W$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	30	$^\circ C/W$

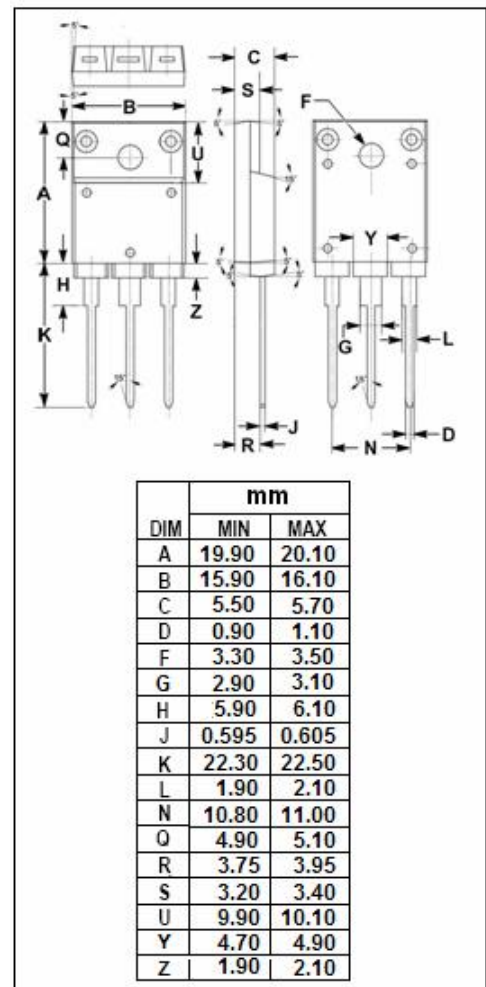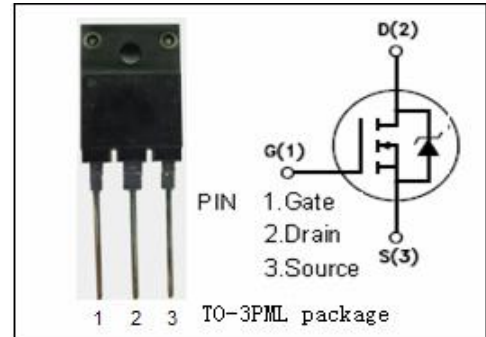

**isc N-Channel Mosfet Transistor****2SK1941**• ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$ )

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=1\text{mA}$	600			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=1\text{mA}$	2.5		3.5	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10\text{V}; I_D=8\text{A}$		0.37	0.55	$\Omega$
$I_{GSS}$	Gate-Body Leakage Current	$V_{GS}=\pm 30\text{V}; V_{DS}=0$			$\pm 100$	nA
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=600\text{V}; V_{GS}=0$			500	$\mu\text{A}$
$C_{iss}$	Input capacitance	$V_{DS}=25\text{V}; V_{GS}=0\text{V}; f_T=1\text{MHz}$		3300	4950	pF
$C_{rss}$	Reverse transfer capacitance			70	110	
$C_{oss}$	Output capacitance			310	470	
$t_r$	Rise time	$V_{GS}=10\text{V}; I_D=18\text{A};$ $V_{DD}=300\text{V};$ $R_L=10\Omega$		70	110	ns
$t_{on}$	Turn-on time			35	55	
$t_f$	Fall time			100	150	
$t_{off}$	Turn-off time			180	270	