

isc N-Channel MOSFET Transistor

2SK2842

• FEATURES

- With TO-220F packaging
- High speed switching
- Low gate input resistance
- Standard level gate drive
- Easy to use
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS



- Power supply
- Switching applications

• ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	500	V
V_{GSS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous	12	A
I_{DM}	Drain Current-Single Pulsed	48	A
P_D	Total Dissipation	45	W
T_j	Operating Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-65~150	$^{\circ}\text{C}$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	3.13	$^{\circ}\text{C/W}$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62.5	$^{\circ}\text{C/W}$

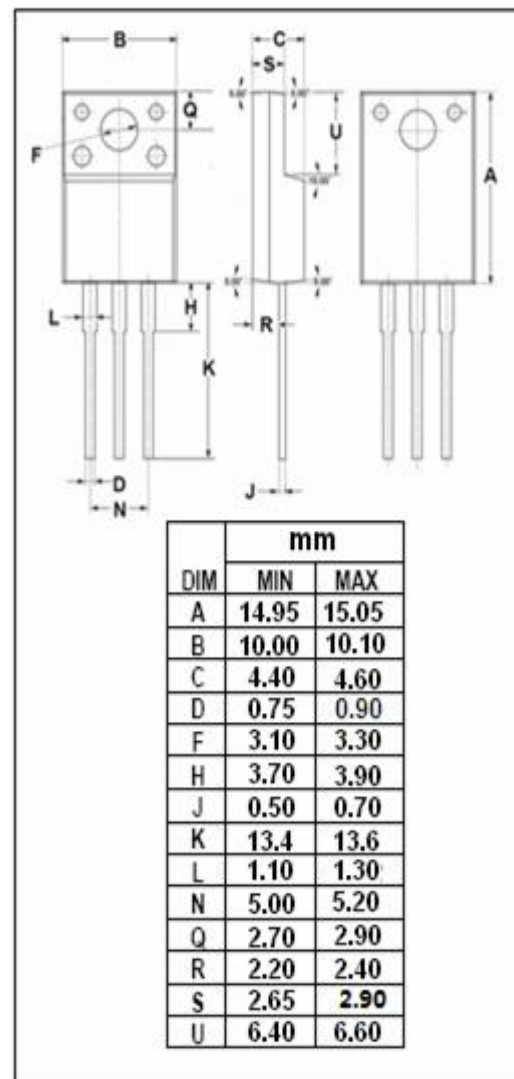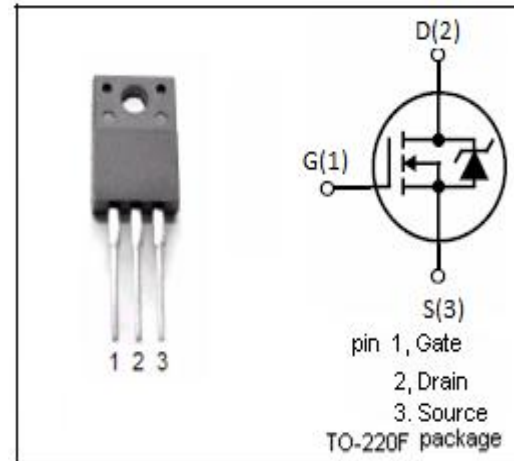

isc N-Channel MOSFET Transistor**2SK2842****ELECTRICAL CHARACTERISTICS** $T_c=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V; I_D=0.25mA$	500			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=1.0mA$	2.0		4.0	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10V; I_D=6A$		400	520	$m\Omega$
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 25V; V_{DS}=0V$			± 10	μA
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=500V; V_{GS}=0V;$			100	μA
V_{SDF}	Diode forward voltage	$I_{SD}=12A, V_{GS}=0V$			1.7	V