

# 2SK3693-01MR

## FUJI POWER MOSFET Super FAP-G Series

### N-CHANNEL SILICON POWER MOSFET

#### ■ Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

#### ■ Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

#### ■ Maximum ratings and characteristic Absolute maximum ratings

● (Tc=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V <sub>DS</sub>	450	V
	V <sub>D SX</sub> *5	450	V
Continuous drain current	I <sub>D</sub>	±17	A
Pulsed drain current	I <sub>D(puls)</sub>	±68	A
Gate-source voltage	V <sub>GS</sub>	±30	V
Repetitive or non-repetitive	I <sub>AR</sub> *2	17	A
Maximum Avalanche Energy	E <sub>AS</sub> *1	221.9	mJ
Maximum Drain-Source dV/dt	dV <sub>DS</sub> /dt *4	20	kV/μs
Peak Diode Recovery dV/dt	dV/dt *3	5	kV/μs
Max. power dissipation	P <sub>D</sub>	T <sub>a</sub> =25°C	2.16
		T <sub>c</sub> =25°C	80
Operating and storage temperature range	T <sub>ch</sub>	+150	°C
	T <sub>stg</sub>	-55 to +150	°C
Isolation Voltage	V <sub>iso</sub> *6	2000	V

\*1 L=1.41mH, V<sub>CC</sub>=45V, T<sub>ch</sub>=25°C See to Avalanche Energy Graph \*2 T<sub>ch</sub>≤150°C

\*3 I<sub>F</sub>≤-I<sub>D</sub>, -di/dt=50A/μs, V<sub>CC</sub>≤BV<sub>DSS</sub>, T<sub>ch</sub>≤150°C \*4 V<sub>DS</sub>≤450V \*5 V<sub>GS</sub>=-30V \*6 f=6-Hz, t=60sec.


#### ● Electrical characteristics (T<sub>c</sub> =25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V <sub>(BR)DSS</sub>	I <sub>D</sub> = 250μA V <sub>GS</sub> =0V	450			V
Gate threshold voltage	V <sub>GS(th)</sub>	I <sub>D</sub> = 250μA V <sub>DS</sub> =V <sub>GS</sub>	3.0		5.0	V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> =450V V <sub>GS</sub> =0V			25	μA
		V <sub>DS</sub> =360V V <sub>GS</sub> =0V			250	
Gate-source leakage current	I <sub>GSS</sub>	V <sub>GS</sub> =±30V V <sub>DS</sub> =0V			100	nA
Drain-source on-state resistance	R <sub>DS(on)</sub>	I <sub>D</sub> =8.5A V <sub>GS</sub> =10V		0.29	0.38	Ω
Forward transconductance	g <sub>fs</sub>	I <sub>D</sub> =8.5A V <sub>DS</sub> =25V	7	14		S
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> =25V		1275	1900	pF
Output capacitance	C <sub>oss</sub>	V <sub>GS</sub> =0V		200	300	
Reverse transfer capacitance	C <sub>rss</sub>	f=1MHz		9.5	14	
Turn-on time t <sub>on</sub>	td(on)	V <sub>CC</sub> =300V I <sub>D</sub> =8.5A		27	40	ns
	t <sub>r</sub>	V <sub>GS</sub> =10V		27	40	
Turn-off time t <sub>off</sub>	td(off)	R <sub>GS</sub> =10 Ω		48	72	
	t <sub>f</sub>			7	11	
Total Gate Charge	Q <sub>G</sub>	V <sub>CC</sub> =225V		33	50	nC
Gate-Source Charge	Q <sub>GS</sub>	I <sub>D</sub> =17A		13.5	20.3	
Gate-Drain Charge	Q <sub>GD</sub>	V <sub>GS</sub> =10V		10.5	16	
Avalanche capability	I <sub>AV</sub>	L=1.41mH T <sub>ch</sub> =25°C	17			A
Diode forward on-voltage	V <sub>SD</sub>	I <sub>F</sub> =17A V <sub>GS</sub> =0V T <sub>ch</sub> =25°C		1.20	1.80	V
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =17A V <sub>GS</sub> =0V		0.57		μs
Reverse recovery charge	Q <sub>rr</sub>	-di/dt=100A/μs T <sub>ch</sub> =25°C		6.5		μC


#### ● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R <sub>th(ch-c)</sub>	channel to case			1.563	°C/W
	R <sub>th(ch-a)</sub>	channel to ambient			58.0	°C/W

#### ■ Outline Drawings [mm]

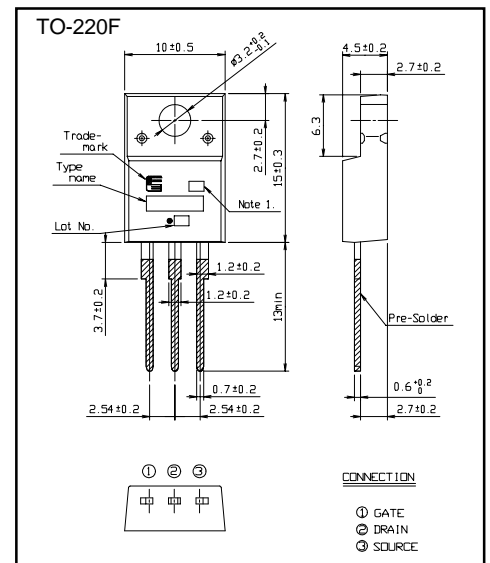

#### ■ Equivalent circuit schematic

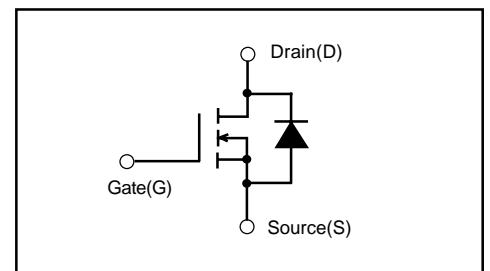

Characteristics

