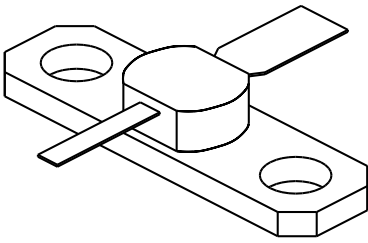


3005
5 Watts - 28 Volts, Class C
Microwave 3000 MHz

<p>GENERAL DESCRIPTION The 3005 is a COMMON BASE transistor capable of providing 5 Watts Class C, RF output power at 3000 MHz. Gold metalization and diffused ballasting are used to provide high reliability and supreme ruggedness. The transistor uses a fully hermetic High Temperature Solder Sealed package.</p>	<p>CASE OUTLINE 55BT, STYLE 1</p> 																
<p>ABSOLUTE MAXIMUM RATINGS</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 60%;">Maximum Power Dissipation @ 25°C</td> <td style="text-align: right;">25 Watts</td> </tr> <tr> <td colspan="2">Maximum Voltage and Current</td> </tr> <tr> <td>BVces Collector to Emitter Voltage</td> <td style="text-align: right;">50 Volts</td> </tr> <tr> <td>BVebo Emitter to Base Voltage</td> <td style="text-align: right;">3.5 Volts</td> </tr> <tr> <td>Ic Collector Current</td> <td style="text-align: right;">2.5 A</td> </tr> <tr> <td colspan="2">Maximum Temperatures</td> </tr> <tr> <td>Storage Temperature</td> <td style="text-align: right;">- 65 to + 200°C</td> </tr> <tr> <td>Operating Junction Temperature</td> <td style="text-align: right;">+ 200°C</td> </tr> </table>	Maximum Power Dissipation @ 25°C	25 Watts	Maximum Voltage and Current		BVces Collector to Emitter Voltage	50 Volts	BVebo Emitter to Base Voltage	3.5 Volts	Ic Collector Current	2.5 A	Maximum Temperatures		Storage Temperature	- 65 to + 200°C	Operating Junction Temperature	+ 200°C	
Maximum Power Dissipation @ 25°C	25 Watts																
Maximum Voltage and Current																	
BVces Collector to Emitter Voltage	50 Volts																
BVebo Emitter to Base Voltage	3.5 Volts																
Ic Collector Current	2.5 A																
Maximum Temperatures																	
Storage Temperature	- 65 to + 200°C																
Operating Junction Temperature	+ 200°C																

ELECTRICAL CHARACTERISTICS @ 25 °C


SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 3000 MHz	5.0			Watt
Pin	Power Input	Vcb = 28 Volts			1.5	Watt
Pg	Power Gain	Po = 5 Watts	5.2			dB
η_c	Collector Efficiency	As Above		30		%
VSWR₁	Load Mismatch Tolerance	F = 3 GHz, Po = 5 W			20:1	

BVces	Collector to Emitter Breakdown	Ic = 10 mA	50			Volts
BVebo	Emitter to Base Breakdown	Ie = 10 mA	3.5			Volts
h_{FE}	Current Gain	Vce = 5 V, Ic = 300 mA	20		120	
Cob	Output Capacitance	F = 1 MHz, Vcb = 28 V				pF
θ_{jc}	Thermal Resistance				7.0	°C/W


Issue August 1996

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.


SATURATED P OUT VS FREQUENCY

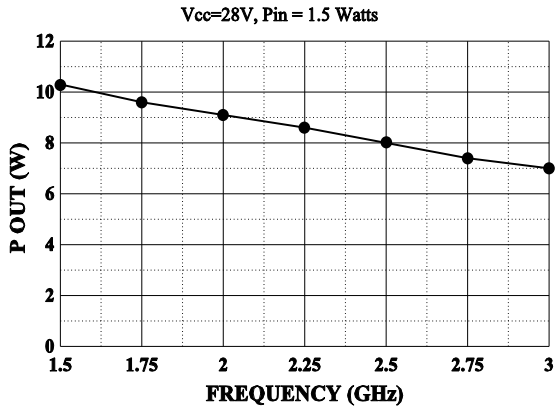


TYPICAL POWER OUTPUT VS FREQUENCY

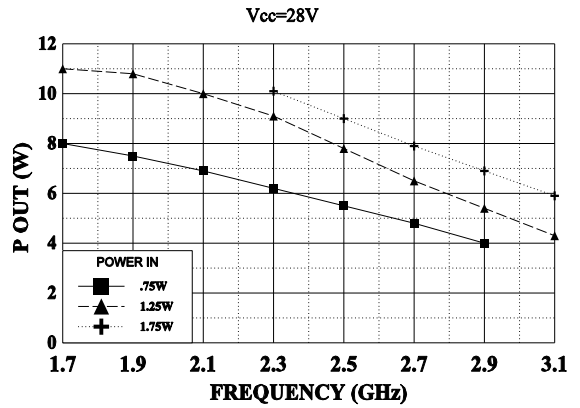


EFFICIENCY VS FREQUENCY

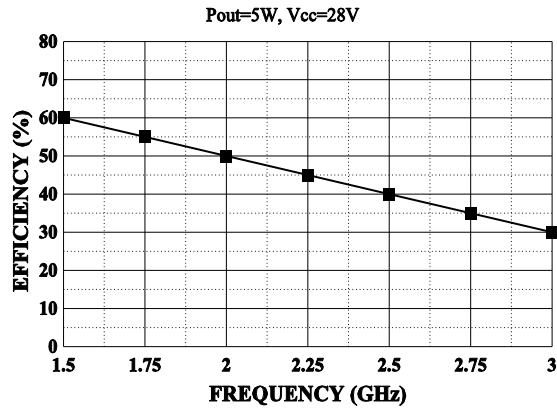

SERIES INPUT IMPEDANCE VS FREQUENCY

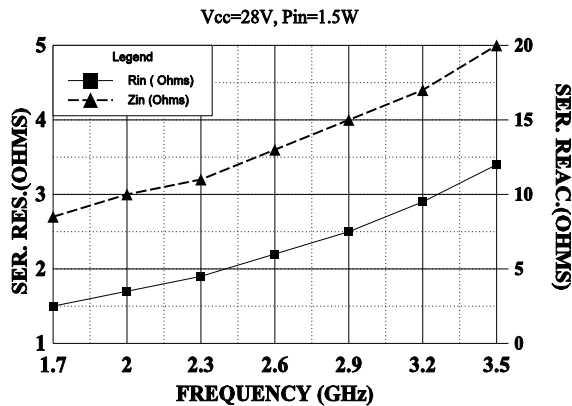


SERIES LOAD IMPEDANCE VS FREQUENCY

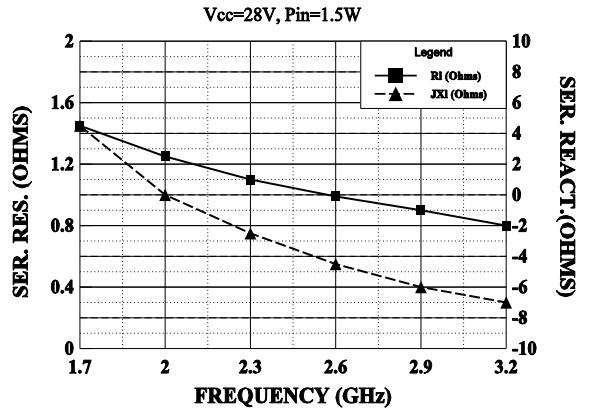

REVISIONS


ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------

DIM	INCHES
A	.230
B	.135
C	.900
D	.050
E	.090
F	.160
G	.320
H	.140
I	.050
J	.160

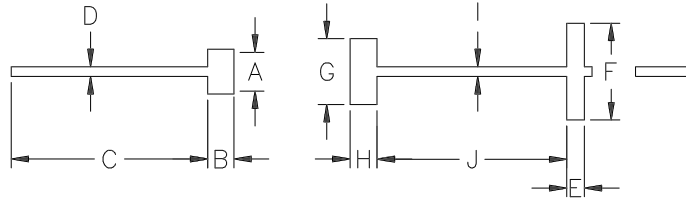

3005 TEST AMPLIFIER

f = 3000 MHz

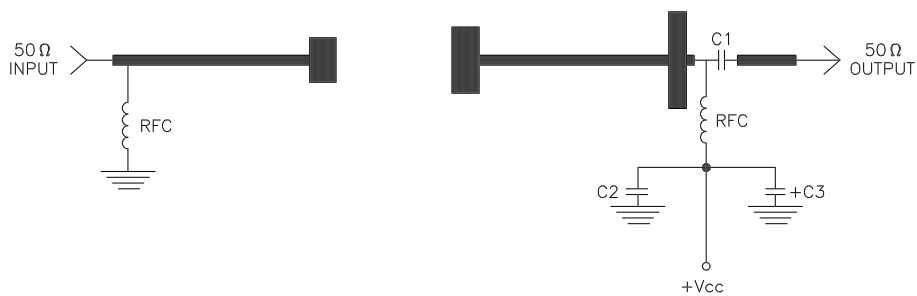

— = Microstrip on 0.020" Teflon Fiberglass, Er=2.55
 C1,C2 = ATC 'A' 47pf
 C3 = 10 Mfd @ 35 Volts