

isc Silicon NPN Power Transistor

3DD159C

DESCRIPTION

- With TO-3 packaging
- Large collector current
- Low collector saturation voltage
- High power dissipation
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Designed for use in DC-DC converter
- Driver of solenoid or motor

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	200	V
V _{CEO}	Collector-Emitter Voltage	150	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current-Continuous	5	A
P _D	Total Power Dissipation@T _C =75°C	50	W
T _J	Max.Junction Temperature	175	°C
T _{stg}	Storage Temperature	-55~175	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance,Junction to Case	2.0	°C/W

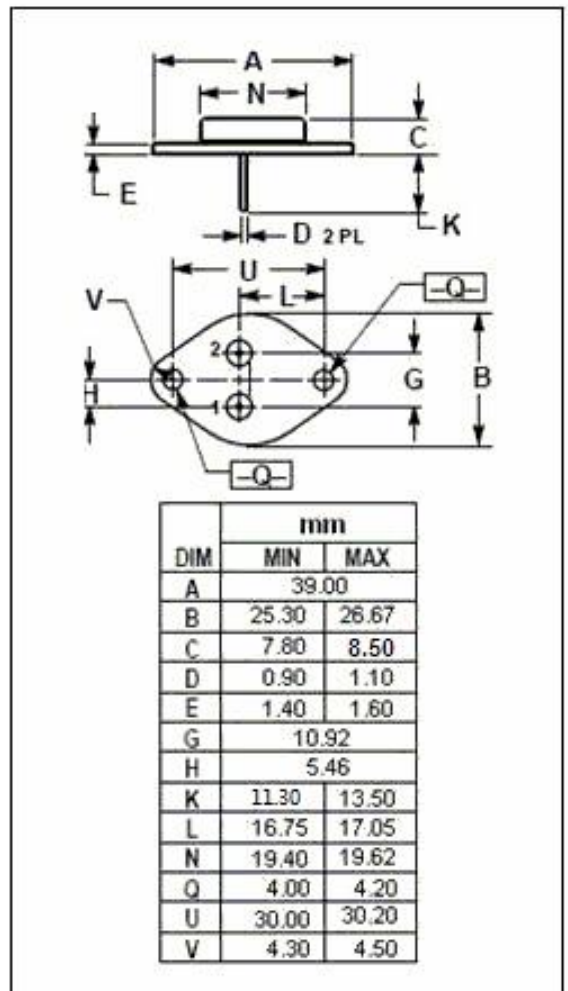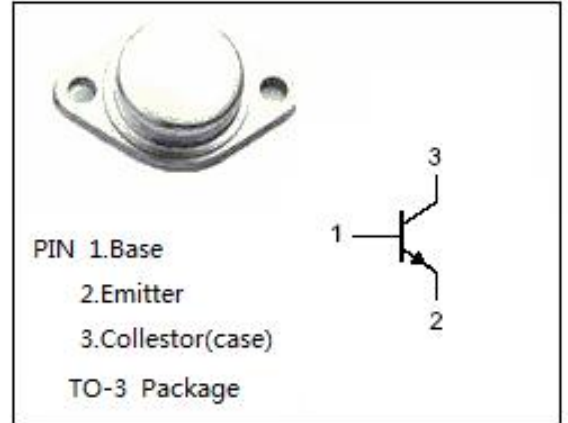

isc Silicon NPN Power Transistor**3DD159C****ELECTRICAL CHARACTERISTICS** $T_c=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
BV_{CBO}	Collector-Base Sustaining Voltage	$I_C=3\text{mA}; I_E=0$	200		V
BV_{CEO}	Collector-Emitter Sustaining Voltage	$I_C=3\text{mA}; I_B=0$	150		V
BV_{EBO}	Emitter-Base Sustaining Voltage	$I_E=1\text{mA}; I_C=0$	5		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2.5\text{A}; I_B=0.25\text{A}$		1.2	V
$V_{BE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2.5\text{A}; I_B=0.25\text{A}$		1.5	V
I_{CEO}	Collector Cutoff Current	$V_{CE}=100\text{V}; I_E=0$		1	mA
h_{FE}	DC Current Gain	$I_C=2.5\text{A}; V_{CE}=5\text{V}$	15	120	