

3 Amps, 600/650 Volts N-CHANNEL POWER MOSFET


DESCRIPTION

3N60 3N65 is a high voltage and high current power MOSFET, designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient DC to DC converters and bridge circuits.

FEATURES

- * $R_{DS(ON)} = 3.6\Omega @ V_{GS} = 10V$
- * Ultra low gate charge (typical 10 nC)
- * Low reverse transfer capacitance ($C_{RSS} =$ typical 5.5 pF)
- * Fast switching capability
- * Avalanche energy specified
- * Improved dv/dt capability, high ruggedness

SYMBOL




ORDERING INFORMATION


Ordering Number	Package	Pin Assignment		
		1	2	3
3N60	TO-220	G	D	S
	ITO-220/TO-220F	G	D	S
3N65	TO-251/IPAK	G	D	S
	TO-252/DPAK	G	D	S

Note: Pin Assignment: G: Gate D: Drain S: Source


Part No.	Package	Packing
3N60-TU	TO-251	75pcs / Tube
3N60-TR	TO-252	2.5Kpcs / 13" Reel
3N60-TU	TO-252	75pcs / Tube
3N60-TU	TO-220	50pcs / Tube
3N60-TU	ITO-220/TO-220F	50pcs / Tube
3N60-TU	TO-262	50pcs / Tube
3N60-TU	TO-263	50pcs / Tube
3N60-TR	TO-263	800pcs / 13" Reel




TO-220



ITO-220/TO-220F



TO-251/IPAK



TO-252/DPAK

■ ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage	3N60	V_{DSS}	600	V
	3N65		650	V
Gate-Source Voltage		V_{GSS}	± 30	V
Avalanche Current (Note 2)		I_{AR}	3.0	A
Drain Current	Continuous	I_D	3.0	A
	Pulsed (Note 2)	I_{DM}	12	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	200	mJ
	Repetitive (Note 2)	E_{AR}	7.5	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	4.5	V/ns
Power Dissipation	TO-220	P_D ($T_C = 25^\circ\text{C}$)	75	W
	TO-220F		34	W
	TO-251/IPAK		50	W
	TO-252/DPAK		50	W
Junction Temperature		T_J	+150	$^\circ\text{C}$
Ambient Operating Temperature		T_{OPR}	-55 ~ +150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by T_J

3. $L=64\text{mH}$, $I_{AS}=3.0\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\ \Omega$, Starting $T_J = 25^\circ\text{C}$

4. $I_{SD} \leq 3.0\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction-to-Ambient	TO-251/IPAK	θ_{JA}	110	$^\circ\text{C}/\text{W}$
	TO-252/DPAK		110	
	TO-220		62.5	
	TO-220F		62.5	
Junction-to-Case	TO-251/IPAK	θ_{JC}	2.50	$^\circ\text{C}/\text{W}$
	TO-252/DPAK		2.50	
	TO-220		1.67	
	TO-220F		3.68	

■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	3N60	$V_{GS} = 0V, I_D = 250\mu A$	600			V
	3N65		650			V
Drain-Source Leakage Current	I_{DSS}	$V_{DS} = 600V, V_{GS} = 0V$			10	μA
Gate-Source Leakage Current	Forward	$V_{GS} = 30V, V_{DS} = 0V$ $V_{GS} = -30V, V_{DS} = 0V$			100	nA
	Reverse				-100	nA
Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D = 250\mu A$, Referenced to 25°C		0.6		$^\circ\text{C}^{-1}$
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 1.5A$		2.8	3.6	Ω
DYNAMIC CHARACTERISTICS						
Input Capacitance	C_{ISS}	$V_{DS} = 25V, V_{GS} = 0V, f = 1\text{MHz}$		350	450	pF
Output Capacitance	C_{OSS}			50	65	pF
Reverse Transfer Capacitance	C_{RSS}			5.5	7.5	pF
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	$t_{D(ON)}$	$V_{DD} = 30V, I_D = 3.0A,$ $R_G = 25\Omega$ (Note 1, 2)		35	50	ns
Turn-On Rise Time	t_R			60	70	ns
Turn-Off Delay Time	$t_{D(OFF)}$			100	150	ns
Turn-Off Fall Time	t_F			65	75	ns
Total Gate Charge	Q_G	$V_{DS} = 50V, V_{GS} = 10V,$ $I_D = 3.0A$ (Note 1, 2)		18.5	23	nC
Gate-Source Charge	Q_{GS}			5.2		nC
Gate-Drain Charge	Q_{GD}			4.9		nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS} = 0V, I_{SD} = 3.0A$			1.4	V
Continuous Drain-Source Current	I_{SD}				3.0	A
Pulsed Drain-Source Current	I_{SM}				12	A
Reverse Recovery Time	t_{RR}	$V_{GS} = 0V, I_{SD} = 3.0A,$		210		ns
Reverse Recovery Charge	Q_{RR}	$di/dt = 100 A/\mu s$ (Note1)		1.2		μC

Notes: 1. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$
2. Essentially independent of operating temperature

■ TEST CIRCUITS AND WAVEFORMS

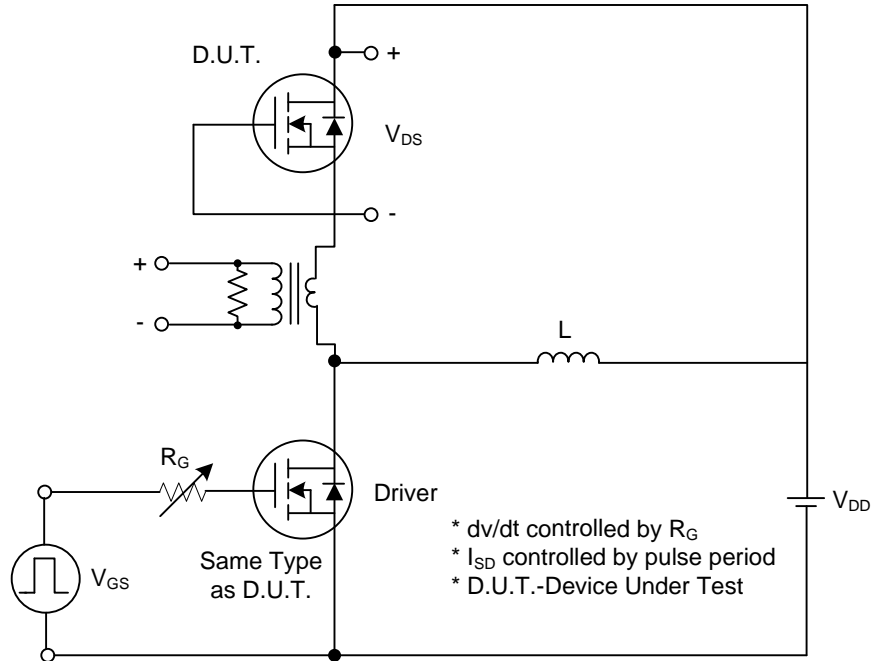


Fig. 1A Peak Diode Recovery dv/dt Test Circuit

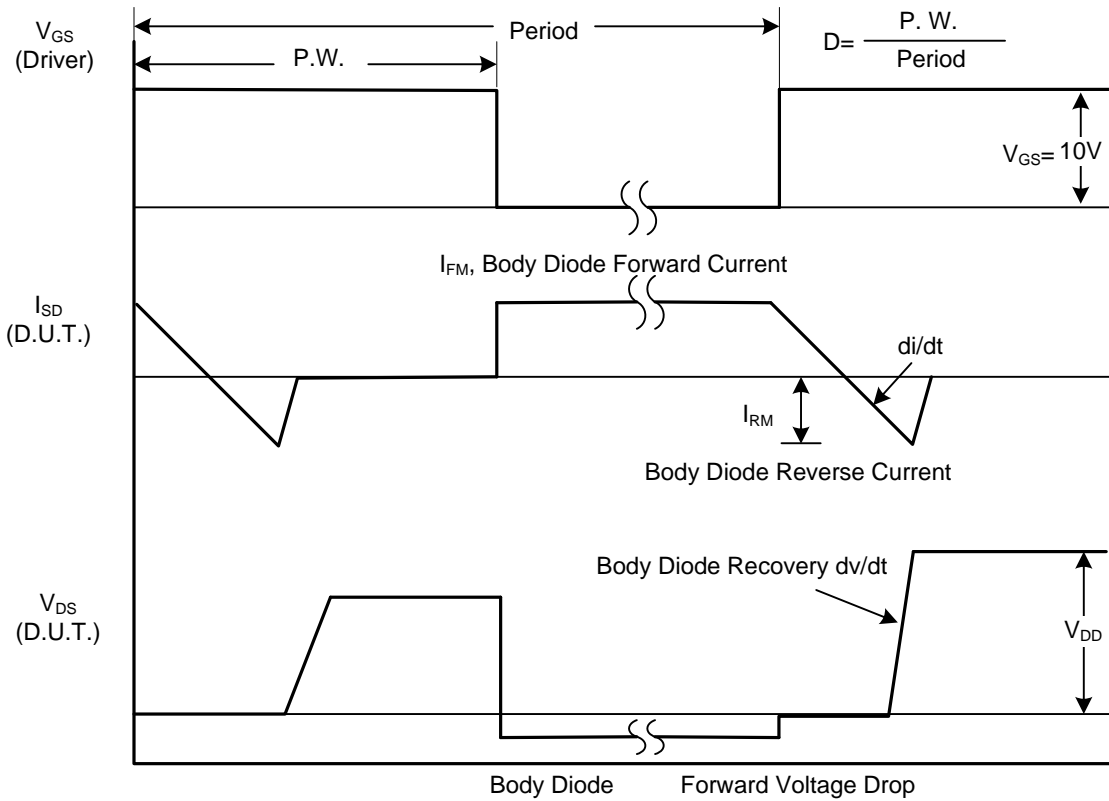


Fig. 1B Peak Diode Recovery dv/dt Waveforms

■ TEST CIRCUITS AND WAVEFORMS (Cont.)

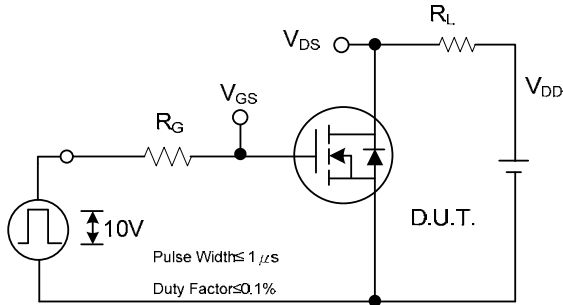


Fig. 2A Switching Test Circuit

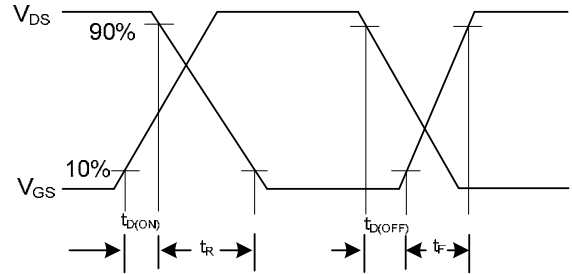


Fig. 2B Switching Waveforms

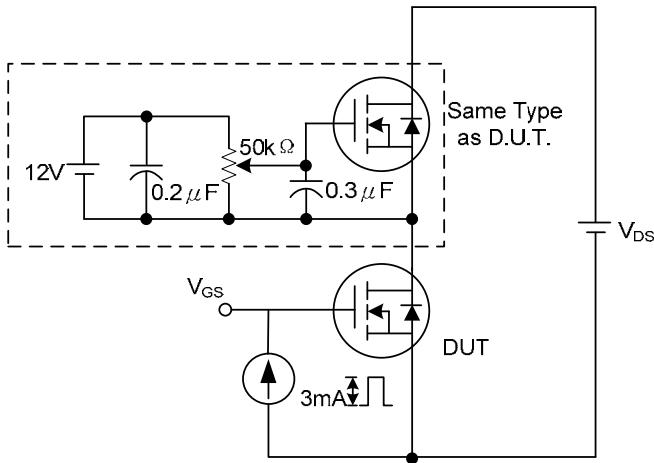


Fig. 3A Gate Charge Test Circuit

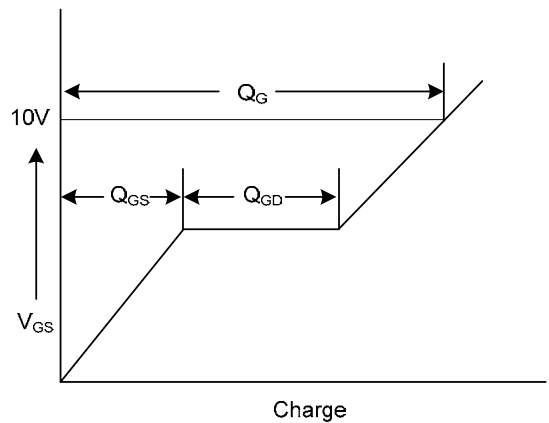


Fig. 3B Gate Charge Waveform

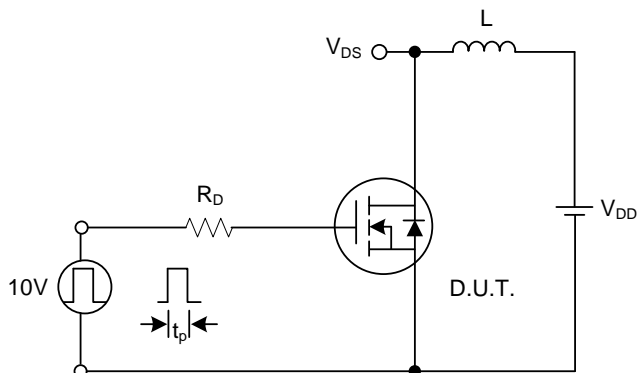


Fig. 4A Unclamped Inductive Switching Test Circuit


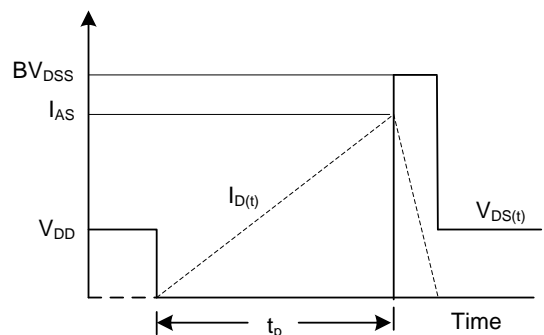



Fig. 4B Unclamped Inductive Switching Waveforms

TYPICAL CHARACTERISTICS


On-State Characteristics

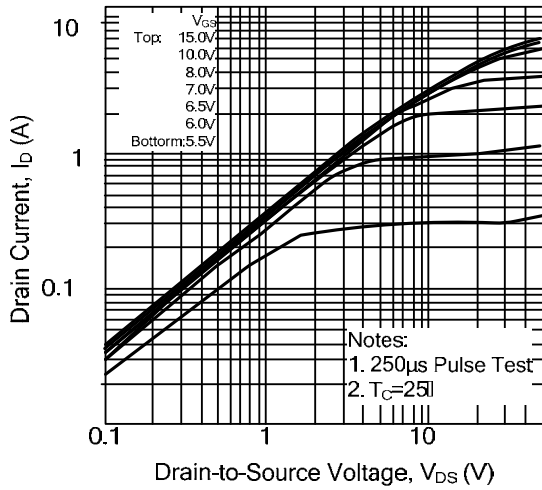


Transfer Characteristics

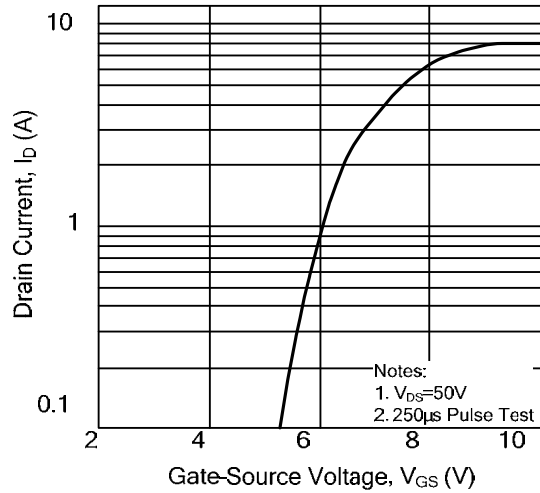


On-Resistance Variation vs. Drain Current and Gate Voltage

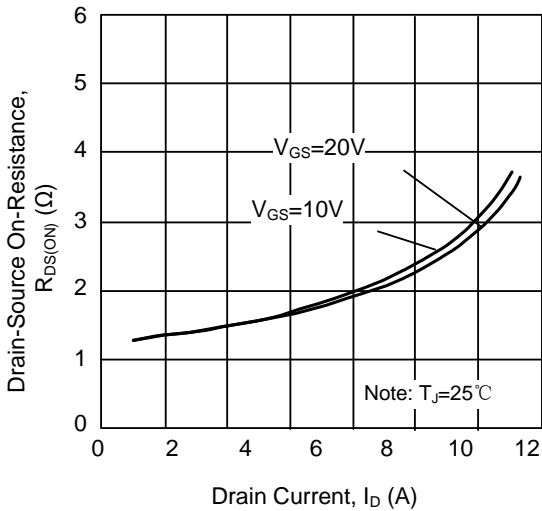


On State Current vs. Allowable Case Temperature

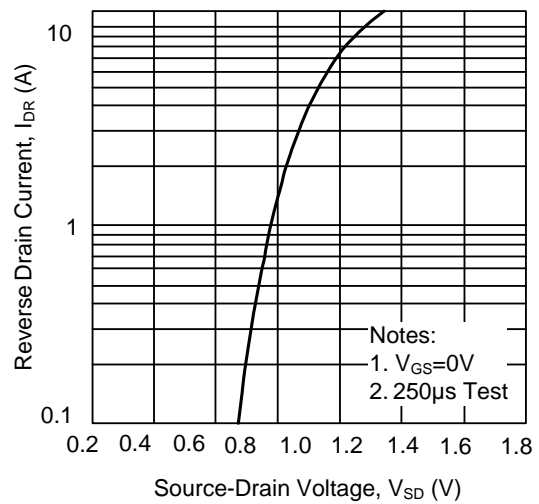

Capacitance Characteristics (Non-Repetitive)

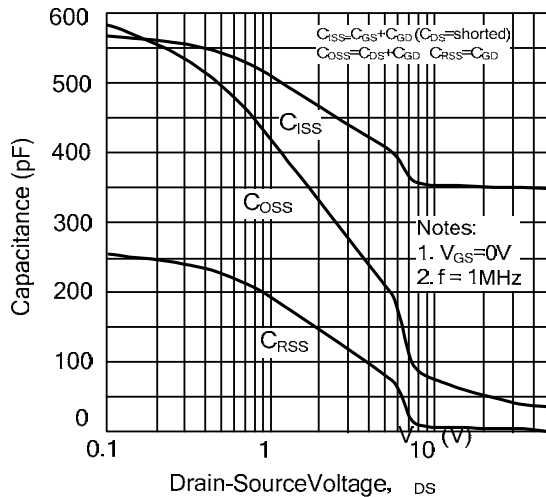

Gate Charge Characteristics

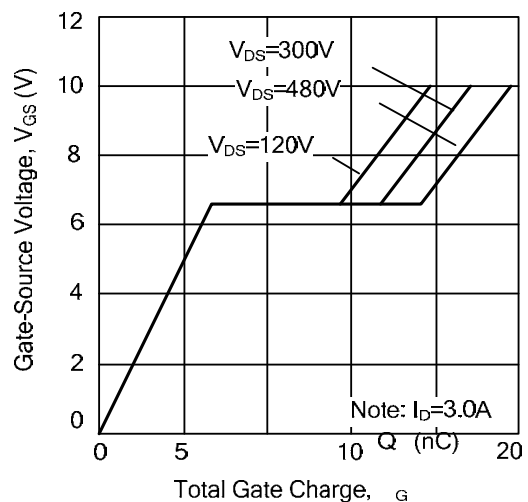

TYPICAL CHARACTERISTICS(Cont.)

