




## Submicro Axial Lead Lamp

| Line No. | Part No. | Volts | Amps  | M.S.C.P. | Life Hours | Filament Type | Dimensions |     | Drawing |
|----------|----------|-------|-------|----------|------------|---------------|------------|-----|---------|
|          |          |       |       |          |            |               | MOL        | D   |         |
| 1        | 7151     | 1.48  | 0.058 | 0.027    | 200        | C-8           | 4.8        | 1.0 | A       |



## Micro Axial Lead Lamps

| Line No. | Part No. | Volts | Amps  | M.S.C.P. | Life Hours | Filament Type | Dimensions |     | Drawing |
|----------|----------|-------|-------|----------|------------|---------------|------------|-----|---------|
|          |          |       |       |          |            |               | MOL        | D   |         |
| 2        | 7155     | 5.0   | 0.115 | 0.15     | 30,000     | C-8           | 10         | 2.4 | B       |
| 3        | 7154     | 5.0   | 0.115 | 0.15     | 40,000     | C-8           | 13         | 3.2 | B       |
| 4        | 7156     | 12.0  | 0.060 | 0.15     | 8,000      | C-8           | 11         | 2.4 | B       |
| 5        | 7157     | 12.0  | 0.060 | 0.15     | 12,000     | C-8           | 13         | 3.2 | B       |

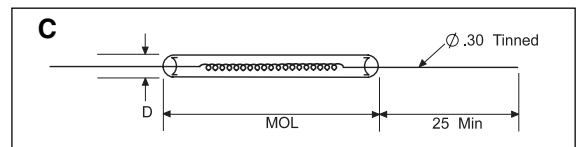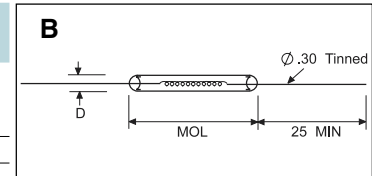

## Axial Lead Lamps

| Line No. | Part No. | Volts | Amps  | M.S.C.P. | Filament Type | Life Hours | Dimensions |     | Drawing |
|----------|----------|-------|-------|----------|---------------|------------|------------|-----|---------|
|          |          |       |       |          |               |            | MOL        | D   |         |
| 6        | 7163     | 5.0   | 0.115 | 0.15     | C-8           | 40,000     | 17.5       | 3.2 | C       |
| 7        | 7159     | 6.3   | 0.250 | 0.60     | C-8           | 7,500      | 24.5       | 5.0 | C       |
| 8        | 7160     | 6.3   | 0.100 | 0.16     | C-8           | 5,000      | 24.5       | 5.0 | C       |
| 9        | 7161     | 12.0  | 0.100 | 0.40     | C-8           | 5,000      | 20.0       | 4.2 | C       |
| 10       | 7162     | 12.0  | 0.250 | 1.00     | C-8           | 5,000      | 24.5       | 4.2 | C       |