



■ ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	60	V
Collector-Emitter Voltage	$V_{CEO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Power Dissipation ( $T_C=25^\circ\text{C}$ )	$P_C$	750	mW
Collector Current	$I_C$	150	mA
Base Current	$I_B$	50	mA
Junction Temperature	$T_J$	+125	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	$BV_{CBO}$	$I_C=100\mu\text{A}$ , $I_E=0$	60			V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_C=10\text{mA}$ , $I_B=0$	50			V
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=40\text{V}$ , $I_E=0$			100	nA
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=3\text{V}$ , $I_C=0$			100	nA
DC Current Gain	$h_{FE}$	$V_{CE}=6\text{V}$ , $I_C=1\text{mA}$	90		600	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=100\text{mA}$ , $I_B=10\text{mA}$		0.1	0.3	V
Current Gain Bandwidth Product	$f_T$	$V_{CE}=10\text{V}$ , $I_C=50\text{mA}$	100	190		MHz
Output Capacitance	$C_{ob}$	$V_{CB}=10\text{V}$ , $I_E=0$ , $f=1\text{MHz}$		2.0	3.0	pF
Noise Figure	NF	$I_C=-0.1\text{mA}$ , $V_{CE}=6\text{V}$ $R_G=10\text{k}\Omega$ , $f=100\text{Hz}$		4.0	6.0	dB

■ CLASSIFICATION OF  $h_{FE}$


RANK	R	Q	P	K
RANGE	90-180	135-270	200-400	300-600

## TYPICAL CHARACTERISTICS


Static Characteristics

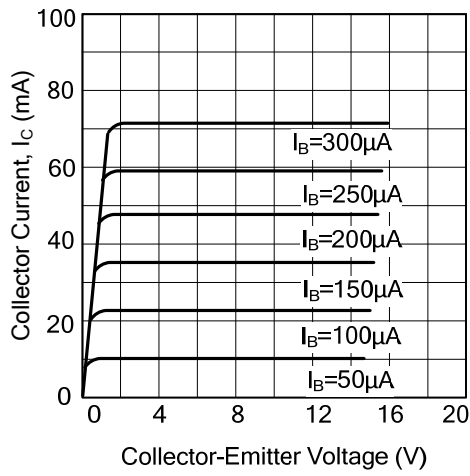


DC Current Gain

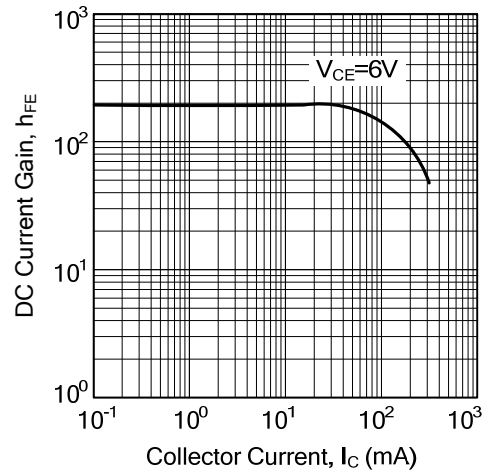


Base-Emitter on Voltage

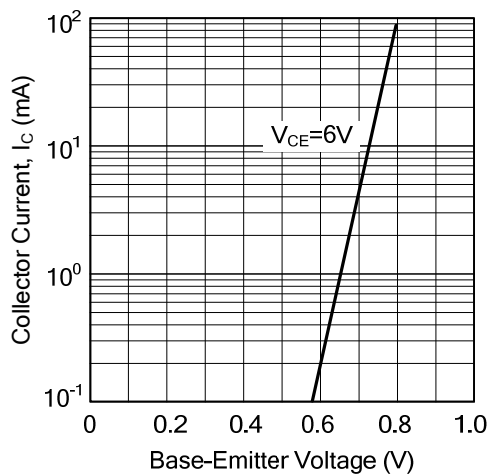


Saturation Voltage

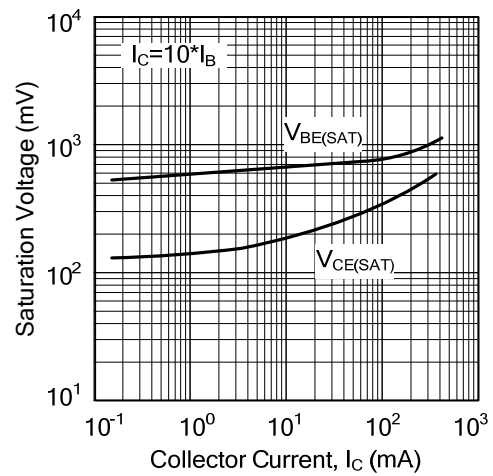


Current Gain-Bandwidth Product

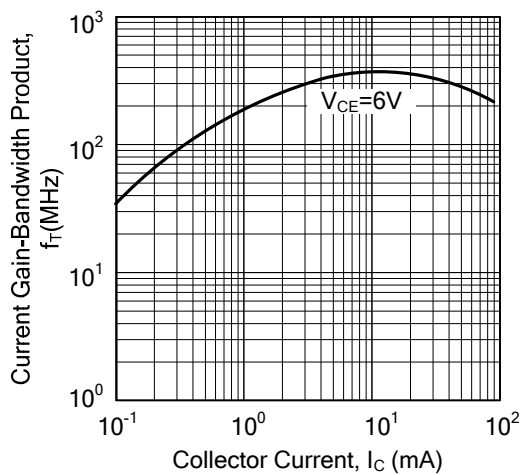

Collector Output Capacitance

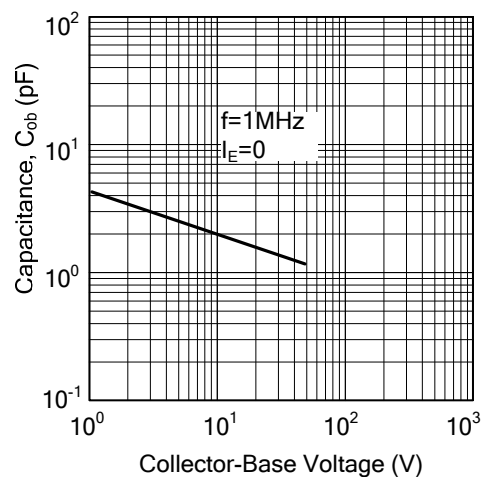

### ■ TYPICAL CHARACTERISTICS (Cont.)

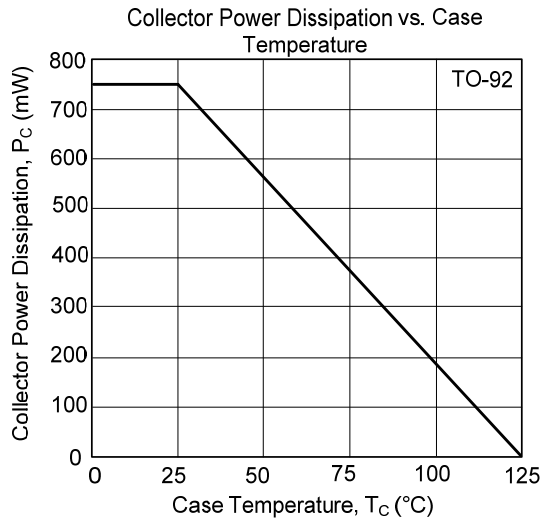

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.