

15 Watts

AEEO4

AEEO1-Dual



Total Power:	15 Watts
Input Voltages:	48V, 24V
No. of Outputs:	Single, Dual

Electrical Specs

Input

Input range 18 to 36 VDC
36 to 72 VDC

Efficiency 86% typical (3.3V)

Output

Voltage tolerance 2.45 - 2.55V (2.5V)
3.24 - 3.36V (3.3V)
4.95 - 5.05V (5.0V)
11.88 - 12.12V (12.0V)
Dual +12 (1%), -12V(5%)

Overall regulation ±1% max
Dual +12V(±1% max)
-12V(±10% max)

Noise/ripple 2.5% (mV P-P) Max
Transient response 2%Vo, 100 usec typical (25% step load change)

Temperature Regulation ±0.04 %Vo/°C

Switching frequency 290kHz

Isolation

I/O isolation 1500 VDC
Input to Case 1500 VDC
Output to Case 1500 VDC

Special Features

- 15 W, Single output
- High Efficiency
- 2:1 Input range
- 1.0" x 2.0" x 0.4 case
- Industry standard package
- Low Profile
- Low Cost

Environmental

Operating base temperature range:
-40°C to +105°C

Storage temperature: -55°C to +125°C

MTBF: 1.5 Million Hours (Belcore TR332)

Safety

UL UL1950 Recognition

CSA CSA22.2-950 Recognition

TUV EN60950 Certified
CE CE Mark

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
 Tower 1, Metroplaza
 223, Hing Fong Road
 Fwai Fong, New Territories
 Hong Kong
 Telephone: 852-2437-9662
 Facsimile: 852-2402-4426



AEE04 / AEE01 - Dual

Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number	Options Available
18-36 V	3.3 @ 4.0 A	85%	AEE04F24-197	
36-72 V	2.5 @ 4.0 A	83%	AEE04G48-197	
36-72 V	3.3 @ 4.0 A	86%	AEE04F48-7	-97, -1, -197
36-72 V	5.0 @ 3.0 A	87%	AEE03A48-7	-97, -1, -197
36-72 V	12.0 @ 1.25 A	87%	AEE01B48-7	-97, -1, -197
36-72 V	±12V @ ±.63A	87	AEE01BB48-7	

Options

-97 = Trim and 6.1mm Pin



-1 = Negative logic enable

-197 = Trim, negative enable, 6.1mm Pin

Positive logic is std.

Note:

-7 = 6.1mm Pin (standard) Consult factory for pin length options

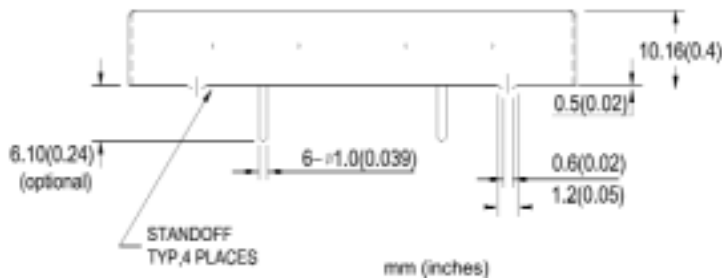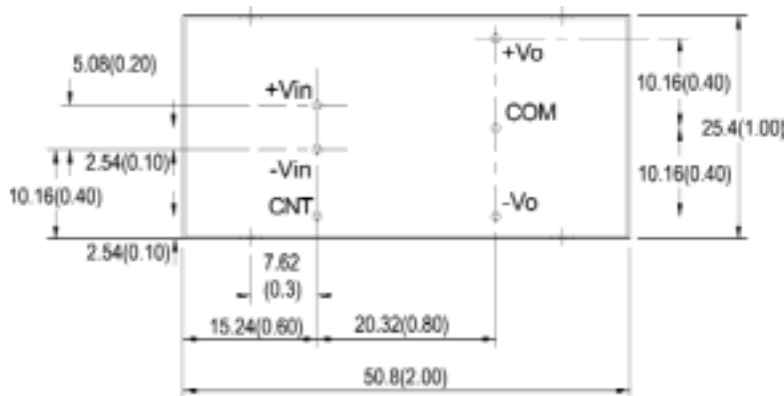

Notes:

1. Refer to Technical Reference Note (App Note) for recommended input/output filtering
2. All specifications are typical at nominal line, full load, and 25°C unless otherwise noted.
3. All specifications subject to change without notice.
4. Mechanical drawings are for reference only.