

AZ100ELT21

Differential PECL to CMOS/TTL Translator

www.azmicrotek.com

DESCRIPTION


The [AZ100ELT21](#) is a differential PECL to CMOS/TTL translator. Because PECL (Positive ECL) levels are used, only V_{CC} and ground are required. The small outline 8-lead packaging and the single gate of the AZ100ELT21 makes it ideal for those applications where space, performance and low power are at a premium.

The AZ100ELT21 is a direct replacement for the ON Semi MC100ELT21

FEATURES

- 3.5ns typical propagation delay
- Differential PECL inputs
- Flow through pinouts
- CMOS/TTL outputs

BLOCK DIAGRAM

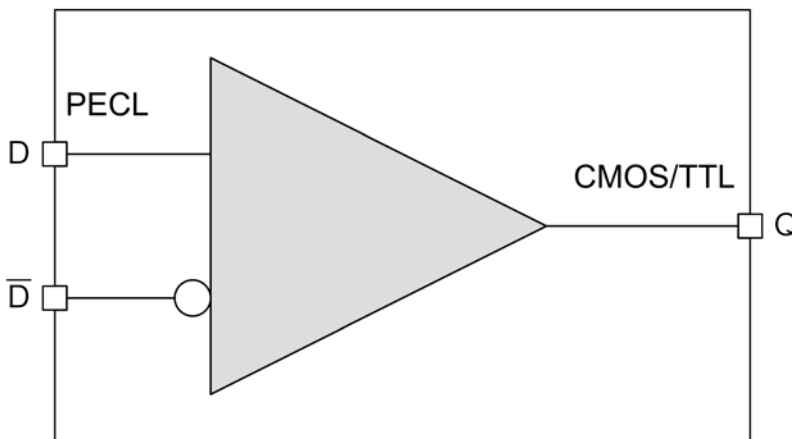

APPLICATIONS

- LVPECL to LVCMOS/LVTTL translations
- PECL to CMOS/TTL translations

PACKAGE AVAILABILITY

- SOIC8
 - Green/RoHS/Pb-Free
- MSOP8
 - Green/RoHS/Pb-Free


Order Number	Package	Marking
AZ100ELT21DG ¹	SOIC8	AZM100GELT21 ²
AZ100ELT21TG ¹	MSOP8	AZHGT21 ²

¹ [Tape & Reel](#) - Add 'R1' at end of order number for 7in (1k parts), 'R2' (2.5k) for 13in

² See www.azmicrotek.com for [date code format](#)

PIN DESCRIPTION AND CONFIGURATION**Table 1 - Pin Description**

Pin	Name	Type	Function
1	NC		
2	D	Input	PECL Input
3	\overline{D}	Input	PECL Input
4	V _{BB}	Output	Reference Voltage Output
5	GND	Power	Ground
6	NC		
7	Q	Output	Data Output
8	V _{CC}	Power	Positive Supply

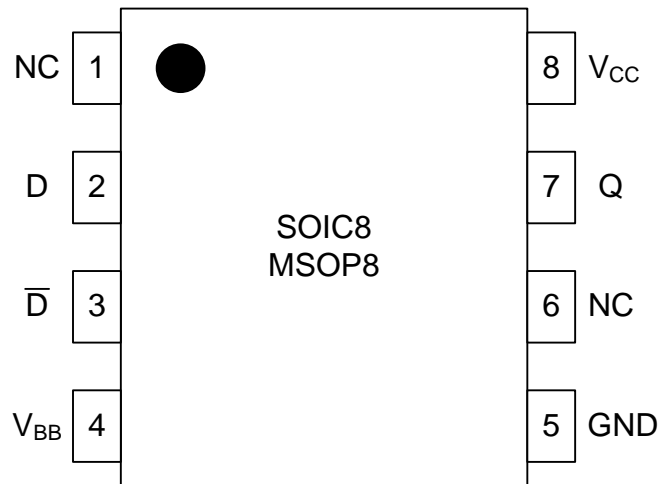**Figure 1 - Pin Configuration for SOIC8/MSOP8**

ENGINEERING NOTES

The ELT21 provides a V_{BB} output for single-ended use or a DC bias reference for AC coupling to the device. For single-ended input applications, the V_{BB} reference should be connected to one side of the D / \overline{D} differential input pair. The input signal is then fed to the other D / \overline{D} input. The V_{BB} pin should be used only as a bias for the AZ100ELT21 as its sink/source capability is limited. When used, the V_{BB} pin should be bypassed to ground via a $0.01\mu\text{F}$ capacitor.

NOTE: Specifications in the ECL/PECL tables are valid when thermal equilibrium is established.

PERFORMANCE DATA

Table 2 – Absolute Maximum Ratings

Absolute Maximum Ratings are those values beyond which device life may be impaired.

Symbol	Characteristic	Condition	Rating	Unit
V_{CC}	DC Power Supply	Referenced to GND	0 to +7.0	V
T_A	Operating Temperature Range		-40 to +85	°C
T_{STG}	Storage Temperature Range		-65 to +150	°C
ESD_{HBM}	Human Body Model		2500	V
ESD_{MM}	Machine Model		200	V
ESD_{CDM}	Charged Device Model		2500	V

Table 3 – TTL/CMOS Input DC Characteristics

TTL/CMOS DC Characteristics ($GND = 0.0V$, $V_{CC} = +3.3V$ to $5.5V$)

Symbol	Characteristic	Condition	Min	Typ	Max	Unit
V_{OH}	Output HIGH Voltage	$I_{OH} = -24\text{mA}$	$V_{CC} - 0.5V$			V
V_{OL}	Output LOW Voltage	$I_{OL} = 24\text{mA}$			0.5	V
I_{CC}	Power Supply Current	0°C to 85°C		9	15	mA
I_{CC}	Power Supply Current	-40°C to 85°C		9	17.6	mA
I_{CC}	Output Short Circuit Current			100		mA

Table 4 - LVPECL DC Characteristics

100K LVPECL DC Characteristics (GND = 0.0V, V_{CC} = +3.3V)

Symbol	Characteristic	-40 °C			0 °C			25 °C			85 °C			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V _{IH}	Input HIGH Voltage	2135		2420	2135		2420	2135		2420	2135		2420	mV
V _{IL}	Input LOW Voltage	1490		1825	1490		1825	1490		1825	1490		1825	mV
V _{BB}	Reference Voltage	1920		2090	1920		2090	1920		2090	1920		2090	mV
V _{PP}	Minimum Input Swing	200 ¹			200			200			200			mV
V _{CMR}	Common Mode Range	1.2		V _{CC}	1.2		V _{CC}	1.2		V _{CC}	1.2		V _{CC}	V
I _{IL}	Input LOW Current	0.5			0.5			0.5			0.5			μA
I _{IH}	Input HIGH Current			150			150			150			150	μA

¹ 200mV input guarantees full logic swing at the output

Table 5 - PECL DC Characteristics

100K PECL DC Characteristics (GND = 0.0V, V_{CC} = +5.0V)

Symbol	Characteristic	-40 °C			0 °C			25 °C			85 °C			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V _{IH}	Input HIGH Voltage	3835		4120	3835		4120	3835		4120	3835		4120	mV
V _{IL}	Input LOW Voltage	3190		3525	3190		3525	3190		3525	3190		3525	mV
V _{BB}	Reference Voltage	3620		3790	3620		3790	3620		3790	3620		3790	mV
V _{PP}	Minimum Input Swing	200 ¹			200 ¹			200 ¹			200 ¹			mV
V _{CMR}	Common Mode Range	1.2		V _{CC}	1.2		V _{CC}	1.2		V _{CC}	1.2		V _{CC}	V
I _{IL}	Input LOW Current	0.5			0.5			0.5			0.5			μA
I _{IH}	Input HIGH Current			150			150			150			150	μA

¹ 200mV input guarantees full logic swing at the output



Table 6 - AC Characteristics

AC Characteristics (GND = 0.0V, V_{CC} = +3.0V to +5.5V)

Symbol	Characteristic	-40 °C			0 °C			25 °C			85 °C			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
t _{PLH} /t _{PHL}	Propagation Delay to Output ₁ V _{CC} = 4.5 to 5.5V	2		5.5	2		5.5	2		5.5	2		5.5	ns
	Propagation Delay to Output ₁ V _{CC} = 3.0 to 3.6V	3.5		7	3.5		7	3.5		7	3.5		7	ns


¹ C_L = 20pF

PACKAGE DIAGRAM
SOIC8
Green/RoHS compliant/Pb-Free
MSL=1

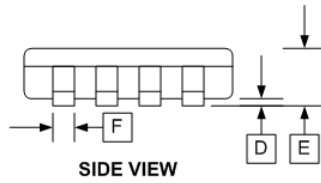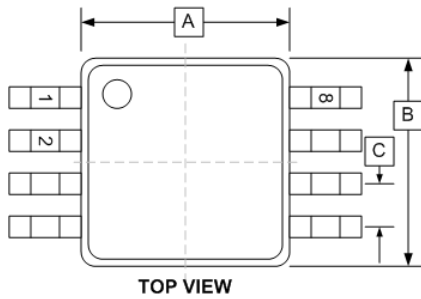


DIM	INCHES	
	MIN	MAX
A	0.189	0.196
B	0.150	0.157
C	0.050 BSC	
D	0.004	0.01
E	0.054	0.068
F	0.014	0.019
G	0.010	
H	0.0075	0.0098
I	0.016	0.034



SOIC8 (D)

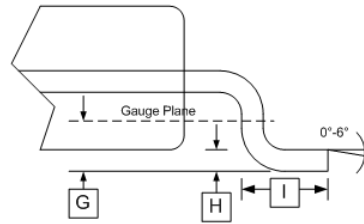


PCB LAND PATTERN/FOOTPRINT

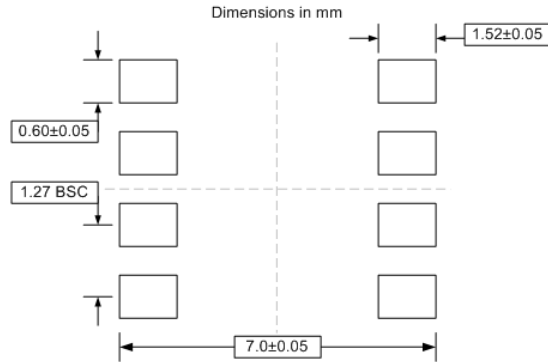


PACKAGE DIAGRAM
MSOP8
 Green/RoHS compliant/Pb-Free
 MSL=1

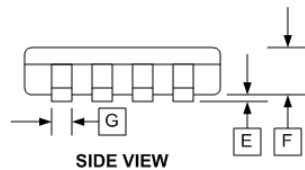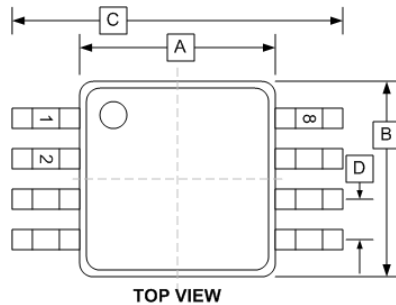

MSOP8 (T)

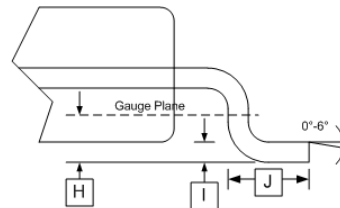

PCB LAND PATTERN/FOOTPRINT

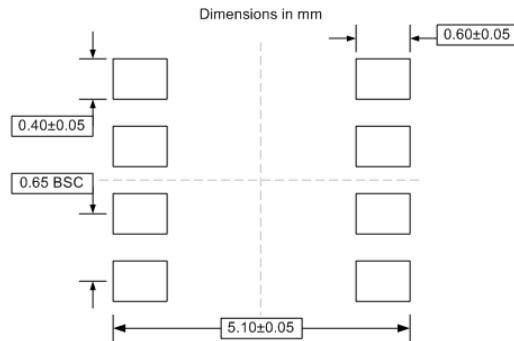

DIM	INCHES	
	MIN	MAX
A	0.118±0.004	
B	0.118±0.004	
C	0.192±0.008	
D	0.0256 TYP	
E	0.004±0.002	
F	0.034±0.002	
G	0.009±0.014	
H	0.010	
I	0.006±0.002	
J	0.021±0.004	

Arizona Microtek, Inc. reserves the right to change circuitry and specifications at any time without prior notice. Arizona Microtek, Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Arizona Microtek, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Arizona Microtek, Inc. does not convey any license rights nor the rights of others. Arizona Microtek, Inc. products are not designed, intended or authorized for use as components in systems intended to support or sustain life, or for any other application in which the failure of the Arizona Microtek, Inc. product could create a situation where personal injury or death may occur. Should Buyer purchase or use Arizona Microtek, Inc. products for any such unintended or unauthorized application, Buyer shall indemnify and hold Arizona Microtek, Inc. and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Arizona Microtek, Inc. was negligent regarding the design or manufacture of the part.