


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- Dual zeners in common anode configuration.
- Ideally suited for automatic insertion.
- ΔV_z for both diodes in one case is $\leq 5\%$.



PACKAGING INFORMATION

- Weight: 0.0074 grams (approximately)

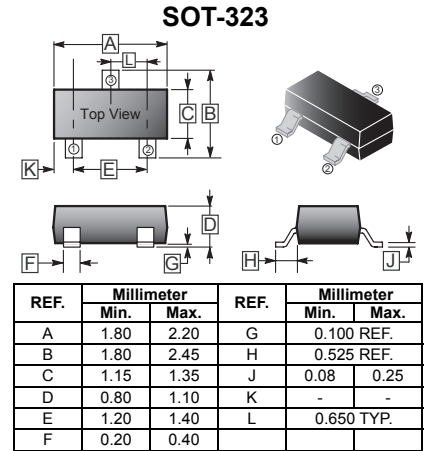

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	VALUE	UNITS
Forward Voltage @ $I_F=10\text{mA}$	V_F	0.9	V
Power Dissipation	P_D	250	mW
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	417	$^{\circ}\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-65~150	$^{\circ}\text{C}$

ELECTRICAL RATINGS (Rating 25°C ambient temperature unless otherwise specified)

TYPE NUMBER	MARKING	$V_z @ I_{ZT}$ (Volts)			Max. Zener Impedance				Max. Reverse Current		Temp. Coefficient Of Zener voltage @ $I_{ZT}=5\text{mA}$ ($\text{mV}/^{\circ}\text{C}$)	
					I_{ZT}	$Z_{ZT} @ I_{ZT}$	I_{ZK}	$Z_{ZK} @ I_{ZK}$	V_R	$I_{R(\text{max})} @ V_R$		
		Min	Nom	Max	mA	Ω	mA	Ω	V	μA	Min	Max
AZ23C5V6W	KD9	5.32	5.6	5.88	5	40	1	400	2.0	1	-2.0	2.5
AZ23C6V8W	KDB	6.47	6.8	7.14	5	15	1	80	4.0	2	1.2	4.5
AZ23C10W	KDF	9.4	10	10.6	5	15	1	70	7.0	0.2	4.5	8.0
AZ23C18W	KDL	16.8	18	19.1	5	50	1	170	12.6	0.1	12.4	16.0

CHARACTERISTIC CURVES

