

# AZ955

## SUBMINIATURE PC BOARD RELAY

### FEATURES

- Subminiature size for high density packaging
- DIL pitch terminals
- Epoxy sealed for automatic wave soldering
- High sensitivity: 150 mW nominal with 84 mW pickup
- Meets FCC Part 68.302 1500 V lightning surge
- Meets FCC Part 68.304 1000 V dielectric
- UL file E43203; CSA file LR 702514



### CONTACTS

<b>Arrangement</b>	SPDT (1 Form C) Bifurcated crossbar contacts
<b>Ratings Light Duty</b>	Resistive load: Max. switched power: 30 W or 60 VA Max. switched current: 1 A Max. switched voltage: 60 VDC or 125 VAC <b>UL Rating:</b> 1 A at 30 VDC 0.3 A at 60 VDC 0.5 A at 125 VAC
<b>Material</b>	Silver alloy, gold clad
<b>Resistance</b>	< 100 milliohms initially

### COIL

<b>Power At Pickup Voltage (typical)</b>	Standard coil: 113 mW Sensitive coil: 84 mW
<b>Max. Continuous Dissipation</b>	.5 W at 20°C (68°F) ambient
<b>Temperature Rise</b>	Standard: 33°C (59°F) at nominal coil voltage Sensitive: 25°C (45°F) at nominal coil voltage
<b>Temperature</b>	Max. 105°C (221°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Other coil resistances and sensitivities available upon request.
4. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy Mechanical Electrical</b>	Minimum operations 10 million operations 1 x 10 <sup>5</sup> at rated load
<b>Operate Time (typical)</b>	Standard: 3 ms at nominal coil voltage Sensitive: 5 ms at nominal coil voltage
<b>Release Time (typical)</b>	1 ms at nominal coil voltage (with no coil suppression)
<b>Capacitance</b>	Coil to contact: 3.0 pF Contact to contact: 3.0 pF
<b>Bounce (typical)</b>	At 10 mA contact current 2 ms at operate 8 ms at release
<b>Dielectric Strength (at sea level for 1 min.)</b>	1250 Vrms coil to contact 500 Vrms between open contacts Meets FCC Part 68.302 1500 V lightning surge Meets FCC Part 68.304 1000 V dielectric
<b>Insulation Resistance</b>	100 megohms min. at 20°C, 500 VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature Operating Storage</b>	At nominal coil voltage Standard: -40°C (-40°F) to 70°C (158°F) Sensitive: -40°C (-40°F) to 80°C (176°F) Both: -25°C (-13°F) to 105°C (221°F)
<b>Vibration</b>	0.039" DA at 10–55 Hz
<b>Shock</b>	10 g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	1.8 grams

**ZETTLER electronics**

Logistic Design (UK) Limited. Unit 3, Eagle Centre Way, Luton LU4 9US www.zettlerrelay.com sales@zettlerrelay.com  
Telephone +44 (0) 1582 599 600 Fax +44 (0) 1582 599 700

# AZ955


## RELAY ORDERING DATA

COIL SPECIFICATIONS: STANDARD COIL				
Nominal Coil VDC	Must. Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	ORDER NUMBER
1.5	1.1	2.4	11.3	AZ955-1C-1.5DE
3	2.3	4.7	45.0	AZ955-1C-3DE
5	3.8	7.9	125	AZ955-1C-5DE
6	4.5	9.5	180	AZ955-1C-6DE
9	6.8	14.2	405	AZ955-1C-9DE
12	9.0	19.0	720	AZ955-1C-12DE
24	18.0	37.9	2880	AZ955-1C-24DE

COIL SPECIFICATIONS: SENSITIVE COIL				
Nominal Coil VDC	Must. Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	ORDER NUMBER
1.5	1.1	2.7	15.0	AZ955-1C-1.5DSE
3	2.3	5.5	60.0	AZ955-1C-3DSE
5	3.8	9.1	167	AZ955-1C-5DSE
6	4.5	11.0	240	AZ955-1C-6DSE
9	6.8	16.4	540	AZ955-1C-9DSE
12	9.0	21.9	960	AZ955-1C-12DSE
24	18.0	43.8	3840	AZ955-1C-24DSE

## MECHANICAL DATA

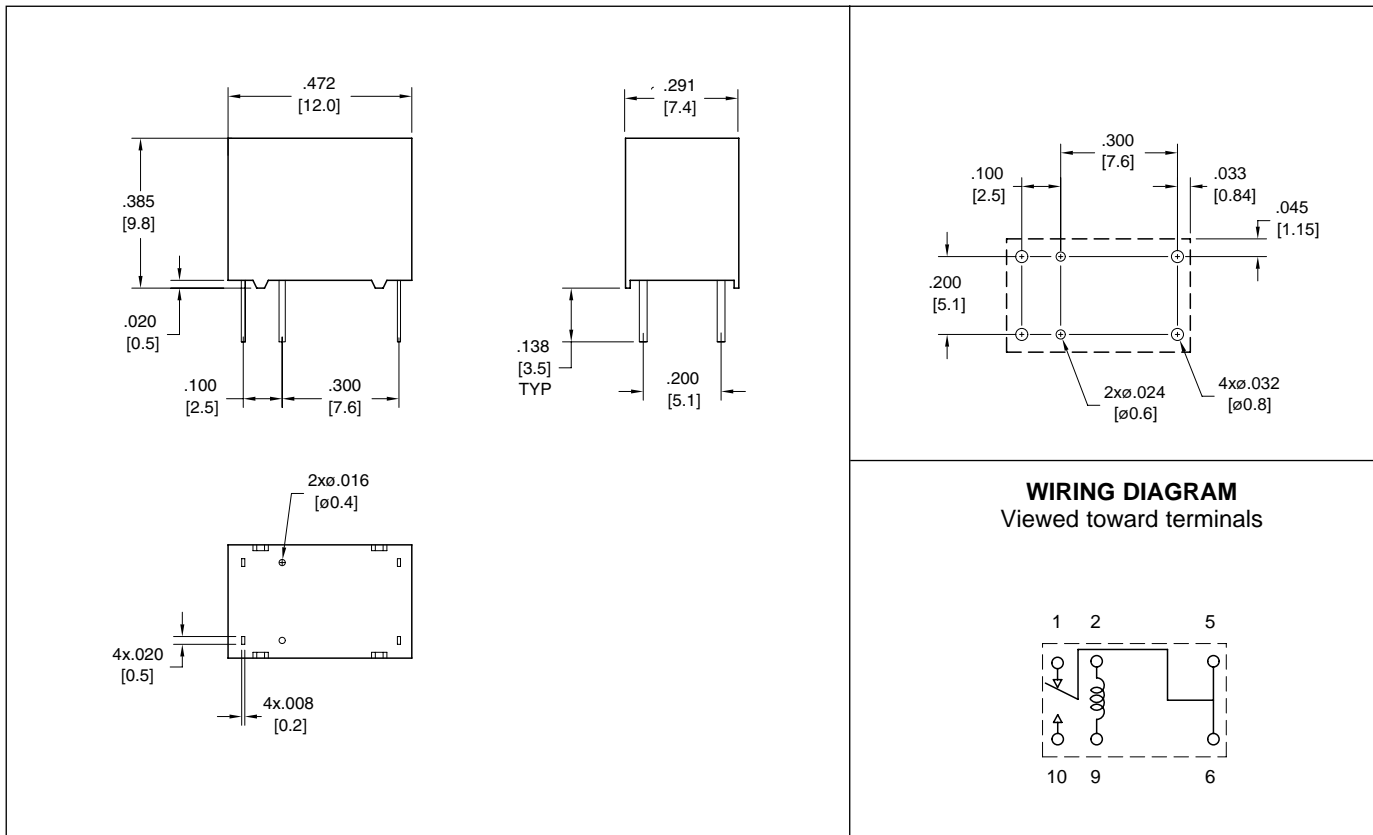

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

**ZETTLER** electronics

Logistic Design (UK) Limited. Unit 3, Eagle Centre Way, Luton LU4 9US [www.zettlerrelay.com](http://www.zettlerrelay.com) [sales@zettlerrelay.com](mailto:sales@zettlerrelay.com)  
 Telephone +44 (0) 1582 599 600 Fax +44 (0) 1582 599 700

2000-10-04