

Small Signal Product
SOD-123 40V/1A Schottky Diode
FEATURES

- Low Forward Voltage Drop
- Surface Mounted Device
- Moisture sensitivity level 1
- Pb free and RoHS compliant


MECHANICAL DATA

- Case: Bend lead SOD-123 package
- High temperature soldering guaranteed: 260°C/10s
- Weight: 10mg (approximately)

SOD-123

APPLICATION

Low voltage, high frequency inverters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)					
PARAMETER	SYMBOL	VALUE			UNIT
		B5817W	B5818W	B5819W	
Non-Peak Repetitive Reverse Voltage	V _{RM}	20	30	40	V
Peak Repetitive Reverse Voltage	V _{RRM}	20	30	40	V
Working Peak Reverse Voltage	V _{RWM}	20	30	40	V
DC Blocking Voltage	V _R	20	30	40	V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	V
Average Rectified Output Current	I _O	1			A
Peak Forward Surge Current @t=8.3ms	I _{FSM}	9			A
Repetitive Peak Forward Current	I _{FRM}	1.5			A
Power Dissipation	P _D	500			mW
Thermal Resistance form Junction to Ambient	R _{thjA}	250			°C/W
Junction Temperature	T _J	125			°C
Storage Temperature Range	T _{STG}	- 55 to + 150			°C

PARAMETER	TEST CONDITION	SYMBOL	MIN	MAX	UNIT
Reverse Breakdown Voltage	at I _R = 1 mA	V _(BR)	B5817W	20	V
			B5818W	30	
			B5819W	40	
Reverse Voltage Leakage Current	at V _R = 20 V at V _R = 30 V at V _R = 40 V	I _R	B5817W	--	mA
			B5818W	--	
			B5819W	1	
Forward Voltage	at I _F = 1 A at I _F = 3 A	V _F	B5817W	0.45	V
			B5818W	0.75	
	at I _F = 1 A at I _F = 3 A		B5818W	0.55	V
			B5819W	0.875	
	at I _F = 1 A at I _F = 3 A		B5819W	0.6	V
			B5819W	0.9	
Diode Capacitance	V _R =4V, f=1.0MHz	C _D	--	120	pF

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Typical Forward Characteristics

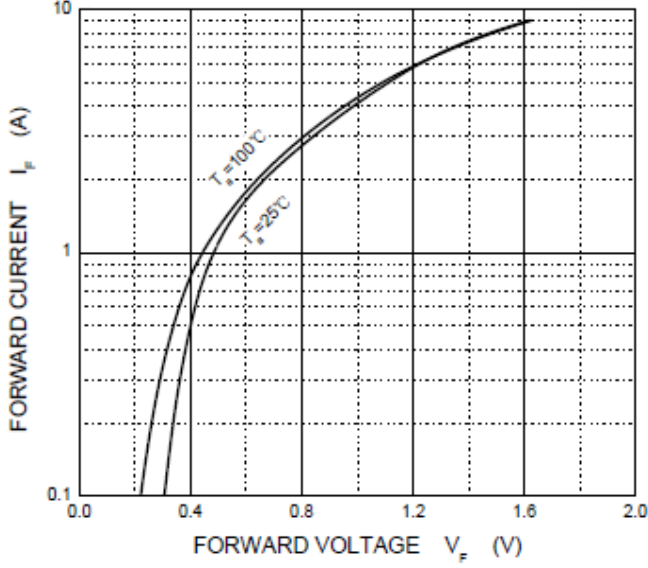


Fig. 2 Typical Reverse Characteristics

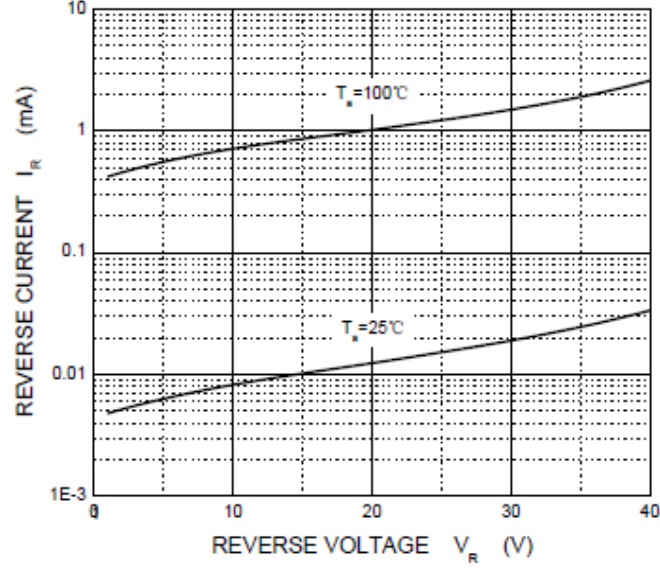


Fig. 3 Typical Capacitance vs. VR


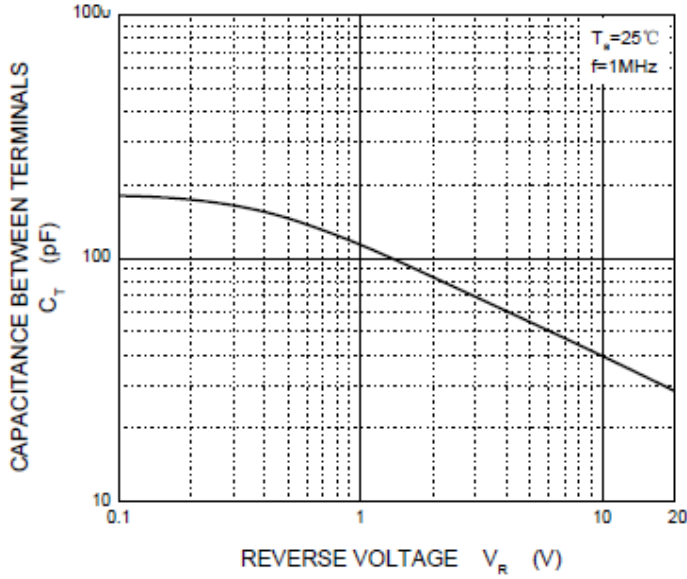


Fig. 4 Power Derating Curve

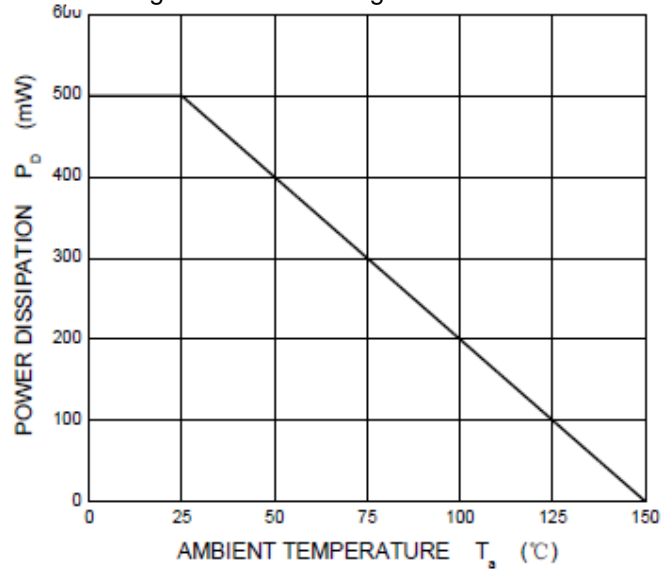

Small Signal Product


ORDERING INFORMATION						
PART NO.	MANUFACTURE CODE	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING	MARKING
B5817W	(Note)	RB	G	SOD-123	3K / 7" Reel	SJ
B5818W		RB	G	SOD-123	3K / 7" Reel	SK
B5819W		RB	G	SOD-123	3K / 7" Reel	SL
B5817W		RP	G	SOD-123	3K / 7" Reel	SJ
B5818W		RP	G	SOD-123	3K / 7" Reel	SK
B5819W		RP	G	SOD-123	3K / 7" Reel	SL

Note: Indicator of manufacturing site for manufacture special control, if empty means no special control requirement

EXAMPLE					
PREFERRED P/N	PART NO.	MANUFACTURE CODE	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
B5817W RPG	B5817W		RP	G	Green compound
B5817W RBG	B5817W		RB	G	Green compound
B5817W-M0 RPG	B5817W	M0	RP	G	Green compound
B5817W-N0 RBG	B5817W	N0	RB	G	Green compound


Small Signal Product

**PACKAGE OUTLINE DIMENSIONS
SOD-123**

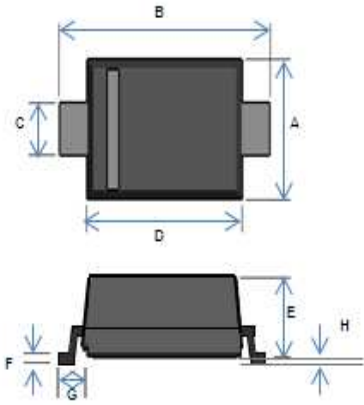

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.40	1.80	0.055	0.071
B	3.55	3.85	0.140	0.152
C	0.45	0.70	0.018	0.028
D	2.55	2.85	0.100	0.112
E	0.95	1.35	0.037	0.053
F	0.05	0.15	0.002	0.006
G	0.50 REF		0.02 REF	
H	-	0.10	-	0.004

SUGGESTED PAD LAYOUT

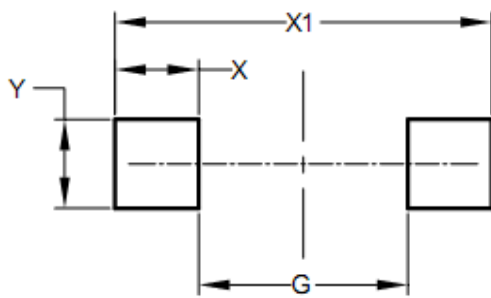

DIM.	Unit (mm)	Unit (inch)
	Min	Min
G	2.25	0.089
X	0.90	0.035
X1	4.05	0.159
Y	0.95	0.037

Small Signal Product**Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.