




B5817WS THRU B5819WS

Schottky Barrier Rectifiers**FEATURES**

- Metal silicon junction, majority carrier conduction
- Guarding for overvoltage protection
- Low power loss, high efficiency
- High current capability
- low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Cathode |
| 2 | Anode |

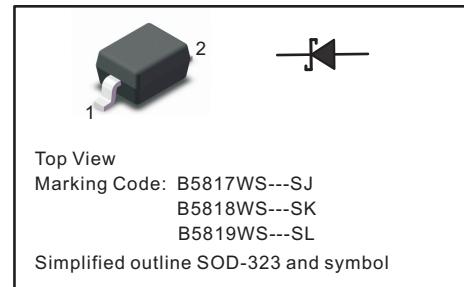**MECHANICAL DATA**

- Case: SOD-323
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 5.48mg / 0.00019oz

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

| Parameter | Symbols | B5817WS | B5818WS | B5819WS | Units |
|---|----------------|--------------|---------------|------------|-------|
| Maximum Repetitive Peak Reverse Voltage | V_{RRM} | 20 | 30 | 40 | V |
| Maximum RMS voltage | V_{RMS} | 14 | 21 | 28 | V |
| Maximum DC Blocking Voltage | V_{DC} | 20 | 30 | 40 | V |
| Maximum Average Forward Rectified Current | $I_{F(AV)}$ | | 1 | | A |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load (JEDEC method) | I_{FSM} | | 9 | | A |
| Maximum Instantaneous Forward Voltage at 1 A at 3 A | V_F | 0.45 0.75 | 0.55 0.875 | 0.6 0.9 | V |
| Maximum Instantaneous Reverse Current at TA = 25°C Rated DC Reverse Voltage TA = 100°C | I_R | | 1 10 | | mA |
| Typical Junction Capacitance | C_j | | 110 | | pF |
| Storage and Operating Junction Temperature Range | T_j, T_{stg} | | -55 ~ +150 | | °C |



B5817WS THRU B5819WS

Schottky Barrier Rectifiers

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

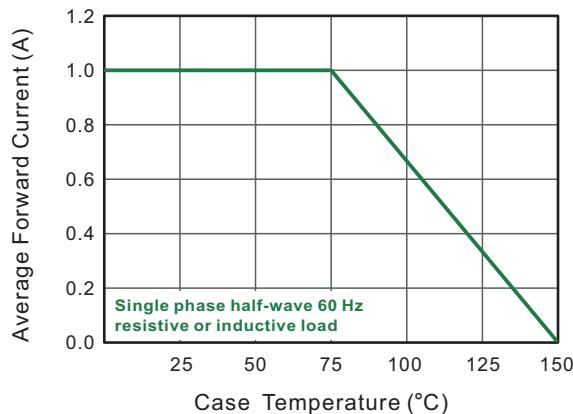


Fig.2 Typical Reverse Characteristics

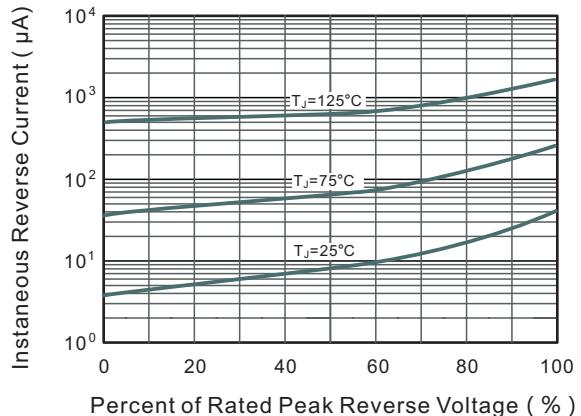


Fig.3 Typical Forward Characteristic

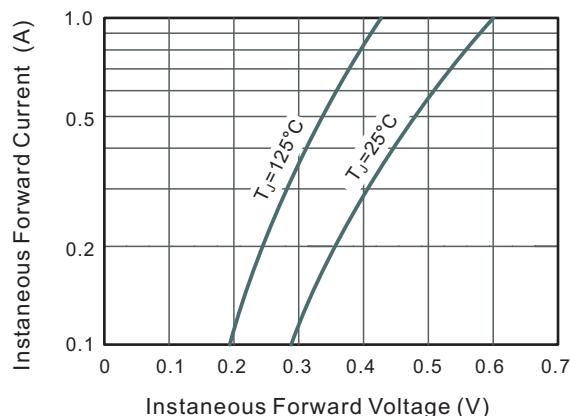


Fig.4 Typical Junction Capacitance


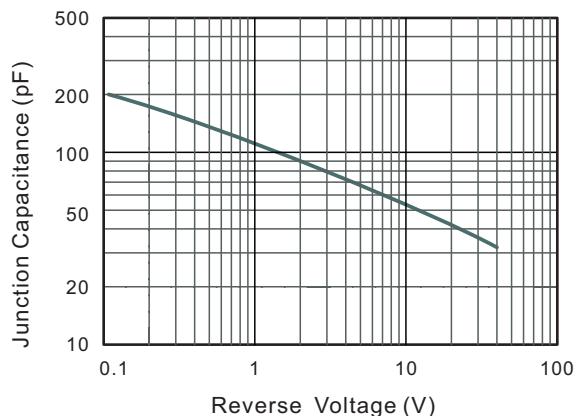


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



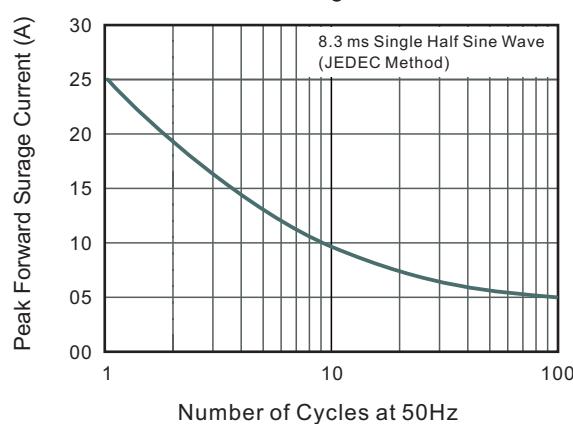


B5817WS THRU B5819WS

Schottky Barrier Rectifiers

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-323

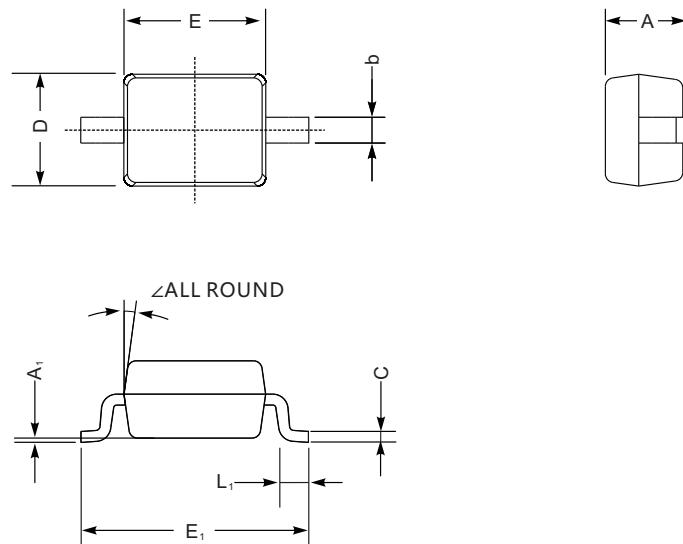

SOD-323 mechanical data

| UNIT | | A | C | D | E | E ₁ | b | L ₁ | A ₁ | ∠ |
|------|-----|-----|------|-----|-----|----------------|------|----------------|----------------|----|
| mm | max | 1.1 | 0.15 | 1.4 | 1.8 | 2.75 | 0.4 | 0.45 | 0.2 | 9° |
| | min | 0.8 | 0.08 | 1.2 | 1.4 | 2.55 | 0.25 | 0.2 | — | |
| mil | max | 43 | 5.9 | 55 | 70 | 108 | 16 | 16 | 8 | 9° |
| | min | 32 | 3.1 | 47 | 63 | 100 | 9.8 | 7.9 | — | |

The recommended mounting pad size

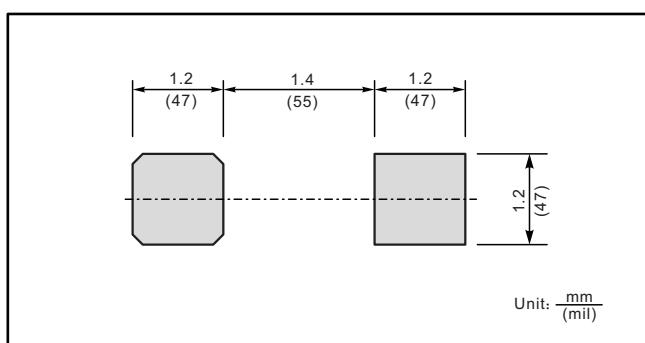

Marking

| Type number | Marking code |
|-------------|--------------|
| B5817WS | SJ |
| B5818WS | SK |
| B5819WS | SL |