



BAS316

DIODE

HIGH-SPEED DIODE

DESCRIPTION



The UTC **BAS316** is high-speed diode, it uses UTC's advanced technology to provide customers with high switching speed, etc.

The UTC **BAS316** is suitable for high-speed switching in e.g. surface mounted circuits.

FEATURES

* High switching speed

SYMBOL

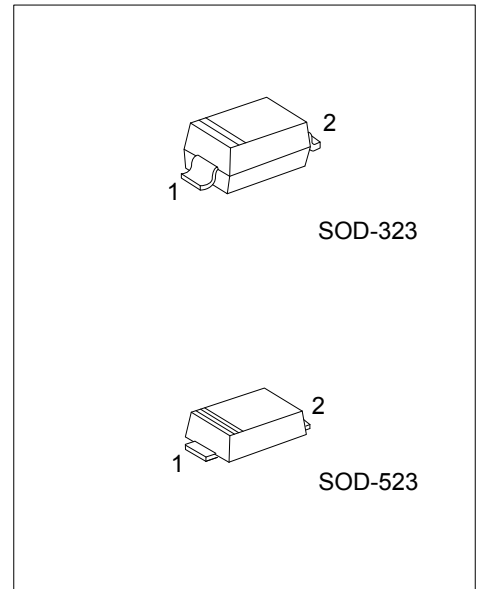


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
BAS316L-CB2-R	BAS316G-CB2-R	SOD-323	K	A	Tape Reel
BAS316L-CC2-R	BAS316G-CC2-R	SOD-523	K	A	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>BAS316G-CB2-R</p> <p>(1)Packing Type (2)Package Type (3)Green Package</p>	<p>(1) R: Tape Reel (2) CB2 : SOD-323, CC2: SOD-523 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---

MARKING



■ ABSOLUTE MAXIMUM RATINGS

PARAMETER			SYMBOL	RATINGS	UNIT
repetitive Peak Reverse Voltage			V_{RRM}	85	V
Continuous Reverse Voltage			V_R	75	V
Continuous Forward Current	$T_S=90^{\circ}\text{C}$ (Note 1)		I_F	250	mA
Repetitive Peak Forward Current			I_{FRM}	500	mA
Non-Repetitive Peak Forward Current	Square Wave, $T_J=25^{\circ}\text{C}$ Prior to Surge	$t=1\mu\text{s}$	I_{FSM}	4	A
		$t=1\text{ms}$		1	A
		$t=1\text{s}$		0.5	A
Total Power Dissipation	$T_S=90^{\circ}\text{C}$ (Note 1)		P_D	400	mW
Operating Junction Temperature			T_J	+150	$^{\circ}\text{C}$
Storage Temperature			T_{STG}	-65 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Soldering Point (Note 2)	θ_{JS}	150	K/W


Notes: 1. T_S is the temperature at the soldering point of the cathode tab.

2. Soldering point of the cathode tab.

■ ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	V_F	$I_F=1\text{mA}$			715	mV
		$I_F=10\text{mA}$			855	mV
		$I_F=50\text{mA}$			1	V
		$I_F=150\text{mA}$			1.25	V
Reverse Current	I_R	$V_R=25\text{V}$			30	nA
		$V_R=75\text{V}$			1	μA
		$V_R=25\text{V}$, $T_J=150^{\circ}\text{C}$			30	μA
		$V_R=75\text{V}$, $T_J=150^{\circ}\text{C}$			50	μA
Diode Capacitance	C_D	$f=1\text{MHz}$, $V_R=0$			1.5	pF
Reverse Recovery Time	t_{rr}	When Switched from $I_F=10\text{mA}$ to $I_R=10\text{mA}$, $R_L=100\Omega$, Measured at $I_R=1\text{mA}$, See Fig.1			4	ns
Forward Recovery Voltage	V_{fr}	When Switched from $I_F=10\text{mA}$, $t_r=20\text{ns}$, See Fig.2			1.75	V


TEST CIRCUITS AND WAVEFORMS

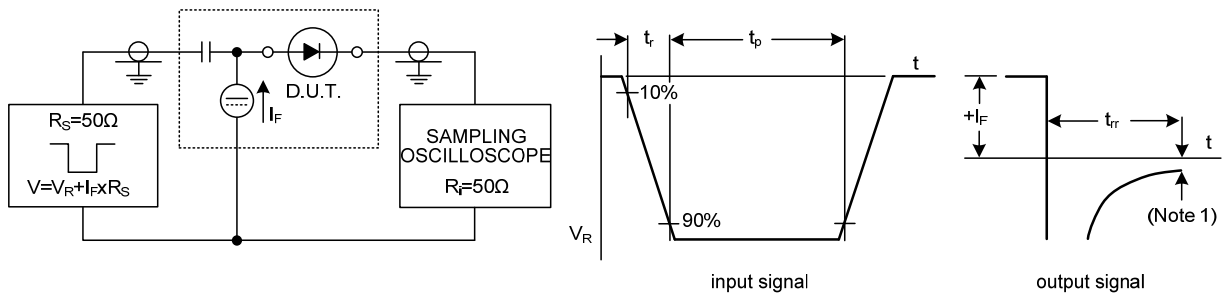

Note 1. $I_R=1\text{mA}$.

Input signal: reverse pulse rise time $t_r=0.6\text{ns}$; reverse voltage pulse duration $t_p=100\text{ns}$; duty factor $\delta=0.05$;
Oscilloscope: rise time $t_f=0.35\text{ns}$.

Fig.1 Reverse Recovery Voltage Test Circuit and Waveforms.

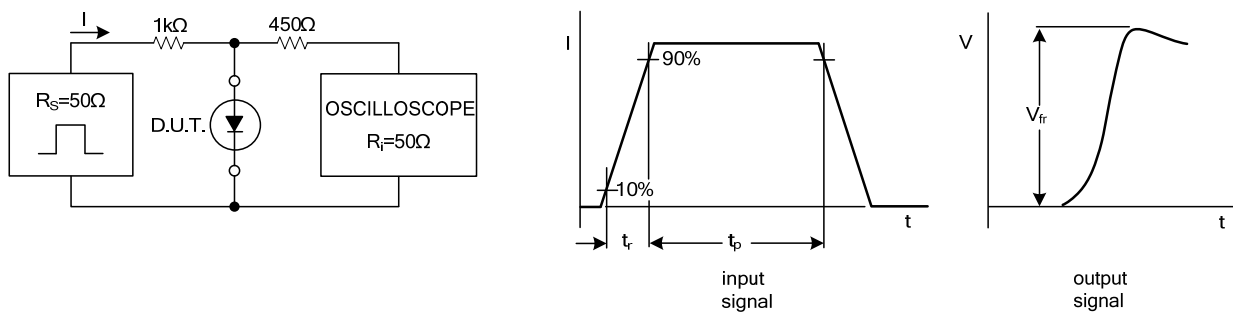

Input signal: forward pulse rise time $t_r=20\text{ns}$; forward current pulse duration $t_p \geq 100\text{ns}$; duty factor $\delta \leq 0.005$.

Fig.2 Forward Recovery Voltage Test Circuit and Waveforms.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.