

Surface Mount Schottky Barrier Diodes


Features:

- *Extremely Fast Switching Speed
- *Low Forward Voltage
- *Very Small Conduction Losses
- *Schottky Barrier Diodes Encapsulated in a SOT-23 Package

Description:

These schottky barrier diodes are designed for high speed switching applications circuit protection, and voltage clamping, Extremely low forward voltage reduces conduction loss, Miniature surface mount package is excellent for hand held and portable applications where space is limited.


**SMALL SIGNAL
SCHOTTKY DIODES**
70m AMPERES
70 VOLTS



SOT-23

SOT-23 Outline Dimensions

Unit:mm

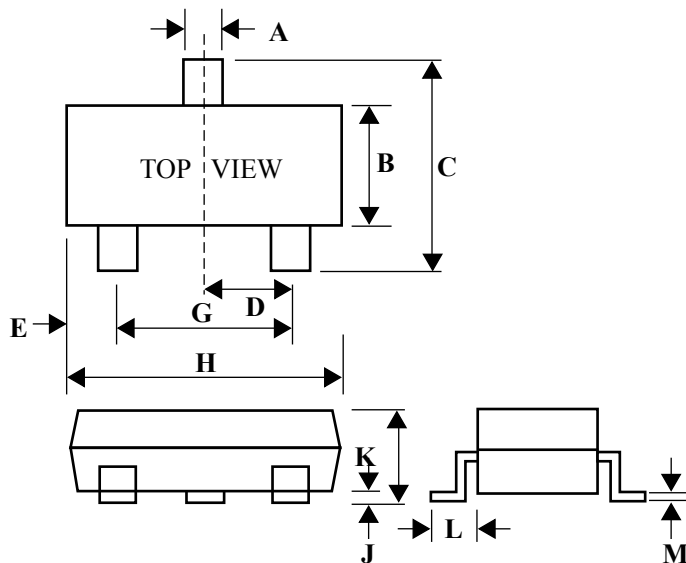

Dim	Min	Max
A	0.35	0.51
B	1.19	1.40
C	2.10	3.00
D	0.85	1.05
E	0.46	1.00
G	1.70	2.10
H	2.70	3.10
J	0.01	0.13
K	0.89	1.10
L	0.30	0.61
M	0.076	0.25

Maximum Ratings (TA=25°C Unless otherwise noted)

Characteristic	Symbol	Value	Unit
Reverse Voltage	VR	70	V
Average Rectifier Forward Current	IF(AV)	70	mA
Operating Junction Temperature Range	TJ	-55 to +125	°C
Storage Temperature Range	Tstg	-55 to +150	°C

Electrical Characteristics (TA=25°C Unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
Reverse Breakdown Voltage (IR=100µA)	V(BR)R	70	-	Volts
Forward Voltage IF=1.0mA IF=15mA	VF	-	0.41 1.00	Volts
Total Capacitance (VR=0V, f=1.0MHz)	CT	-	2	PF
Reverse Leakage VR=50V	IR	-	0.1	µA _{dc}
Reverse Recover Time IF=IR =10mA, IR(Rec)=1.0mA	Trr	-	5.0	nS

Device Marking

Item	Marking	Equivalent Circuitdiagram
BAS70	73, BE	
BAS70-04	74, CG	
BAS70-05	75, EH	
BAS70-06	76, GK	