


### Features

- Ideally Suited for Automatic Insertion
- Epitaxial Planar Die Construction
- For Switching, AF Driver and Amplifier Applications
- Complementary PNP Types Available (BC807)

### Mechanical Data

- Case: SOT-23, Molded Plastic
- Case material - UL Flammability Rating Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Pin Connections: See Diagram
- Marking (See Page 3): BC817-16 6A, K6A  
BC817-25 6B, K6B  
BC817-40 6C, K6C
- Ordering & Date Code Information: See Page 3
- Approx. Weight: 0.008 grams

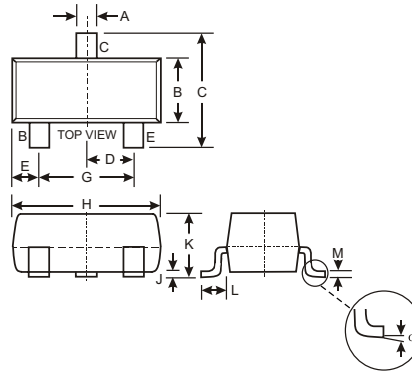

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.85	0.80
$\alpha$	0°	8°
All Dimensions in mm		

### Maximum Ratings @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Emitter Voltage	V <sub>CEO</sub>	45	V
Emitter-Base Voltage	V <sub>EBO</sub>	5.0	V
Collector Current	I <sub>C</sub>	800	mA
Peak Collector Current	I <sub>CM</sub>	1000	mA
Peak Emitter Current	I <sub>EM</sub>	1000	mA
Power Dissipation at T <sub>SB</sub> = 50°C (Note 1)	P <sub>d</sub>	310	mW
Thermal Resistance, Junction to Substrate Backside (Note 1)	R <sub>θSB</sub>	320	°C/W
Thermal Resistance, Junction to Ambient Air (Note 1)	R <sub>θJA</sub>	403	°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to +150	°C

### Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic (Note 2)	Symbol	Min	Max	Unit	Test Condition	
DC Current Gain Current Gain Group -16 -25 -40 Current Gain Group -16 -25 -40	h <sub>FE</sub>	100	250	—	V <sub>CE</sub> = 1.0V, I <sub>C</sub> = 100mA	
		160	400			
		250	600			
		60	—			V <sub>CE</sub> = 1.0V, I <sub>C</sub> = 300mA
		100	—			
170	—					
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	—	0.7	V	I <sub>C</sub> = 500mA, I <sub>B</sub> = 50mA	
Base-Emitter Voltage	V <sub>BE</sub>	—	1.2	V	V <sub>CE</sub> = 1.0V, I <sub>C</sub> = 300mA	
Collector-Emitter Cutoff Current	I <sub>CES</sub>	—	100 5.0	nA μA	V <sub>CE</sub> = 45V V <sub>CE</sub> = 25V, T <sub>j</sub> = 150°C	
Emitter-Base Cutoff Current	I <sub>EBO</sub>	—	100	nA	V <sub>EB</sub> = 4.0V	
Gain Bandwidth Product	f <sub>T</sub>	100	—	MHz	V <sub>CE</sub> = 5.0V, I <sub>C</sub> = 10mA, f = 50MHz	
Collector-Base Capacitance	C <sub>CBO</sub>	—	12	pF	V <sub>CB</sub> = 10V, f = 1.0MHz	

- Notes: 1. Device mounted on Ceramic Substrate 0.7mm; 2.5cm<sup>2</sup> area.  
2. Short duration pulse test used to minimize self-heating effect.

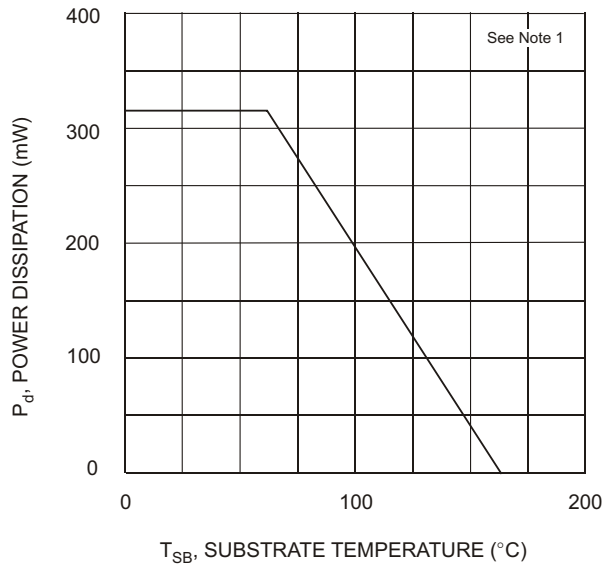


Fig. 1, Power Derating Curve

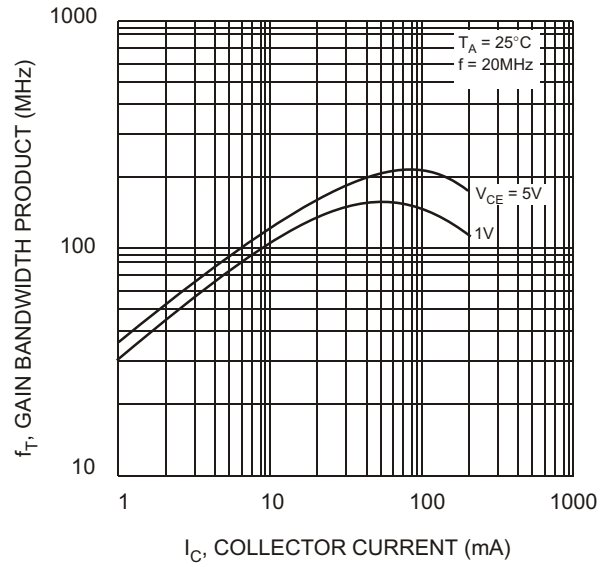


Fig. 2, Gain-Bandwidth Product vs Collector Current

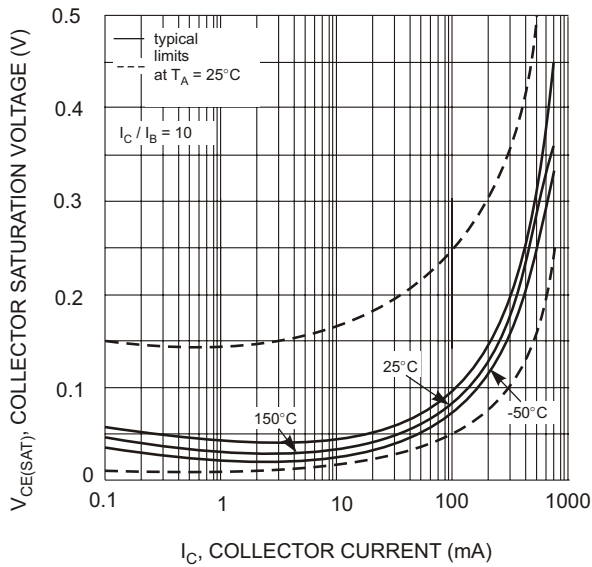


Fig. 3, Collector Sat. Voltage vs Collector Current

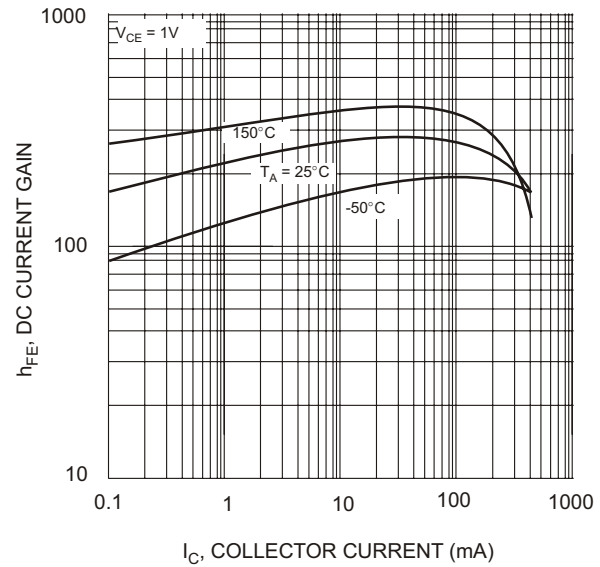


Fig. 4, DC Current Gain vs Collector Current

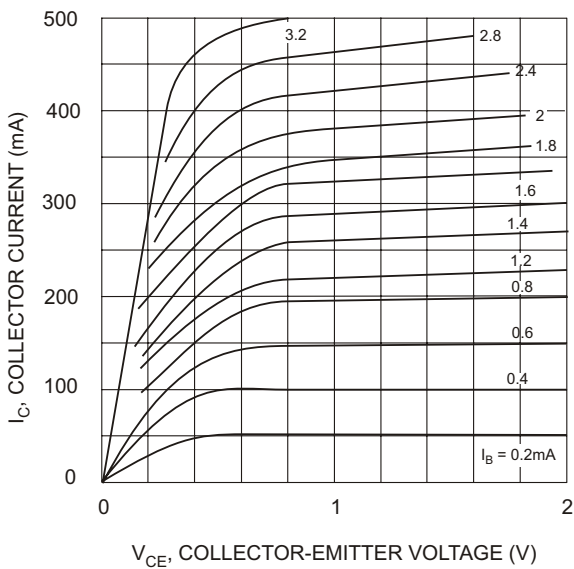


Fig. 5, Typical Emitter-Collector Characteristics

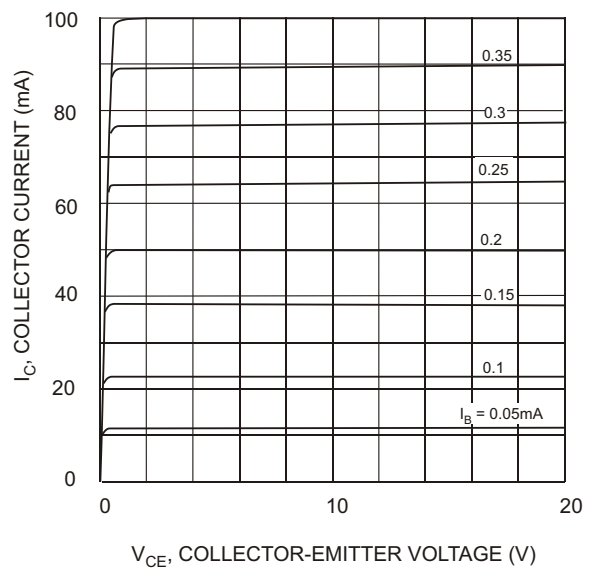


Fig. 6, Typical Emitter-Collector Characteristics


## Ordering Information (Note 3)

Device*	Packaging	Shipping
BC817-xx-7	SOT-23	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

\* xx = gain group, e.g. BC817-16-7.

## Marking Information



XXX = Product Type Marking Code (See Page 1), e.g. K6A = BC817-16

YM = Date Code Marking

Y = Year ex: N = 2002

M = Month ex: 9 = September

### Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004
Code	J	K	L	M	N	P	R

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D