

CentralTM Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors
www.centrasemi.com

BCY78, VII, VIII, IX, X
BCY79, VII, VIII, IX, X

PNP SILICON TRANSISTOR

JEDEC TO-18 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR BCY78, BCY79 Series types are Silicon PNP Epitaxial Planar Transistors, mounted in a hermetically sealed metal case, designed for low noise amplifier and switching applications.

MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

	<u>SYMBOL</u>	<u>BCY78</u>	<u>BCY79</u>	<u>UNITS</u>
Collector-Base Voltage	V _{CBO}	32	45	V
Collector-Emitter Voltage	V _{CEO}	32	45	V
Emitter-Base Voltage	V _{EBO}	5.0		V
Collector Current	I _C	100		mA
Collector Current (Peak)	I _{CM}	200		mA
Base Current (Peak)	I _{BM}	200		mA
Power Dissipation	P _D	340		mW
Power Dissipation(T _C =25°C)	P _D	1.0		W
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +200		°C
Thermal Resistance	θ _{JA}	450		°C/W
Thermal Resistance	θ _{JC}	150		°C/W

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
I _{CBO}	V _{CB} = Rated V _{CBO}		15	nA
I _{CBO}	V _{CB} = Rated V _{CBO} , T _A =150°C		10	μA
I _{EBO}	V _{EB} =5.0V		20	nA
BV _{CBO}	I _C =10μA (BCY78)	32		V
BV _{CBO}	I _C =10μA (BCY79)	45		V
BV _{CEO}	I _C =2.0mA (BCY78)	32		V
BV _{CEO}	I _C =2.0mA (BCY79)	45		V
BV _{EBO}	I _E =1.0μA	5.0		V
V _{CE(SAT)}	I _C =10mA, I _B =250μA		0.25	V
V _{CE(SAT)}	I _C =100mA, I _B =2.5mA		0.80	V
V _{BE(SAT)}	I _C =10mA, I _B =250μA	0.60	0.85	V
V _{BE(SAT)}	I _C =100mA, I _B =2.5mA	0.70	1.20	V
V _{BE(ON)}	V _{CE} =5.0V, I _C =2.0mA	0.60	0.75	V


<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	BCY78-VII		BCY78-VIII		BCY78-IX		BCY78-X	
		<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>
h _{FE}	V _{CE} =5.0V, I _C =10μA	140 TYP		30		40		100	
h _{FE}	V _{CE} =5.0V, I _C =2.0mA	120	220	180	310	250	460	380	630
h _{FE}	V _{CE} =1.0V, I _C =10mA	80		120	400	160	630	240	1000
h _{FE}	V _{CE} =1.0V, I _C =100mA	40		45		60		60	

(SEE REVERSE SIDE)

ELECTRICAL CHARACTERISTICS Continued

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNITS</u>
f_T	$V_{CE}=5.0V, I_C=10mA, f=100MHz$	100			MHz
C_{ob}	$V_{CB}=10V, I_E=0, f=1.0MHz$			7.0	pF
C_{ib}	$V_{EB}=0.5V, I_C=0, f=1.0MHz$			15	pF
NF	$V_{CE}=5.0V, I_C=200\mu A, R_S=2k\Omega, f=1.0kHz, B=200Hz$			10	dB
t_{on}	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			100	ns
t_d	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			50	ns
t_r	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			50	ns
t_{off}	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			700	ns
t_s	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			600	ns
t_f	$V_{CC}=3.0V, I_C=10mA, I_{B1}=-I_{B2}=1.0mA$			100	ns
t_{on}	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			100	ns
t_d	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			35	ns
t_r	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			65	ns
t_{off}	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			400	ns
t_s	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			300	ns
t_f	$V_{CC}=10V, I_C=100mA, I_{B1}=-I_{B2}=10mA$			100	ns

TO-18 PACKAGE - MECHANICAL OUTLINE

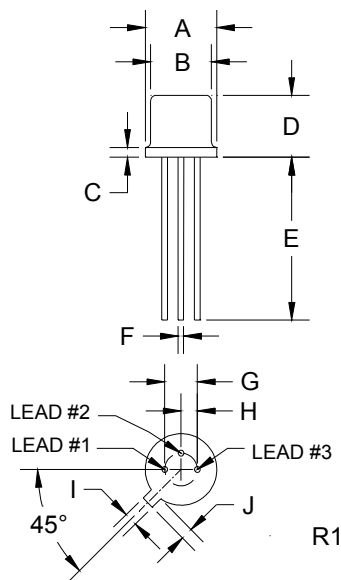

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

Lead Code

1. Emitter
2. Base
3. Collector

CentralTM
Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

www.centralsemi.com