

isc Silicon NPN Power Transistor

BU508A

DESCRIPTION

- Collector-Emitter Sustaining Voltage-  
:  $V_{CEX} = 1500V(\text{Min})$
- High Power Dissipation-  
:  $P_D = 125W @ T_C = 25^\circ C$
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Designed for use in large screen color deflection circuits.

ABSOLUTE MAXIMUM RATINGS( $T_a = 25^\circ C$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CES}$	Collector- Emitter Voltage( $V_{BE} = 0$ )	1500	V
$V_{CEO}$	Collector-Emitter Voltage	700	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current-Continuous	8	A
$I_{CM}$	Collector Current-Peak	15	A
$I_B$	Base Current- Continuous	4	A
$I_{BM}$	Base Current-Peak	6	A
$P_C$	Collector Power Dissipation @ $T_C = 25^\circ C$	125	W
$T_j$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-65~150	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.0	$^\circ C/W$

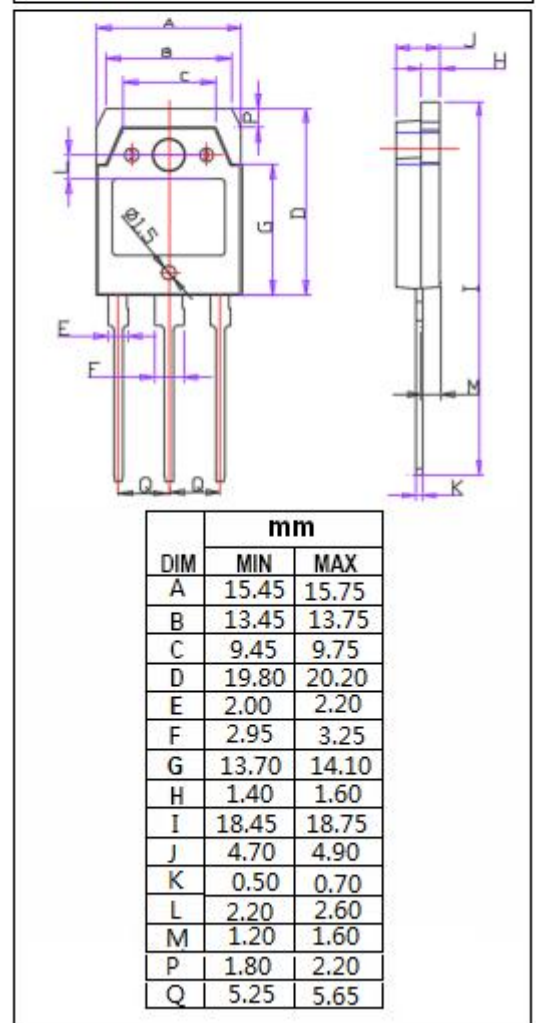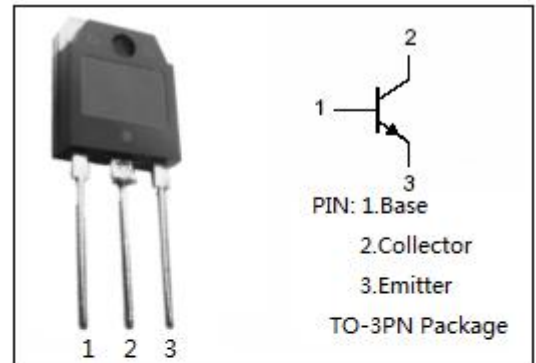

## isc Silicon NPN Power Transistor

BU508A

## ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=30\text{mA}; I_B=0$	700			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=4.5\text{A}; I_B=2.0\text{A}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=4.5\text{A}; I_B=2.0\text{A}$			1.3	V
$I_{CES}$	Collector Cutoff Current	$V_{CE}=1500\text{V}; V_{BE}=0$ $V_{CE}=1500\text{V}; V_{BE}=0; T_C=125^\circ\text{C}$			1.0 2.0	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5.0\text{V}; I_C=0$			0.1	mA
$h_{FE}$	DC Current Gain	$I_C=0.1\text{A}; V_{CE}=5\text{V}$	6		30	
$C_{OB}$	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f_{test}=0.1\text{MHz}$	125			pF
$f_T$	Current-Gain—Bandwidth Product	$I_C=0.1\text{A}; V_{CE}=5\text{V}; f_{test}=1.0\text{MHz}$		7		MHz

Pulsed: Pulse duration  $\leq 300\ \mu\text{s}$ , duty cycle  $\leq 1.5\%$