

# BY251 THRU BY255


## MEDIUM CURRENT PLASTIC RECTIFIER

VOLTAGE - 200 to 1300 Volts CURRENT - 3.0 Amperes

### FEATURES

- High surge current capability
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Low leakage
- Void-free molded in DO-201AD plastic package
- High current operation of 3 Amperes at  $T_A=95$  with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228

### DO-201AD

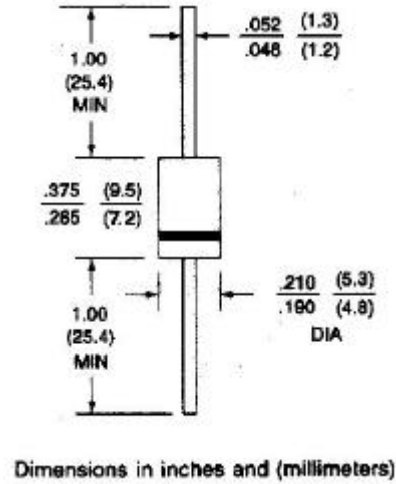

### MECHANICAL DATA

Case: JEDEC DO-201AD Molded plastic

Terminals: Plated axial leads, solderable per MIL-STD-750,

Method 2026

Polarity: Color band denotes cathode

Mounting Position: Any

Weight: 0.04 ounce, 1.1 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 ambient temperature unless otherwise specified.

60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

|  | SYMBOLS    | BY251       | BY252 | BY253 | BY254 | BY255 | UNITS |
|--|------------|-------------|-------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage   | $V_{RRM}$  | 200         | 400   | 600   | 800   | 1300  | Volts |
| Maximum RMS Voltage  | $V_{RMS}$  | 140         | 280   | 420   | 560   | 910   | Volts |
| Maximum DC Blocking Voltage  | $V_{DC}$   | 200         | 400   | 600   | 800   | 1300  | Volts |
| Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_A=95$                   | $I_{(AV)}$ | 3.0         |       |       |       |       | Amps  |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) | $I_{FSM}$  | 100.0       |       |       |       |       | Amps  |
| Maximum Instantaneous Forward Voltage $T_J=25$ at 3.0A   | $V_F$      | 1.1         |       |       |       |       | Volts |
|  |            | 1.0         |       |       |       |       | Volts |
| Maximum DC Reverse Current $T_A=25$ at Rated DC Blocking Voltage $T_A=100$                       | $I_R$      | 5.0         |       |       |       |       | A     |
|  |            | 1000        |       |       |       |       | A     |
| Typical Junction capacitance (Note 2) $T_J=25$   | $C_J$      | 40          |       |       |       |       | pF    |
| Typical Reverse Recovery Time (Note 3)   | $T_{RR}$   | 2.5         |       |       |       |       | A     |
| Typical Thermal Resistance (Note 1)  | $R_{JA}$   | 15.0        |       |       |       |       | /W    |
| Operating Junction Temperature Range   | $T_J$      | -50 to +150 |       |       |       |       |       |
| Storage Temperature Range  | $T_{STG}$  | -50 to +150 |       |       |       |       |       |

NOTES:

1. Thermal Resistance From Junction to applied at Ambient 0.375"(9.5mm) lead length P.C.Board mounted.
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
3. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{rr}=0.25A$ .

RATING AND CHARACTERISTIC CURVES BY251 THRU BY255

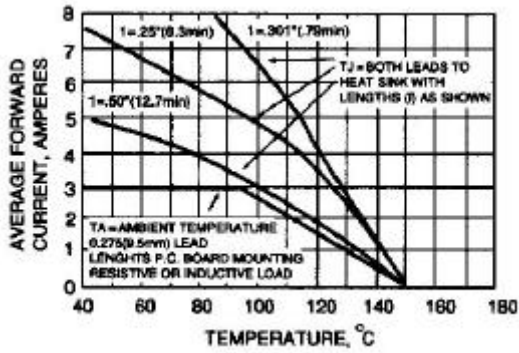


Fig. 1-FORWARD CURRENT DERATING CURVE

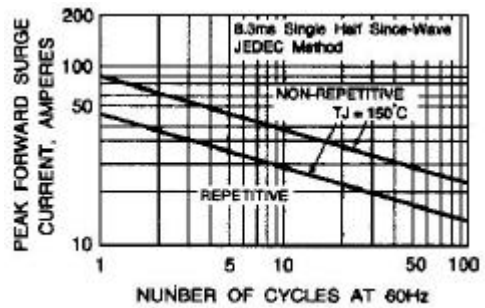


Fig. 2-MAXIMUM PEAK FORWARD SURGE CURRENT

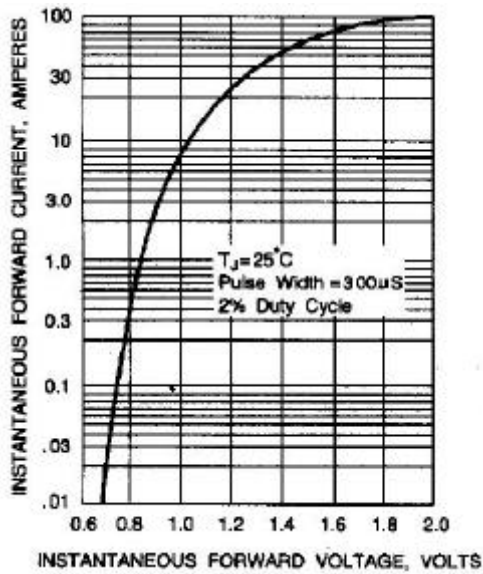


Fig. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

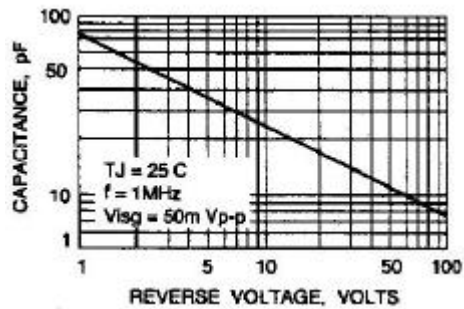


Fig. 4-TYPICAL JUNCTION CHARACTERISTICS

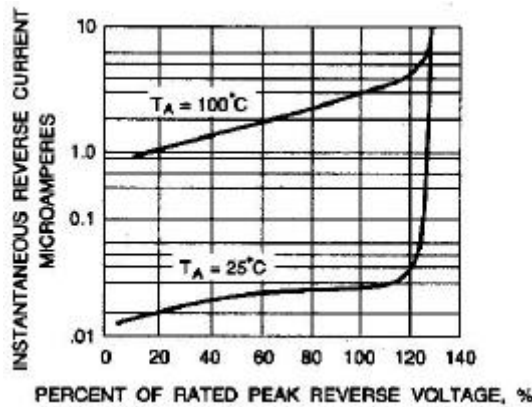


Fig. 5-TYPICAL REVERSE CHARACTERISTICS