











Bipolar Power Product Selection Guide

Efficient, Reliable and Green



Thyristors

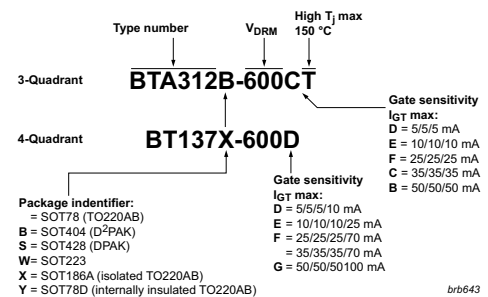
4-Quadrant Triacs

$I_{T(RMS)}$ (A)	V_{DRM} (V)	I_{GT} (max) (mA)	SOT54 (TO92)	SOT78 (TO220AB)	SOT78D (internally insulated TO220AB)	SOT82	SOT186A (isolated TO220AB)	SOT223	SOT404 (D ² PAK)	SOT428 (DPAK)
										
0.6	400	5/5/5/7	MAC97A6							
	600	5/5/5/7	MAC97A8							
	400 / 600	5/5/5/7	BT1306-D							
0.8	400 / 600	5/5/5/7	BT1308-D					BT1308W-D		
	600	5/5/5/7	Z00607MA							
1	600	3/3/3/7						BT131W		
	600 / 800	3/3/3/7	BT131							
	600 / 800	5/5/5/7	BT131-D							
	600 / 800	10/10/10/10	BT131-E							
	600 / 800	3/3/3/5	Z0103MA/NA					Z0103MN/NN		
	600 / 800	5/5/5/7	Z0107MA/NA					Z0107MN/NN		
	600 / 800	10/10/10/10	Z0109MA/NA					Z0109MN/NN		
	600 / 800	3/3/3/5	Z0103MA0/NA0**					Z0103MN0/NN0**		
	600 / 800	5/5/5/7	Z0107MA0/NA0**					Z0107MN0/NN0**		
	600 / 800	10/10/10/10	Z0109MA0/NA0**					Z0109MN0/NN0**		
4	600	5/5/5/10	BT132-D*							
	800	D/E/-/G				BT134				
	600	E/-				BT134				
	600	D/-		BT136			BT136X			BT136S
	600	F					BT136X			BT136S
	600 / 800	E		BT136			BT136X		BT136B	BT136S
	800	F								BT136S
6	800	-					BT136X			BT136S
	600	F/-/G					BT236X			
8	600	-/G					BT236X			
	600	D/-/G		BT137			BT137X			BT137S
	600	E		BT137			BT137X		BT137B	BT137S
	600	F					BT137X		BT137B	BT137S
	800	E		BT137			BT137X		BT137B	BT137S
	800	F						BT137B	BT137S	
	800	-		BT137			BT137X		BT137B	BT137S
	800	G						BT137B	BT137S	
12	600	D		BT138			BT138X			
	600	-/G		BT138			BT138X		BT138B	
	600	F					BT138X		BT138B	
	600 / 800	E		BT138	BT138Y		BT138X		BT138B	
	800	F					BT138X			
	800	-		BT138			BT138X			
16	800	G		BT138						
	600	E/-		BT139			BT139X		BT139B	
	600	F					BT139X		BT139B	
	600	G					BT139X		BT139B	
	800	E		BT139					BT139B	
	800	F							BT139B	
	800	-		BT139			BT139X		BT139B	
20	600	50/50/50/75							BT139B	
	800	G		BT139					BT139B	
25	400	50/50/50/75		MAC223A6			MAC223A8X			
	600 / 800	-		BTA140						

I_{GT} key:
D 5 mA (10 mA in 3+)
E 10 mA (25 mA in 3+)
F 25 mA (70 mA in 3+)
- 35 mA (70 mA in 3+)
G 50 mA (100 mA in 3+)

* Large chip / high I_{TSM}
** Enhanced immunity to false triggering








Triacs part numbering



Thyristors

3-Quadrant Triacs









types in **bold red** represent new products

$I_{T(RMS)}$ (A)	V_{DRM} (V)	I_{GT} (max) (mA)	SOT54 (TO92)	SOT78 (TO220AB)	SOT78D (internally insulated TO220AB)	SOT186A (isolated TO220AB)	SOT223	SOT404 (D ² PAK)	SOT428 (DPAK)
									
0.8	600 / 800	D/E	BTA2008						
1	600 / 800	B/E/ER	BTA201						
	600 / 800	E					BTA201W		
2	600 / 800	D/E							
	600	B/C/D/E/F		BTA204		BTA202X			BTA204S
	800	B/C/E		BTA204		BTA204X			BTA204S
4	1000	C				BTA204X			BTA204S
	600	B/D/E/F		BTA208		BTA208X			BTA208S
	800	B/E		BTA208		BTA208X			BTA208S
	800	F		BTA208		BTA208X			BTA208S
	1000	B				BTA208X			
	1000	C				BTA208X		BTA208B	
	1000	5 min - 35 max				BTA208X-1000C0			
12	600	D		BTA312		BTA312X		BTA312B	
	600	CT		BTA312				BTA312B	
	600 / 800	B/C/E		BTA312		BTA312X		BTA312B	
	600 / 800	C			BTA312Y				
	800	ET		BTA312				BTA312B	
16	600 / 800	B/C			BTA412Y				
	600	BT/D		BTA316					
	600 / 800	B/C/E		BTA316		BTA316X		BTA316B	
	600 / 800	ET		BTA316					
	800	10 min - 50 max				BTA316X-800B0			
25	600 / 800	B/C			BTA416Y				
	600	BT		BTA225					
	600 / 800	B		BTA225				BTA225B	

I_{GT} key:
D 5 mA (10 mA in 3+)
E 10 mA (25 mA in 3+)
F 25 mA (70 mA in 3+)
- 35 mA (70 mA in 3+)
G 50 mA (100 mA in 3+)

Silicon Controlled Rectifiers

types in **bold red** represent new products




$I_{T(RMS)}$ (A)	V_{DRM} & V_{RRM} (V)	I_{GT} (max) (mA)	SOT54 (TO92)	SOT78 (TO220AB)	SOT82	SOT186A (isolated TO220AB)	SOT223	SOT404 (D ² PAK)	SOT428 (DPAK)	SOT533 (IPAK)
										
0.8	400	0.012	EC103D1							
	400 (V_{DRM} only)	0.2	NXL0840							
	200 / 400 / 600	0.2	BT149B/D/G							
	200 / 400 / 600	0.2	BT169B/D/G							
	400	0.05	BT169D-L							
	800	0.1	BT169H							
	500 / 600	0.02 min - 0.2 max		BT168E/G						
1	200	0.2					MCR08BT1			
	600	0.02 min - 0.2 max					BT168GW			
	600	0.07 min - 0.45 max					BT168GWF**			
	600	0.2					BT148W-R*			
4	400 / 500 / 600	0.2			BT148-R					
	600	0.2							BT150S-R	
	500	0.2		BT150-R						
8	800	0.05							BT258S-LT	
	500 / 600 / 800	0.2		BT258-R		BT258X-R				
	600	0.2								BT258U-R
	800	0.2							BT258S-R	
12	600	5							BT300S-R	
	500 / 650	5		BT151-L					BT151S-L	
	500 / 650 / 800	15		BT151-R		BT151X-R			BT151S-R	
	650	15							BTH151S-R	
	500 / 650 / 800	15		BT151-C		BT151X-C				BT151U-C
20	500 / 1000	15		BT151-RT						
	400 / 600 / 800	32		BT152-R		BT152X-R		BT152B-R		
25	500	32		BT152-RT						
	800	35		BT145-R						

* Large chip / high I_{TSM}
** Hi-Com / fast turn-off
T: high T_{max} 150 °C

Thyristors

AC Thyristors



types in **bold red** represent new products

$I_{T(RMS)}$ (A)	V_{DRM} (V)	I_{GT} (max) (mA)	SOT54 (TO92)	SOT223	SO8
0.2	600	D			
0.8	600	D	ACT108	ACT108W	
	600	E	ACT108	ACT108W	

I_{GT} key:
D = 5 mA
E = 10 mA

AC Thyristor Triacs

types in **bold red italic underline** represent products in development

$I_{T(RMS)}$ (A)	V_{DRM} (V)	I_{GT} (max) (mA)	SOT186A	SOT428
2	800	E		
			<i>ACTT2X</i>	<i>ACTT2S</i>

I_{GT} key:
E = 10 mA

High Voltage Power Bipolar Transistors

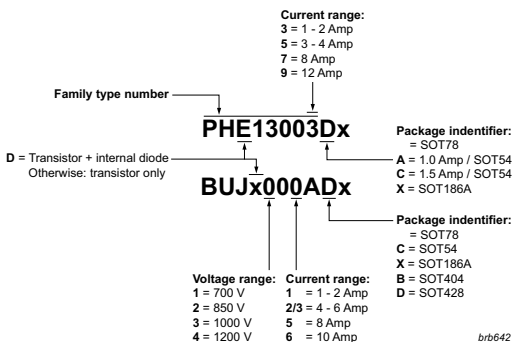
High Voltage Power Bipolar Transistors for lighting, SMPS and industrial applications

types in **bold red** represent new products

V_{CESM} (V)	$I_{C(DC)}$ (max) (A)	25 °C ind. t_f (typ) (ns)	@ I_C (A)	h_{FE} (typ)	@ I_C (A)	SOT54 (TO92)	SOT78 (TO220AB)	SOT186A (isolated TO220AB)	SOT404 (D ² PAK)	SOT428 (DPAK)
700	1	80	1	7.5	0.8	BUJ100LR				
	1	80	1	7.5	0.8	PHE13003A				
	1	50	1	14	0.75	BUJ100				
	1.5	100	0.5	9	1	PHE13003C				
	1.5	100	0.5	9	1	PHD13003C*				
	4	30	2	12.5	3		BUJ103A	BUJ103AX		BUJ103AD
	4	30	2	12.5	3					BUJD103AD*
	4	100	2	17	2			PHE13005		
	4	100	2	17	2			PHD13005*		
	8	20	5	11	4			BUJ105A		BUJ105AB
	8	20	5	11	4					BUJD105AD*
	8	40	5	9	5			PHE13007		
10	20	5	11	6			BUJ106A			
12	100	5	6 min - 30 max	8			PHE13009			
850	4	30	2	12.5	3		BUJD203A*	BUJD203AX*		BUJD203AD*
1000	5	145	2.5	12	3		BUJ303A	BUJ303AX		BUJ303AD
1050	4	520	2	41	0.8		BUJ302A	BUJ302AX		BUJ302AD
	5	200	2.5	10.5	3		BUJ303B			
1200	6	170	2.5	15.5	3		BUJ403A			

*Integrated freewheeling diode
Package drawings are not to scale





PHx/BUJx series part numbering



Power Diodes

Hyperfast power diodes









types in ***bold red italic underline*** represent products in development

V _{RRM} (V)	I _{F(AV)} (A)	V _F (typ) @ 150C (V)	@ I _F (A)	t _{rr} (typ) @ 25C (ns)	SOD59 (TO220AC)	SOD113 (2-pin SOT186A)	SOT78 (TO220AB)	SOT404 (D ² PAK)
								
600	5	1.4	5	19	BYC5-600	BYC5X-600		BYC5B-600
	8	1.4	8	19	BYC8-600	BYC8X-600		BYC8B-600
	8	1.4	8	19	<i>BYC8D-600</i>	<i>BYC8DX-600</i>		
	8	2	8	12.5		BYC58X-600		
	10	1.4	10	19	BYC10-600	BYC10X-600		BYC10B-600
	2 x 5	1.4	5	19			BYC10-600CT	
	15	1.4	15	19	BYC15-600	BYC15X-600		
20	1.4	20	19	BYC20-600	BYC20X-600			

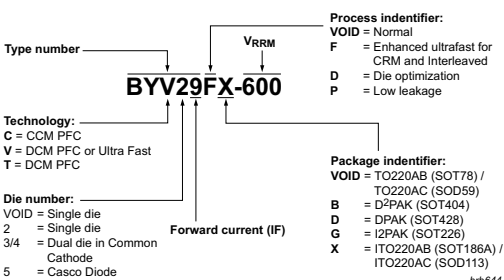
Power Diodes

Ultrafast power diodes

types in ***bold red*** represent new products

V _{RRM} (V)	I _{F(AV)} (A)	V _F (typ) @ 150C (V)	@ I _F (A)	t _{rr} (typ) @ 25C (ns)	SOD59 (TO220AC)	SOD113 (2-pin SOT186A)	SOT78 (TO220AB)	SOT186A (isolated TO220AB)	SOT223	SOT226 (I ² PAK)	SOT404 (D ² PAK)	SOT428 (DPAK)
												
100	8	0.8	8	20	BYW29E-100							
	2 x 10	0.72	8	20			BYV32E-100					
150	2 x 0.75	0.5	0.5	10					BYV40E-150			
	8	0.8	8	20	BYW29E-150							
	2 x 10	0.72	8	20			BYV32E-150					
200	2 x 15	0.78	15	20			BYV42E-150					
	8	0.8	8	20	BYW29E-200	BYW29EX-200						BYW29ED-200
	2 x 5	0.8	5	15			BYQ28E-200	BYQ28X-200				BYQ28ED-200
	14	0.83	14	20	BYV79E-200							
	2 x 8	0.84	8	20			BYQ30E-200					
	2 x 10	0.72	8	20			BYV32E-200					
300	2 x 15	0.78	15	20			BYV42E-200			<i>BYV32G-200</i>	BYV32EB-200	
	2 x 5	0.95	5	50			BYT28-300			<i>BYV42G-200</i>	BYV42EB-200	
400	9	0.9	8	50	BYV29-400							
	2 x 10	0.87	10	50			BYV34-400					
500	9	0.9	8	50	BYV29-500	BYV29X-500					BYV29B-500	
	2 x 5	0.95	5	50			BYT28-500					
	15	0.9	15	50	BYT79-500							
	2 x 10	0.87	10	50			BYV34-500					
600	2 x 15	0.95	15	50			BYV44-500					
	5	0.97	5	50		BYV25X-600				BYV25G-600		BYV25D-600
	8	1.07	8	60	BYR29-600	BYR29X-600						
	9	0.97	8	50	BYV29-600	BYV29X-600				BYV29G-600	BYV29B-600	
	15	1	15	50	BYT79-600	BYT79X-600						
	2 x 10	0.92	10	50			BYV34-600	BYV34X-600		BYV34G-600		
	5	1.1	5	17.5	<i>BYV25F-600</i>	<i>BYV25FX-600</i>	BYV25F-600				BYV25FB-600	<i>BYV25FD-600</i>
800	9	1.25	8	17.5	<i>BYV29F-600</i>	BYV29FX-600	BYV29F-600				BYV29FB-600	<i>BYV29FD-600</i>
	2 x 10	1.3	10	20			BYV410-600	BYV410X-600				
	8	1.07	8	60	BYR29-800	BYR29X-800						

Power Diode part numbering





www.nxp.com

© 2011 NXP Semiconductors N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: March 2011

Document order number: 9397 750 17064

Printed in the Netherlands