


- FEATURES**
- PEAK PULSE POWER : 400 W (10/1000μs)
 - STAND-OFF VOLTAGE RANGE :
From 5.8V to 376 V
 - UNI AND BIDIRECTIONAL TYPES
 - LOW CLAMPING FACTOR
 - FAST RESPONSE TIME
 - UL RECOGNIZED

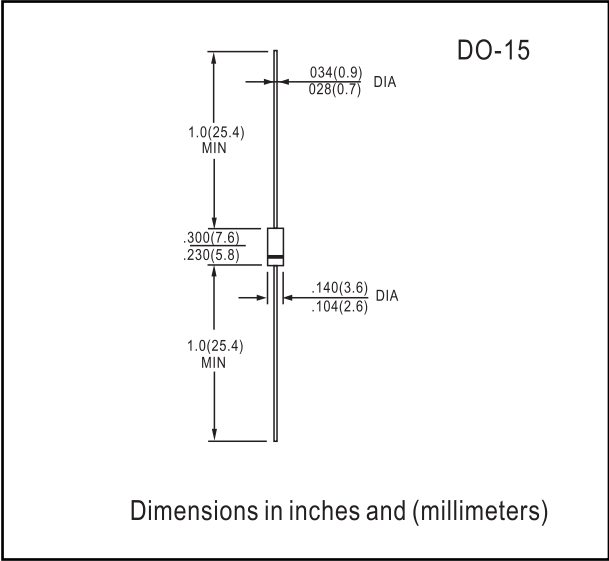

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATINGS ($T_{amb} = 25^{\circ}C$)

Symbol	Parameter	Value	Unit
P_{PP}	Peak pulse power dissipation (see note 1)	$T_j \text{ initial} = T_{amb}$	600 W
P	Power dissipation on infinite heatsink	$T_{amb} = 75^{\circ}C$	1.7 W
I_{FSM}	Non repetitive surge peak forward current for unidirectional types	$t_p = 10ms$ $T_j \text{ initial} = T_{amb}$	100 A
T_{stg} T_j	Storage temperature range Maximum junction temperature	- 65 to + 175 175	$^{\circ}C$ $^{\circ}C$
T_L	Maximum lead temperature for soldering during 10s a 5mm from case.	230	$^{\circ}C$

Note 1 : For a surge greater than the maximum values, the diode will fail in short-circuit.

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction to leads	60	$^{\circ}C/W$
$R_{th(j-a)}$	Junction to ambient on printed circuit. $L_{lead} = 10 \text{ mm}$	100	$^{\circ}C/W$




ELECTRICAL CHARACTERISTICS

T_j = 25 °C unless otherwise specified.

Types		I _{RM} @ V _{RM}		V _{BR} @ I _R		V _{CL} @ I _P		V _{CL} @ I _{PP}		αT	C
		max		min		max		max		max	typ
				note2		10/1000μs		8/20μs		note3	note4
Unidirectional	Bidirectional	μA	V	V	mA	V	A	V	A	10 ⁻⁴ /°C	pF
BZW06-5V8	BZW06-5V8B	1000	5.8	6.45	10	10.5	38.0	13.4	174	5.7	3500
BZW06-6V4	BZW06-6V4B	500	6.4	7.13	10	11.3	35.4	14.5	160	6.1	3100
BZW06-8V5	BZW06-8V5B	10	8.5	9.5	1	14.5	27.6	18.6	124	7.3	2000
BZW06-10	BZW06-10B	5	10.2	11.4	1	16.7	24.0	21.7	106	7.8	1550
BZW06-13	BZW06-13B	5	12.8	14.3	1	21.2	19.0	27.2	85	8.4	1200
BZW06-15	BZW06-15B	1	15.3	17.1	1	25.2	16.0	32.5	71	8.8	975
BZW06-19	BZW06-19B	1	18.8	20.9	1	30.6	13.0	39.3	59	9.2	800
BZW06-20	BZW06-20B	1	20.5	22.8	1	33.2	12.0	42.8	54	9.4	725
BZW06-23	BZW06-23B	1	23.1	25.7	1	37.5	10.7	48.3	48	9.6	625
BZW06-26	BZW06-26B	1	25.6	28.5	1	41.5	9.6	53.5	43	9.7	575
BZW06-28	BZW06-28B	1	28.2	31.4	1	45.7	8.8	59.0	39	9.8	510
BZW06-31	BZW06-31B	1	30.8	34.2	1	49.9	8.0	64.3	36	9.6	480
BZW06-33	BZW06-33B	1	33.3	37.1	1	53.9	7.4	69.7	33	10.0	450
BZW06-40	BZW06-40B	1	40.2	44.7	1	64.8	6.2	84	27	10.1	370
BZW06-48	BZW06-48B	1	47.8	53.2	1	77.0	5.2	100	23	10.3	320
BZW06-58	BZW06-58B	1	58.1	64.6	1	92.0	4.3	121	19	10.4	270
BZW06-70	BZW06-70B	1	70.1	77.9	1	113	3.5	146	16.0	10.5	230
BZW06-85	BZW06-85B	1	85.5	95.0	1	137	2.9	178	13.0	10.6	200
BZW06-102	BZW06-102B	1	102	114	1	165	2.4	212	11.0	10.7	170
BZW06-128	BZW06-128B	1	128	143	1	207	2.0	265	9.0	10.8	145
BZW06-154	BZW06-154B	1	154	171	1	246	1.6	317	7.0	10.8	125
BZW06-171	BZW06-171B	1	171	190	1	274	1.5	353	6.5	10.8	120
BZW06-188	BZW06-188B	1	188	209	1	328	1.4	388	6.0	10.8	110
BZW06-213	BZW06-213B	1	231	237	1	344	1.5	442	5.2	11.0	100
BZW06-256	BZW06-256B	1	256	285	1	414	1.2	529	4.3	11.0	90
BZW06-273	BZW06-273B	1	273	304	1	438	1.2	564	4.0	11.0	85
BZW06-299	BZW06-299B	1	299	332	1	482	0.8	618	3.7	11.0	80
BZW06-342	BZW06-342B	1	342	380	1	548	0.9	706	3.2	11.0	75
BZW06-376	BZW06-376B	1	376	418	1	603	0.8	776	3.0	11.0	70

RATINGS AND CHARACTERISTIC CURVES BYW06 series

Fig. 1a : Capacitance versus reverse applied voltage for unidirectional types (typical values).

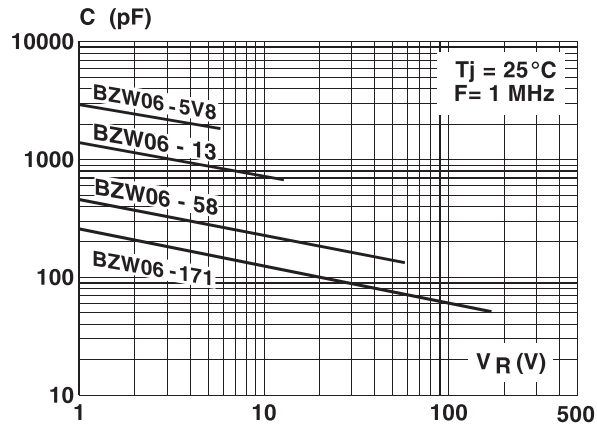

Capacitance versus reverse applied voltage for bidirectional types (typical values).

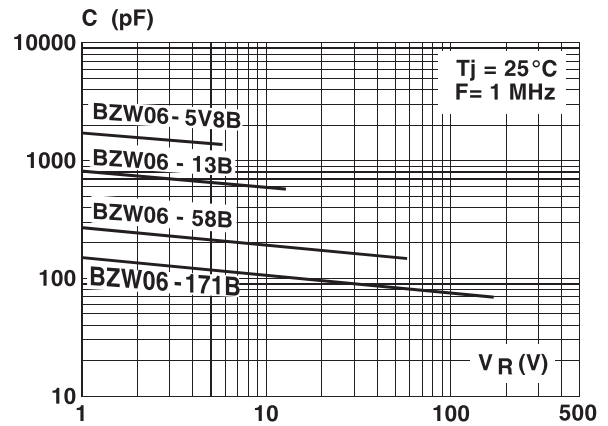


Fig. 2: Peak forward voltage drop versus peak forward current (typical values for unidirectional types).

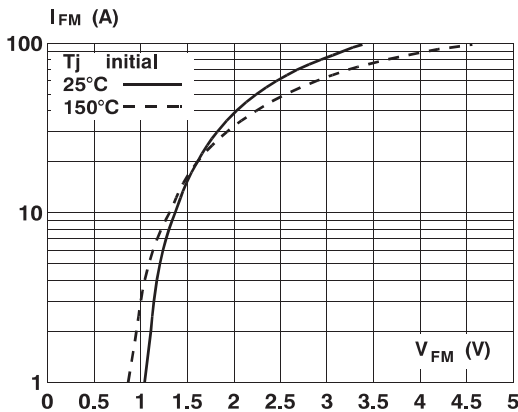


Fig. 3: Transient thermal impedance junction ambient versus pulse duration (For FR4 PC Board with L lead = 10mm).

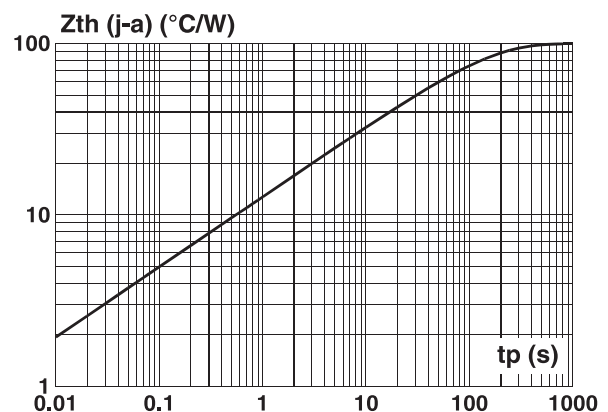


Fig. 4: Relative variation of leakage current versus junction temperature.

