

## Features

- DC to 4 GHz
- Terminal for lead attachment
- Low VSWR
- Aluminum Nitride ceramic

## Applications

- Drop in isolators
- RF amplifiers

# CHF1206CNT Series 20 W Power RF Chip Termination


### General Specifications

Substrate .....ALN  
 Resistive Film .....Thick Film  
 Resistance .....50 Ω  
 Tolerance .....±5 %  
 Packaging .....100 pcs./bag

### Absolute Ratings


Power .....20 W  
 Frequency .....DC-4 GHz  
 VSWR .....1.25 Maximum

### Product Dimensions

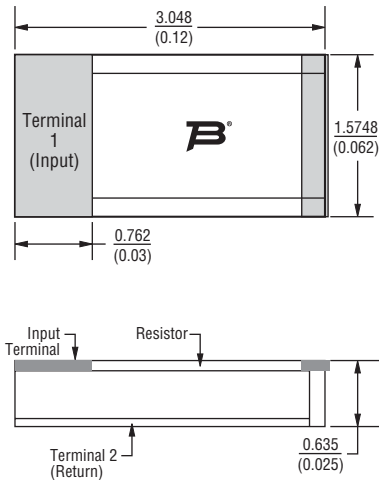

DIMENSIONS =  $\frac{\text{MILLIMETERS}}{\text{(INCHES)}}$

### Characteristic Curve

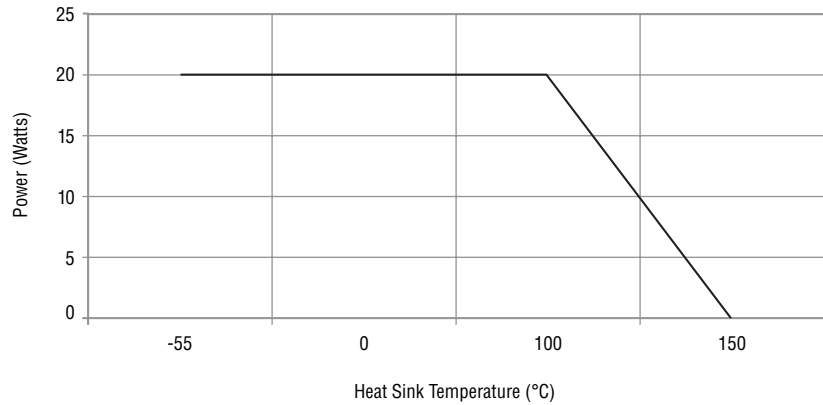

### How to Order

**CHF 1206 C N T 500 L W**

Model \_\_\_\_\_

Size \_\_\_\_\_

Version \_\_\_\_\_

Substrate \_\_\_\_\_

Mount \_\_\_\_\_  
 T = Tab

Value \_\_\_\_\_  
 500 = 50 Ohms

Function \_\_\_\_\_  
 L = Termination

Finish \_\_\_\_\_  
 W = Sn  
 X = Ni Au



#### Asia-Pacific:

Tel: +886-2 2562-4117  
 Fax: +886-2 2562-4116

#### Europe:

Tel: +41-41 768 5555  
 Fax: +41-41 768 5510

#### The Americas:

Tel: +1-951 781-5500  
 Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)