



MODEL NUMBER DA0717

Schottky Diode 7 Section Attenuator


FEATURES

- 30-200 MHz
- 25 nSec Switching Speed
- 0.5 dB LSB, 63.5 dB Range
- TTL Control
- See DA0617 for 38 Pin DIP Version
- See 100C1757 for Connectorized Version

7 BIT

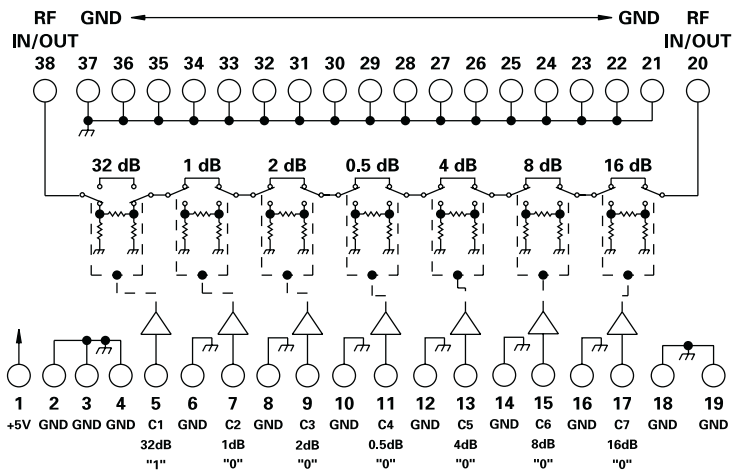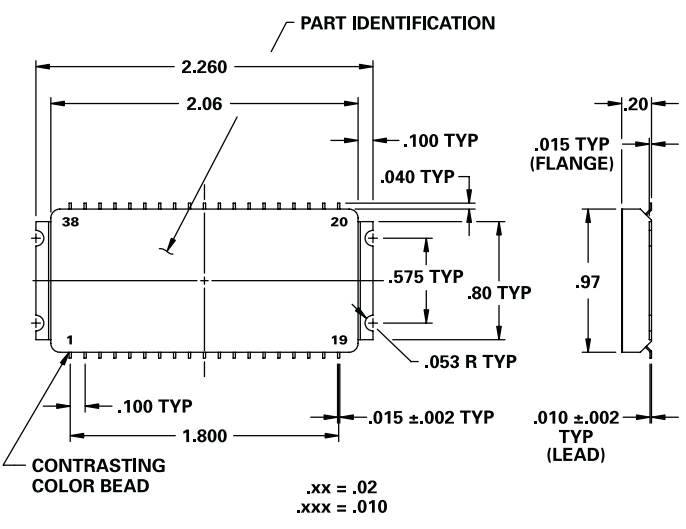

GUARANTEED PERFORMANCE

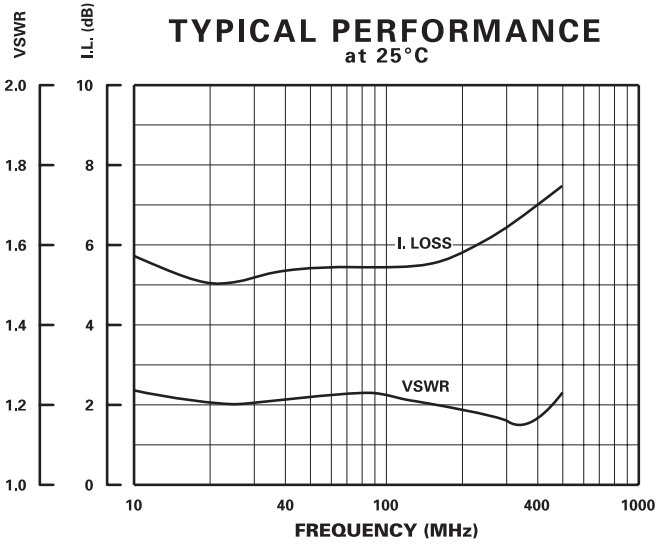

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	30		200	MHz	
DC Current		400	640	mA	At +5 VDC Supply
Control Type		TTL			7 Line Logic "0" = Thru Logic "1" = Attenuation
Control Current	High Low	0 -0.06	.025 -0.20	mA	V _{IH} = +2.7 V V _{IL} = +0.5 V
Insertion Loss		5.8	7.0	dB	30 - 150 MHz 150 - 250 MHz
Attenuation	LSB Range Accuracy	0	0.5	dB	63.5 dB 0.5 dB ±0.15 dB; 1 dB to 63.5 dB ±(0.2 dB ±3% of Atten. Setting in dB, 50 - 150 MHz) ±(0.2 dB ±5% of Atten. Setting in dB, 30 - 200 MHz)
VSWR		1.22/1 1.19/1	1.35/1 1.35/1		30 - 150 MHz 30 - 250 MHz
Impedance		50		OHMS	
Switching Speed		25	35	nSec	50% TTL to 90% / 10% RF
Transition (Rise/Fall) Time		7		nSec	90% / 10% or 10% / 90% RF
Switching (Video) Transients		50	150	mV	Peak Value
Intercept Points	2nd 3rd	+82 +34		dBm	
RF Power	Operate No Damage	+13	+10 +20	dBm	0.1 dB Compression
Operating Temperature		-54	+25	+85	°C TA