



DB101 - DB107

SINGLE-PHASE SILICON BRIDGE RECTIFIER



VOLTAGE RANGE - 50 to 1000 Volts CURRENT - 1.0 Ampere

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Symbols molded or marked on body
- * Mounting position: Any
- * Weight: 0.4 gram

FEATURES

- * Good for automation insertion
- * Surge overload rating - 50 Amperes peak
- * Ideal for printed circuit board
- * Reliable low cost construction
- * Glass passivated junction

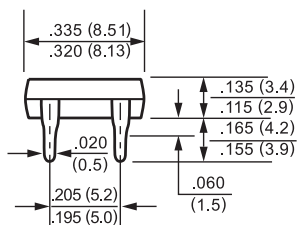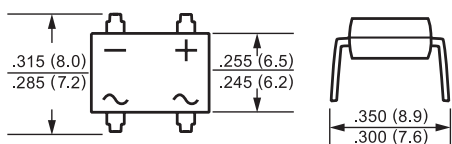

Dimensions in inches and (millimeters)

DB-1



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| PARAMETER | SYMBOL | DB101 | DB102 | DB103 | DB104 | DB105 | DB106 | DB107 | UNITS |
|---|--------------|-------------|-------|-------|-------|-------|-------|-------|---------------------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS Bridge Input Voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum Average Forward Output Current at $T_A = 40^\circ\text{C}$ | I_O | 1.0 | | | | | | | Amps |
| Peak Forward Surge Current 8.3 ms single half sine-wave Superimposed on rated load (JEDEC Method) | I_{FSM} | 50 | | | | | | | Amps |
| Maximum Forward Voltage Drop per element at 1.0A DC | V_F | 1.1 | | | | | | | Volts |
| Maximum DC Reverse Current at Rated | I_R | 10 | | | | | | | uAmps |
| DC Blocking Voltage per element | | 500 | | | | | | | |
| I^2t Rating For Fusing ($t < 8.3\text{ms}$) | I^2t | 10 | | | | | | | A^2Sec |
| Typical Junction Capacitance (Note 1) | C_J | 25 | | | | | | | pF |
| Typical Thermal Resistance (Note 2) | $ROJA$ | 40 | | | | | | | $^\circ\text{C}/\text{W}$ |
| Operating and Storage Temperature Range | $T_{J,TSTG}$ | -65 to +150 | | | | | | | $^\circ\text{C}$ |

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts

2. Thermal Resistance from Junction to Ambient and from junction to lead mounted on P.C.B. with 0.5 x 0.5" (13x13mm) copper pads.

Wing Shing Computer Components Co., (H.K.)Ltd.
 Homepage: <http://www.wingshing.com>

Tel:(852)2341 9276 Fax:(852)2797 8153
 E-mail: wsccltd@hkstar.com



DB101 - DB107

RATING AND CHARACTERISTIC CURVES

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

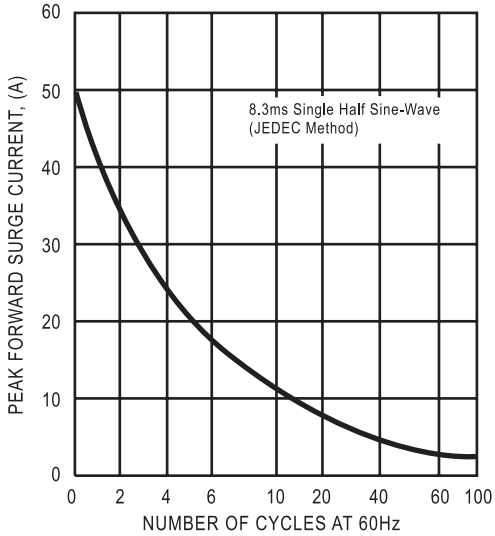


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

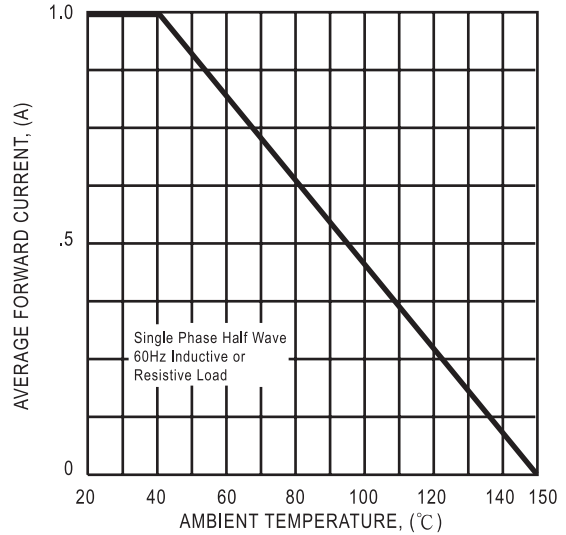


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

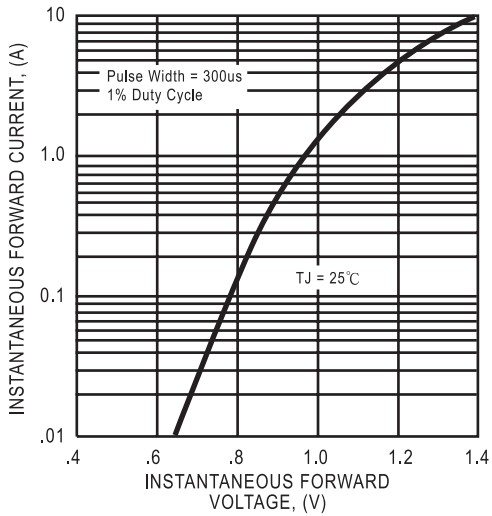


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

