

# WILLAS

**DB101S  
THRU  
DB107S**

**SINGLE-PHASE GLASS PASSIVATED  
SILICON SURFACE MOUNT BRIDGE RECTIFIER  
VOLTAGE RANGE 50 to 1000 Volts CURRENT 1.0 Ampere**

### FEATURES

- \* Surge overload rating - 50 amperes peak
- \* Ideal for printed circuit board
- \* Reliable low cost construction utilizing molded
- \* Glass passivated device
- \* Polarity symbols molded on body
- \* Mounting position: Any
- \* Weight: 0.378 grams
- \* RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"

### MECHANICAL DATA



- \* Epoxy : Device has UL flammability classification 94V-0
- \* UL listed the recognized component directory, file #E195711

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



DBS

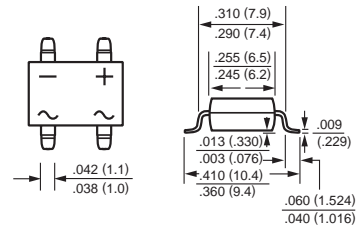

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	DB101S	DB102S	DB103S	DB104S	DB105S	DB106S	DB107S	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Current at TA = 40°C	I <sub>O</sub>	1							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	40							Amps
Rating for fusing (t < 8.3ms)	I <sup>2</sup> t	6.6							A <sup>2</sup> S
Typical Thermal Resistance (Note 2)	R θ <sub>JA</sub>	40							°C/W
	R θ <sub>JL</sub>	15							
	R θ <sub>JC</sub>	10							
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to + 150							°C

### ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	DB101S	DB102S	DB103S	DB104S	DB105S	DB106S	DB107S	UNITS
Element at 1.0A DC Maximum Forward Voltage Drop per Bridge	V <sub>F</sub>	1.1							Volts
Maximum Reverse Current at rated DC Blocking Voltage per element	@TA = 25°C	5							uAmps
	@TA = 125°C	0.5							mAmps

NOTE: 1.Suffix "-s" Surface Mount for Dip Bridge.

2.Units mounted on P.C.B.with 0.5x0.5" (13x13mm) copper pads.

# RATING AND CHARACTERISTIC CURVES ( DB101S THRU DB107S )

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

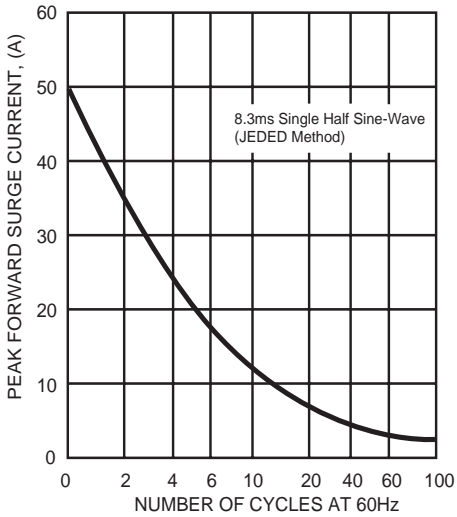


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

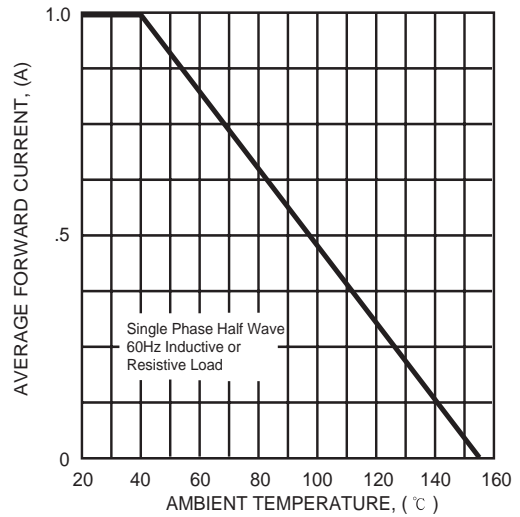


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

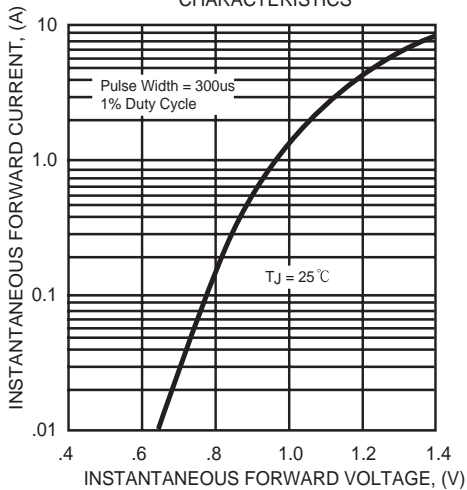


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

