

DB151S(DF15005S) THRU DB157S(DF1510S)



星合电子
XINGHE ELECTRONICS

SURFACE MOUNT
GLASS PASSIVATED BRIDGE RECTIFIER
Reverse Voltage: 50 to 1000 Volts
Forward Current: 1.0 Amps


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- Rating to 1000V PRV
- Ideal for printed circuit board
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals

MECHANICAL DATA

- Case: DBS molded plastic body
- Epoxy: UL94V-0 rate flame retardant
- Terminals: Plated leads solderable per MIL-STD-750, method 2026
- Mounting Position: Any
- Weight: 0.02ounce, 0.38 gram

DBS

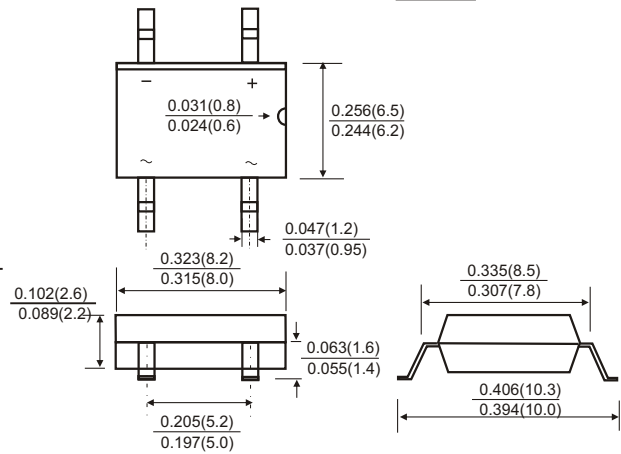

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

		Symbols	DB151S DF 15005S	DB152S DF 1501S	DB153S DF 1502S	DB154S DF 1504S	DB155S DF 1506S	DB156S DF 1508S	DB157S DF 1510S	Units
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current		I(AV)	1.5						Amp	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	50						Amps	
Maximum Instantaneous Forward Voltage at 1.5A DC		V _F	1.1						Volts	
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25 °C	I _R	10						μA	
	T _A =125 °C		500							
Typical junction capacitance(Note 1)		C _J	25						pF	
Typical thermal resistance(Note 2)		R _{θJA}	40						K/W	
Operating junction and storage temperature range		T _J T _{STG}	-55 to +150						°C	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0 Volts.

2. Thermal resistance junction to ambient mounted on P.C.B. With 05*0.5 inches(1.3*1.3mm) copper pads

DB151S(DF15005S) THRU DB157S(DF1510S)



星合电子
XINGHE ELECTRONICS

**SURFACE MOUNT
GLASS PASSIVATED BRIDGE RECTIFIER**
Reverse Voltage: 50 to 1000 Volts
Forward Current: 1.0 Amps

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

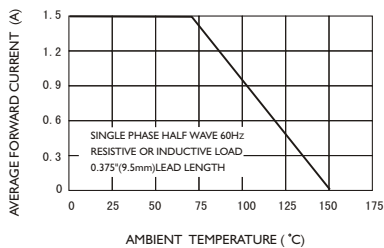


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

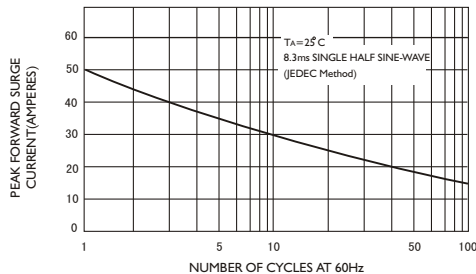


FIG3-TYPICAL JUNCTION CAPACITANCE

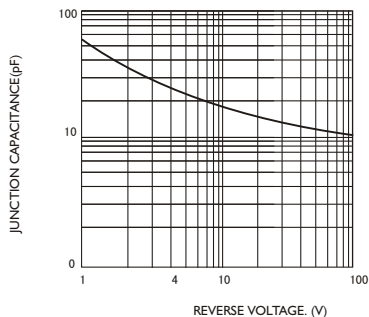


FIG4-TYPICAL FORWARD CHARACTERISTICS

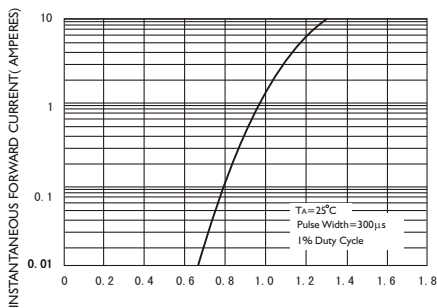


FIG.5-TYPICAL REVERSE CHARACTERISTICS

