

FEATURES


- Capsule type metal-ceramic package with precious metal pressure contacts
- Medium voltage, high current rectifier diode with slim package for lowest thermal resistance
- Low power dissipation
- Especially suited for water cooling
- Forward selections for paralleling available

TYPICAL APPLICATIONS

- Welders
- Plating rectifiers

TECHNICAL DATA

DEVICE TYPE	V _{RRM} (V)	V _{RSM} (V)
DS6000SK0404	400	500
DS6000SK0606	600	700

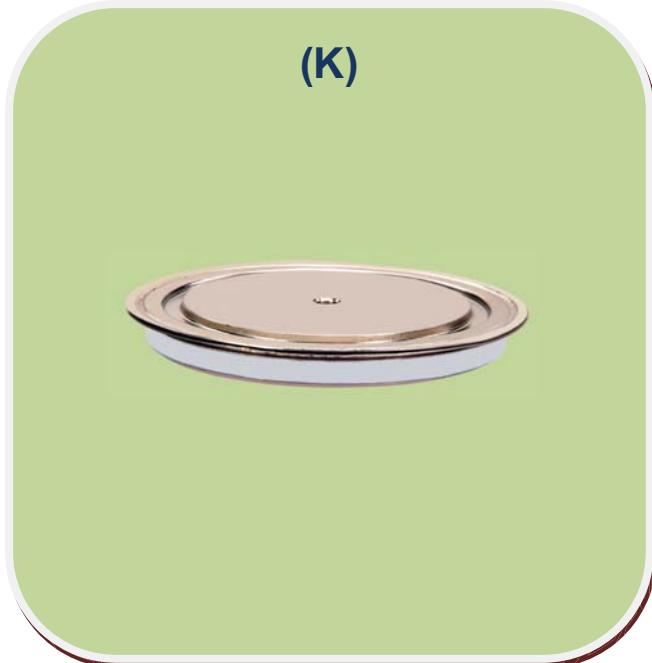

SYMBOL	CONDITIONS	VALUES
I _{F(AV)}	Maximum average forward Current TC = 85 °C	6000 A
V _{FM}	Maximum peak forward Voltage drop @ 14000 AP	1.30 V
I _{FSM}	Maximum peak one cycle (non-rep.) surge current 10 msec	60000 A
I ² t	Max. I ² t rating (non-rep.) for 10 msec	18000000 A ² Sec
I _{RRM}	Peak reverse current at T _{vj} = 175°C	100 mA
V ₀ R ₀	T _{vj} =max T _{vj} =max	0.70 V 0.04 mΩ
R _{th(j-c)} R _{th(c-h)} T _{vj} T _{stg}	DSC/SSC DSC/SSC Junction temperature Storage temperature	0.012/0.024°C/W 0.005/0.01 °C/W 180 °C 150 °C
Mounting force		30Nm
Weight	Approx.	130 gms
Package Outline		k

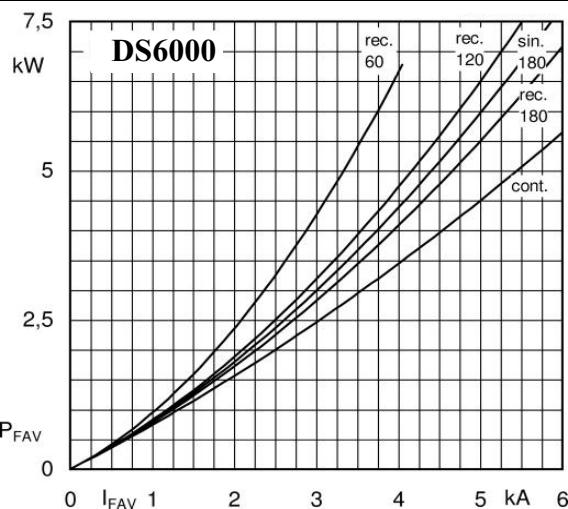


Fig. 1L Power dissipation vs. forward current

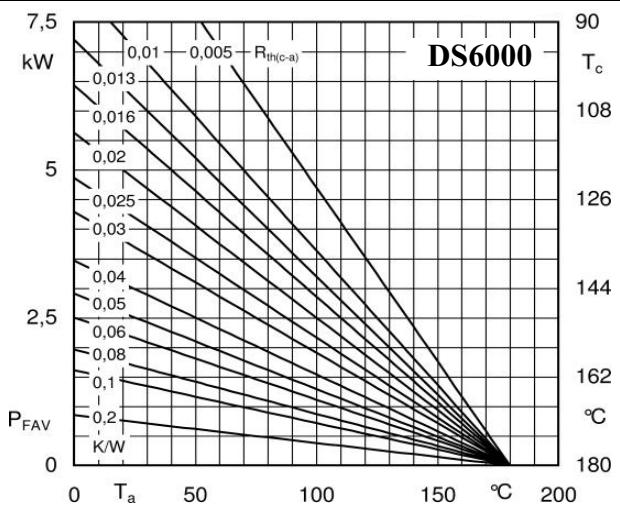


Fig. 1R Power dissipation vs. ambient temperature

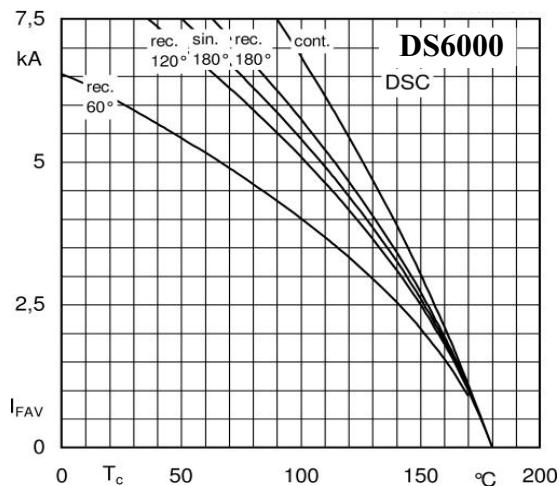


Fig. 2 Forward current vs. case temperature

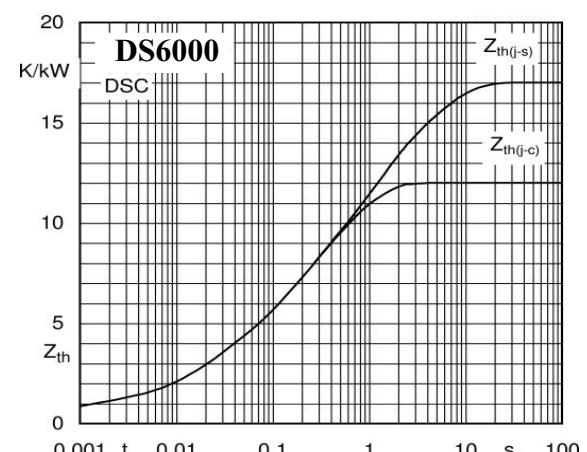


Fig. 4a Transient thermal impedance (double sided cooling)

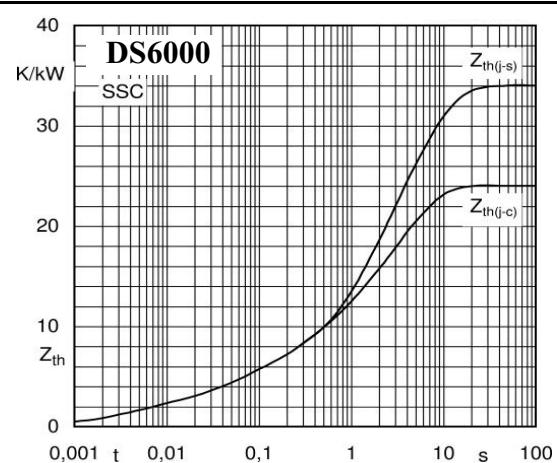


Fig. 4b Transient thermal impedance (single sided cooling)

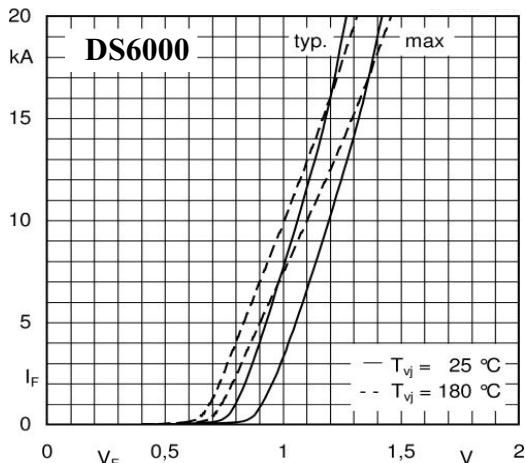


Fig. 5 Forward characteristics

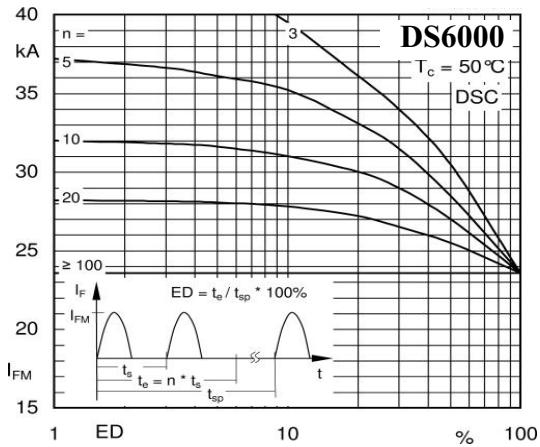


Fig. 10a Peak forward current vs. duty cycle ($T_c = 50\text{ }^{\circ}\text{C}$)

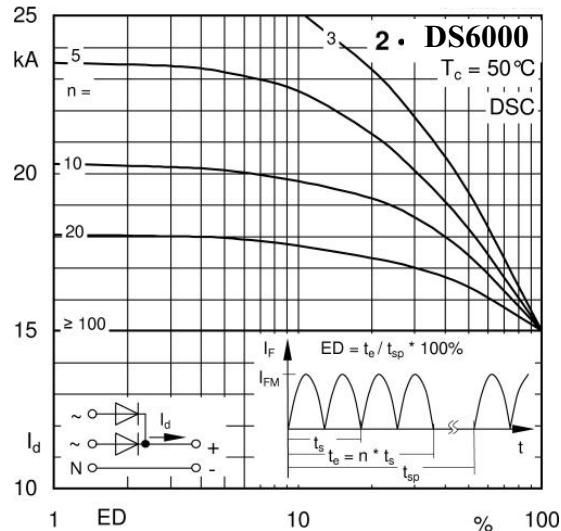


Fig. 11a Direct output current vs. duty cycle ($T_c = 50\text{ }^{\circ}\text{C}$)

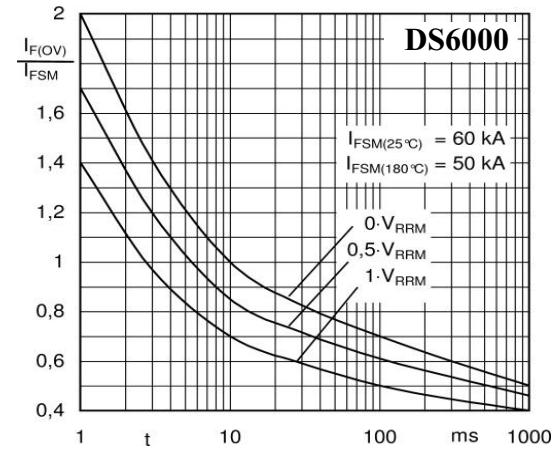


Fig. 6 Surge overload current vs. time

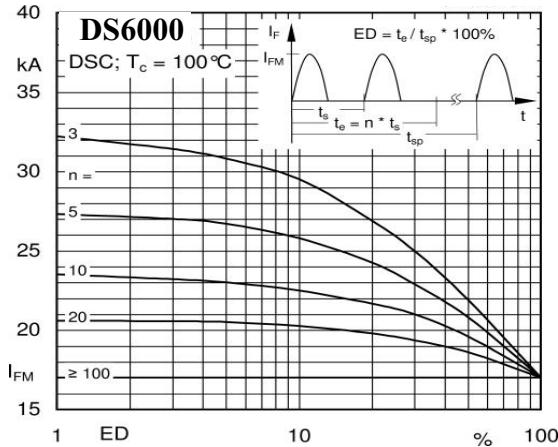


Fig. 10b Peak forward current vs. duty cycle ($T_c = 100\text{ }^{\circ}\text{C}$)


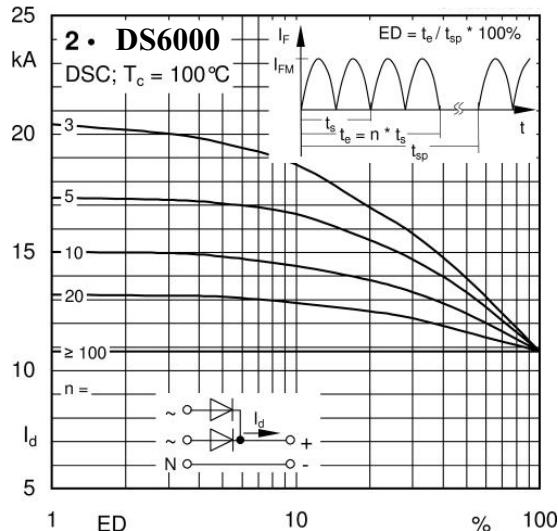


Fig. 11b Direct output current vs. duty cycle ($T_c = 100\text{ }^{\circ}\text{C}$)

PACKAGE OUTLINE

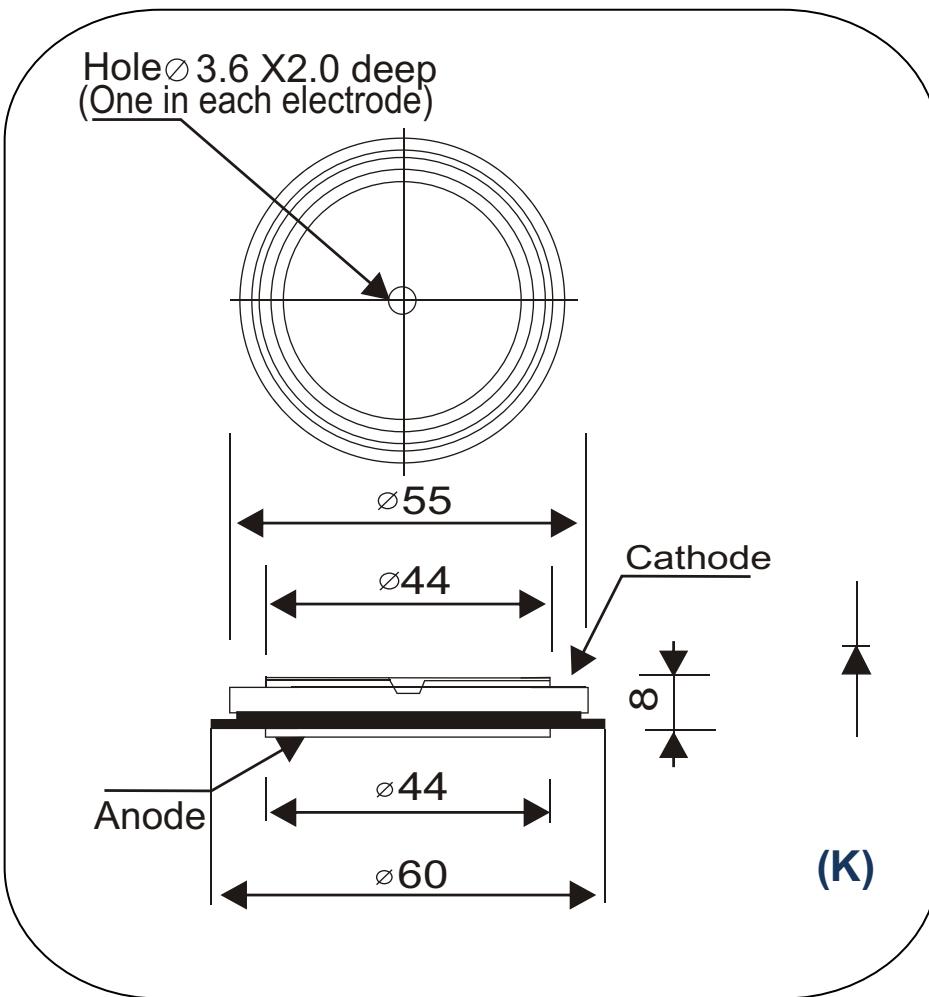

All dimensions are in mm.

Insel Rectifiers (India) Pvt. Ltd.

(An ISO 9001:2015, ISO 14001:2015 Certified Company)

Plot No 151, Udyog Kendra, Extn.-II, Ecotech-III, Greater Noida-201306

Toll Free No.: 1800 3070 9989, Fax : 011-27491404

E-mail : insel@rectifierindia.com, sales@rectifierindia.com