


Digital Transistor

DTC(R₁≠R₂ SERIES)CA

FEATURES

- Epitaxial planar die construction.
- Complementary PNP types available(DTA).
- Built-in biasing resistors, R₁≠R₂
- Also available in lead free version.

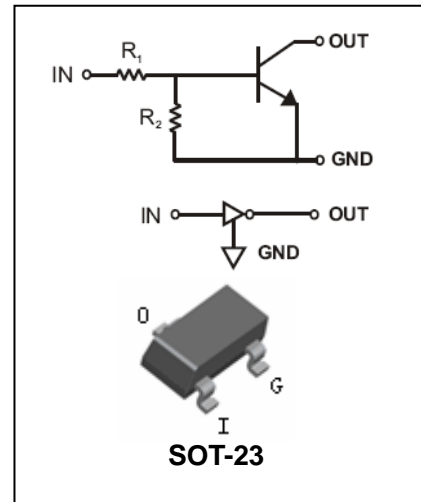

APPLICATIONS

- The NPN style digital transistor.

ORDERING INFORMATION

Type No.	Marking	Package Code
DTC113ZCA	E21	SOT-23
DTC114WCA	84	SOT-23
DTC114YCA	64	SOT-23
DTC123JCA	E42	SOT-23
DTC123YCA	62	SOT-23
DTC143XCA	43●	SOT-23
DTC143ZCA	E23	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
V _{CC}	Supply Voltage	50	V
V _{IN}	Input Voltage	DTC113ZCA	-5 to+10
		DTC114WCA	-10 to+30
		DTC114YCA	-6 to +40
		DTC123JCA	-5 to+12
		DTC123YCA	-5 to+12
		DTC143XCA	-7 to+20
		DTC143ZCA	-5 to+30
I _o	Output Current	DTC113ZCA	100
		DTC114WCA	100
		DTC114YCA	70
		DTC123JCA	100
		DTC123YCA	100
		DTC143XCA	100
		DTC143ZCA	100
I _C (Max.)	Output current	ALL	100
P _D	Power Dissipation		200

Digital Transistor

DTC(R₁≠R₂ SERIES)CA

Symbol	Parameter	Value	Units
R _{θJA}	Thermal Resistance, Junction to Ambient Air	625	°C/W
T _j , T _{stg}	Operating and Storage and Temperature Range	-55 to +150	°C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified





Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Input Voltage	DTC113ZCA	V _{I(off)} V _{CC} =5V, I _O =100μA	0.3			V
	DTC114WCA		0.8			
	DTC114YCA		0.3			
	DTC123JCA		0.5	-	-	
	DTC123YCA		0.3			
	DTC143XCA		0.3			
	DTC143ZCA		0.5			
Input Voltage	DTC113ZCA	V _{I(on)} V _O =0.3V, I _O =20mA V _O =0.3V, I _O =2mA V _O =0.3V, I _O =1mA V _O =0.3V, I _O =5mA V _O =0.3V, I _O =20mA V _O =0.3V, I _O =20mA V _O =0.3V, I _O =5mA			3.0	V
	DTC114WCA				3.0	
	DTC114YCA				1.4	
	DTC123JCA		-	-	1.1	
	DTC123YCA				3.0	
	DTC143XCA				2.5	
	DTC143ZCA				1.3	
Output Voltage	DTC123JCA DTC143ZCA DTC114YCA ALL Others	V _{O(on)} I _O /I _I =5mA/0.25mA I _O /I _I =10mA/0.5mA	-	0.1	0.3	V
Input Current	DTC113ZCA	I _I V _I =5V			7.2	mA
	DTC114WCA				0.88	
	DTC114YCA				0.88	
	DTC123JCA				3.6	
	DTC123YCA				3.8	
	DTC143XCA				1.8	
	DTC143ZCA				1.8	
Output Current	I _{O(off)}	V _{CC} =50V, V _I =0V	-	-	0.5	μA
DC Current Gain	DTC113ZCA	G _I V _O =5V, I _O =10mA	33			
	DTC114WCA		24			
	DTC114YCA		68			
	DTC123JCA		80	-	-	
	DTC123YCA		33			
	DTC143XCA		30			
	DTC143ZCA		80			

Digital Transistor

DTC(R₁≠R₂ SERIES)CA

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Input Resistor DTC113ZCA DTC114WCA DTC114YCA DTC123JCA DTC123YCA DTC143XCA DTC143ZCA	R ₁ (R ₂)			1(10) 10(4.7) 10(47) 2.2(47) 2.2(10) 4.7(10) 4.7(47)		kΩ
Input Resistor (R ₁) Tolerance	ΔR ₁	-	-30		+30	%
Resistance Ratio Tolerance	ΔR ₂ /R ₁	-	-20		+20	%
Gain-Bandwidth Product	f _T	V _{CE} =10V, I _E =5mA, f=100MHz	-	250	-	MHz

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

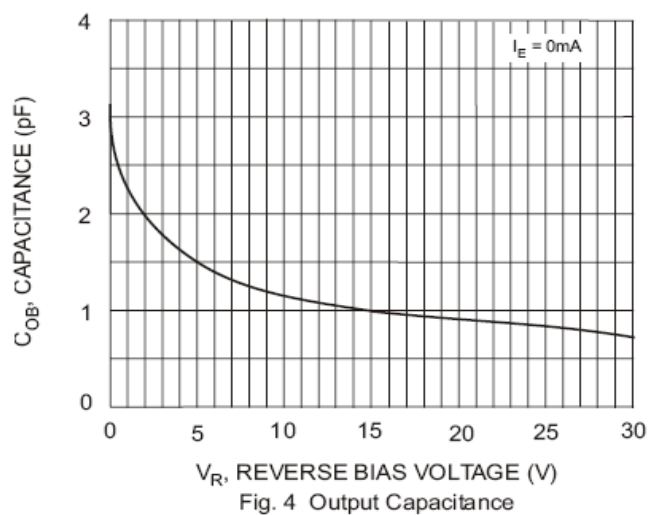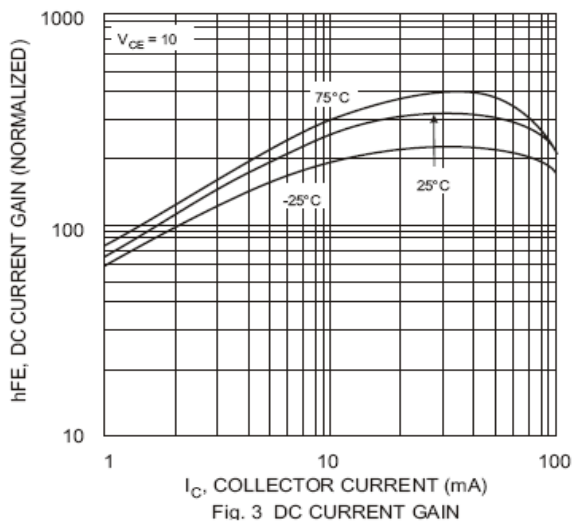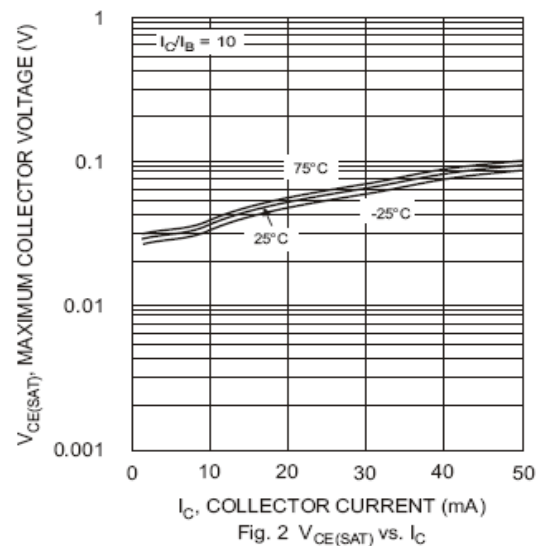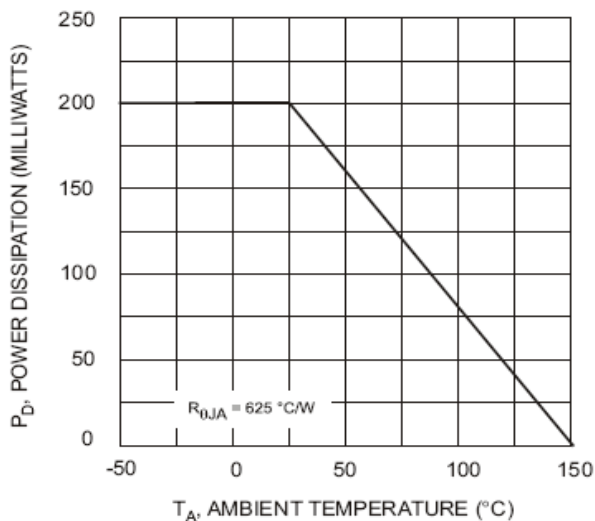

Digital Transistor

DTC(R₁≠R₂ SERIES)CA

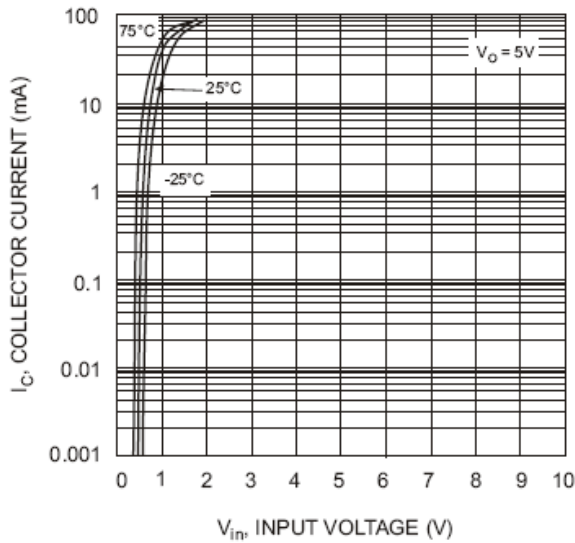


Fig. 5 Collector Current Vs. Input Voltage


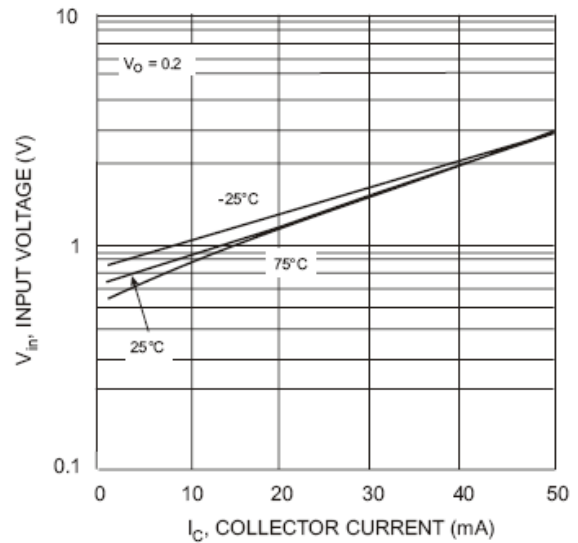


Fig. 6 Input Voltage vs. Collector Current

PACKAGE OUTLINE

Plastic surface mounted package


SOT-23

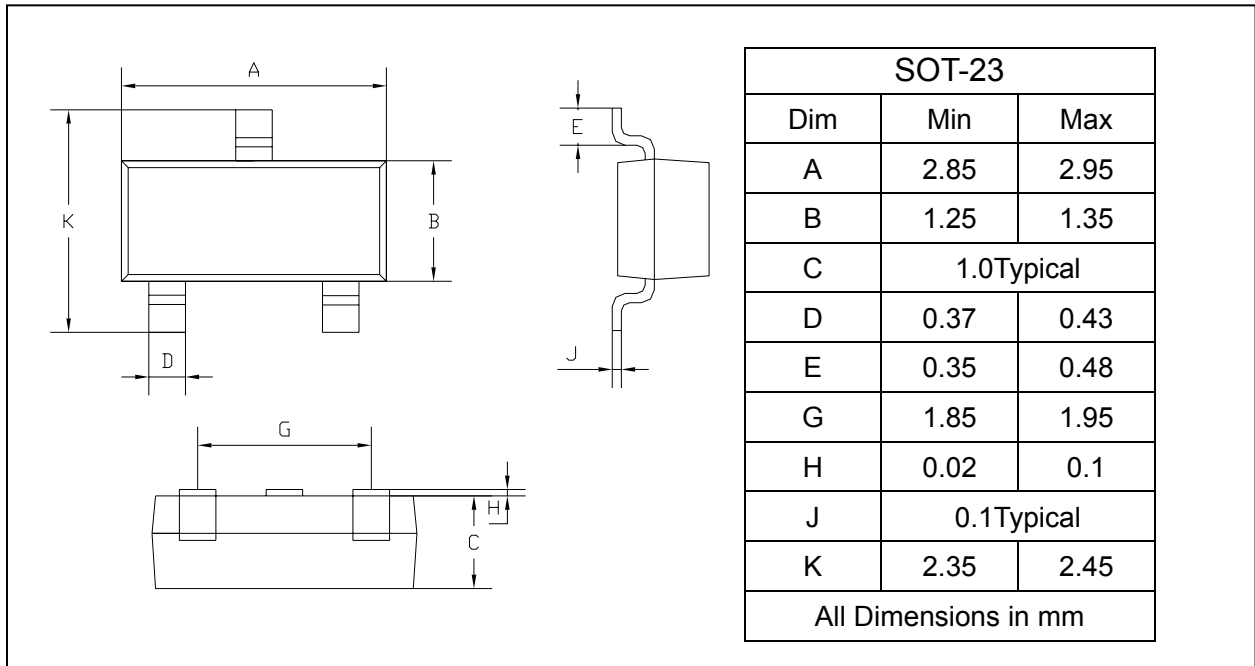

Digital Transistor

DTC(R₁≠R₂ SERIES)CA

SOLDERING FOOTPRINT

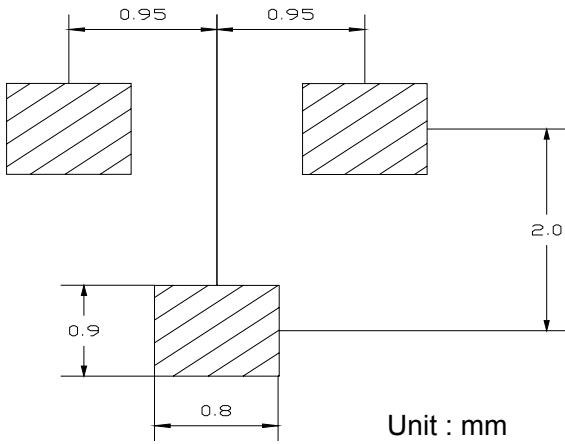

PACKAGE INFORMATION

Device	Package	Shipping
DTCXXXCA	SOT-23	3000/Tape&Reel