SERIES EG1300 SWITCHES

SLIDE SWITCHES

FEATURES & BENEFITS
Tape & Reel Packaging
3-position

APPLICATIONS / MARKETS
Computer Servers/peripherals
Consumer electronics
Instrumentation
Test & measurement

MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf to center position 150 +/-100 gf from center position
Travel:	1.5 +/- 0.1mm each position

ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10ºC to +60ºC
Storage Temperature:	-20ºC to +80ºC

HOW TO ORDER:

SERIES: EG

MODEL: 1300

ACTUATOR "L": A = 1.5mm x 1.1 mm; B = 1.5mm x 0.40mm



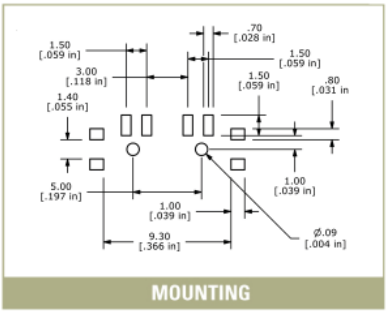

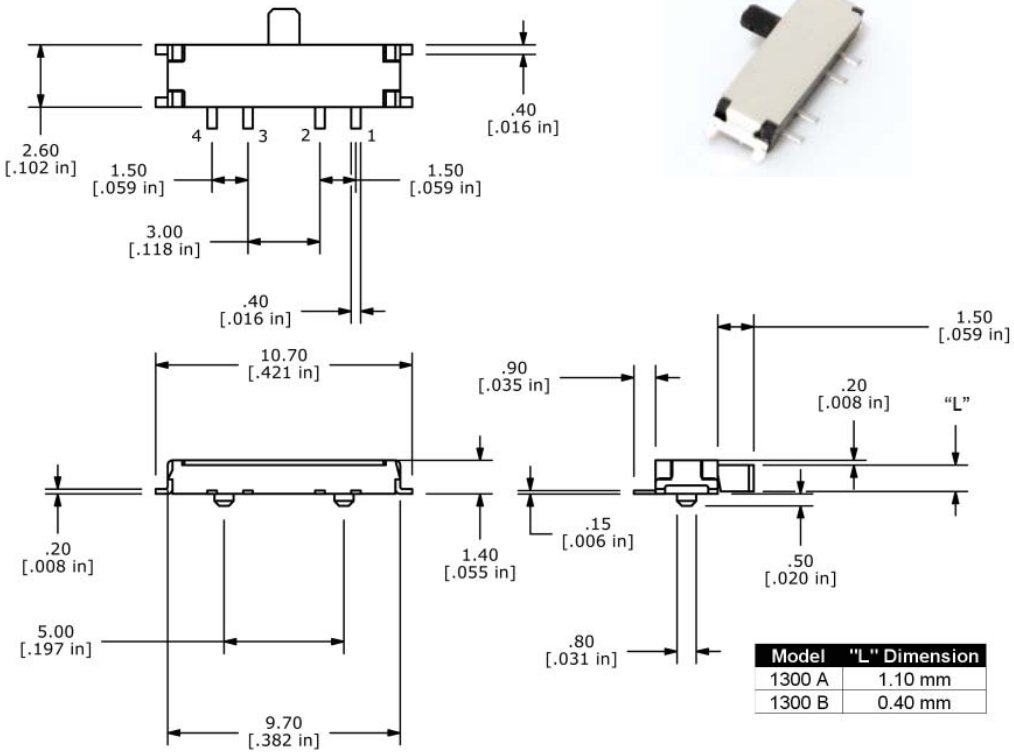

Model	"L" Dimension
1300 A	1.10 mm
1300 B	0.40 mm

www.e-switch.com
email: info@e-switch.com

7153 NORTHLAND DRIVE NORTH
MINNEAPOLIS, MN 55428

PHONE: 800-867-2717
FAX: 763-531-8235