


# EMG 45-RELS/K2


Order No.: 2950666



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2950666>

Relay module, with plug-in base for KAMMRELAIS® size 2, contact: B 110, 4 PDT



Commercial data	
GTIN (EAN)	
sales group	G020
Pack	5 pcs.
Customs tariff	85364190
Catalog page information	Page 103 (IF-2002)

### Product notes

WEEE/RoHS-compliant since:  
04/14/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3

### General data

Width	45 mm
Height	75 mm
Depth	82.5 mm
Color	green
Insulating material	PC-F
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0109-11, draft
	DIN EN 50178/DIN VDE 0160 (in relevant parts)
Mounting position	Any
Assembly instructions	In rows with zero spacing

## Certificates / Approvals



Certification


GOST

**Accessories**

Item	Designation	Description
<b>Marking</b>		
2947035	EMG-GKS 12	Equipment marker, width 12 mm

**Diagrams/Drawings**

Circuit diagram

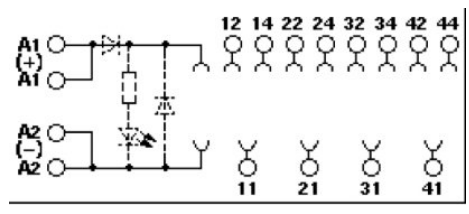

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;