


# ENC-03M

Discontinued **RoHS** **REACH**

## Appearance & Shape

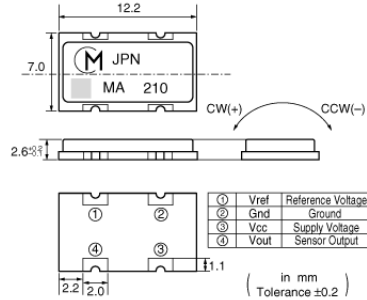

## Applications

Limited Usage	DSC,DVC
---------------	---------

## Packaging Information

Packaging	Specifications	Minimum Order Quantity
R	Reel	2000

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products n it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# ENC-03M

## Specifications

Operating Temperature Range	-5°C to 75°C
Supply Voltage	2.7-5.25V
Output	1.35Vdc
Temp. Coefficient of Scale Factor	20%at -5to+75°C
Response(max.)	50.0Hz
Axis	1(X)
Mass	0.4g
Storage Temperature Range	-30°C to 85°C
Maximum Range	300deg./sec.
Sensitivity	0.67mV/deg./sec.

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.