




**FEATURES**

- High current capability
- High surge current capability
- High reliability
- High efficiency
- Low power loss
- Low forward voltage drop
- Low cost

**MECHANICAL DATA**

Case : DO-41 Molded plastic  
 Epoxy : UL94V-O rate flame retardant  
 Lead : Axial lead solderable per MIL-STD-202,  
 Method 208 guaranteed  
 Polarity : Color band denotes cathode end  
 Mounting position : Any  
 Weight : 0.339 gram

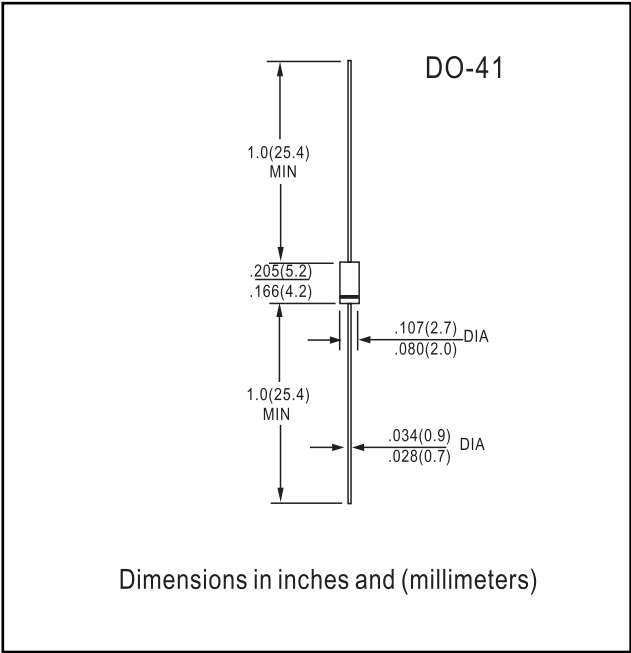

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	90	V
Maximum DC Blocking Voltage	$V_{DC}$	90	V
Maximum Average Forward Current (Note 1)	$I_{F(AV)}$	1.0	A
Maximum Peak Forward Surge Current	$I_{FSM}$	30	A
Maximum Forward Voltage at $I_F = 1.0$ A	$V_F$	0.9	V
Maximum Reverse Current at $V_R = V_{RRM}$	$I_R$	1.0	mA
Junction Temperature Range	$T_J$	- 40 to + 150	°C
Storage Temperature Range	$T_{STG}$	- 40 to + 150	°C

Note : (1) PC Booad mounting (land 10 x 10 mm)



RATINGS AND CHARACTERISTIC CURVES ERA84-009

FIG.1 - FORWARD CURRENT DERATING CURVE

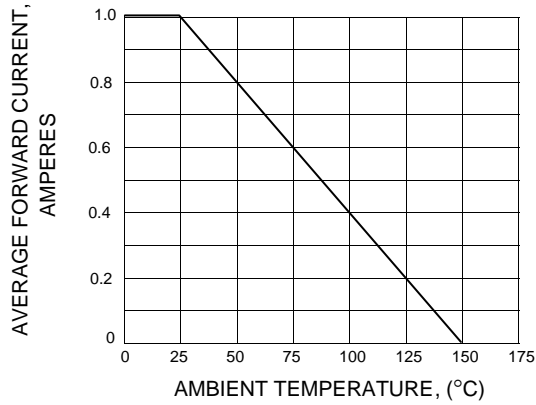


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

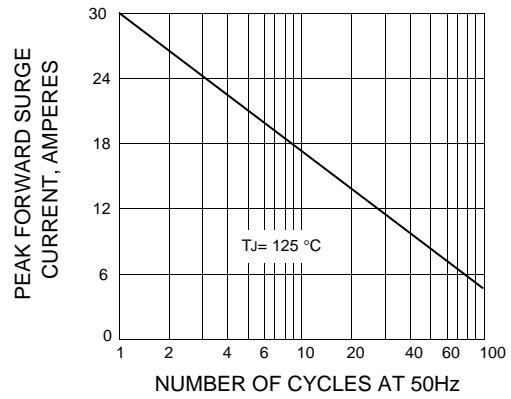


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

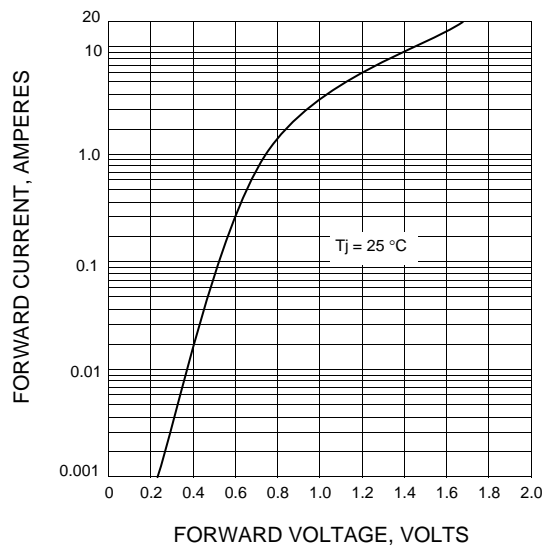


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

