

| | | |
|--|--|---------------------|
| EXAMINED BY : <i>Jason Ma.</i> | EMERGING DISPLAY TECHNOLOGIES CORPORATION | FILE NO . CAS-50197 |
| APPROVED BY: <i>David Chang</i> | | ISSUE : AUG.03,2000 |
| | | TOTAL PAGE : 10 |
| | | VERSION : 4 |

CUSTOMER ACCEPTANCE SPECIFICATIONS

MODEL NO. :

EW 3 2 F 9 0 F L W

FOR MESSRS :

CUSTOMER'S APPROVAL

DATE :

BY :

EMERGING DISPLAY
TECHNOLOGIES CORPORATION

| | |
|----------------------------------|--------------|
| MODEL NO. E W 3 2 F 9 0 F L W | VERSION 4 |
|----------------------------------|--------------|

| | | |
|---------------------|-------------------|-------------|
| RECORDS OF REVISION | DOC . FIRST ISSUE | MAR.31,2000 |
|---------------------|-------------------|-------------|

| DATE | REVISED PAGE NO. | SUMMARY |
|-------------|------------------|--|
| APR.05,2000 | 1 | 2. MECHANICAL SPECIFICATIONS (2) MODULE SIZE : 88.3W * 68.6H * 7.0 D (max.) mm → 88.3W * 68.6H * 7.5 D (max.) mm |
| | 7 | 7. OUTLINE DIMENSION ① MODULE THICKNESS : 7.0max → 7.5 max ② FLEX CABLE : PITCH 1.25 → PITCH 1.0 |
| | 9 | 9. DETAIL DRAWING OF DOT MATRIX 57.59 L * 76.79 W → 76.79 L * 57.59 W |
| JUN.12,2000 | 1 | 2. MECHANICAL SPECIFICATIONS (2) MODULE SIZE : 88.3W * 68.6H * 7.5 D (max.) mm → 93.8W * 66.6H * 6.5 D (max.) mm |
| | 7 | 7. OUTLINE DIMENSION ALL PAGE WAS CHANGED. |
| AUG.03,2000 | 2 | 3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS POWER SUPPLY FOR LED : VLED - VLSS : 4.0 V max → 5.0 V max |
| | 3 | ALL PAGE WAS CHANGED . |
| | 10 | 11.1 POWER SUPPLY FOR LCM VEE - VSS = 18.0 → 21.5 V VLED - VLSS = 3.6 → 5.0 V |
| | | |

TABLE OF CONTENTS

| NO. | ITEM | PAGE |
|-----|------------------------------------|------|
| 1. | GENERAL SPECIFICATIONS ----- | 1 |
| 2. | MECHANICAL SPECIFICATIONS ----- | 1 |
| 3. | ABSOLUTE MAXIMUM RATINGS ----- | 2 |
| 4. | ELECTRICAL CHARACTERISTICS ----- | 3 |
| 5. | TIME CHARACTERISTICS ----- | 4,5 |
| 6. | OPTICAL CHARACTERISTICS ----- | 6 |
| 7. | OUTLINE DIMENSION ----- | 7 |
| 8. | BLOCK DIAGRAM ----- | 8 |
| 9. | DETAIL DRAWING OF DOT MATRIX ----- | 9 |
| 10. | INTERFACE SIGNAL ----- | 9 |
| 11. | POWER SUPPLY ----- | 10 |

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

EU-002A

1.2 THIS INDIVIDUAL SPECIFICATIONS IS PRIOR TO GENERAL SPECIFICATIONS .

2. MECHANICAL SPECIFICATIONS

| | | |
|------------------------|-------|---|
| (1) NUMBER OF DOTS | ----- | 320W * 240H DOTS |
| (2) MODULE SIZE | ----- | 93.8W * 66.6H * 6.5 D (max.) mm |
| (3) EFFECTIVE AREA | ----- | 78.8W * 59.6H mm |
| (4) ACTIVE AREA | ----- | 76.79W * 57.59H mm |
| (5) DOT SIZE | ----- | 0.23W * 0.23H mm |
| (8) DOT PITCH | ----- | 0.24W * 0.24H mm |
| (9) LCD TYPE | ----- | FSTN, POSITIVE, BLACK/WHITE, TRANSFLECTIVE |
| (10) DRIVING METHOD | ----- | 1 / 240 DUTY MULTIPLEX DRIVE |
| (11) VIEWING DIRECTION | ----- | 6 O'CLOCK |
| (12) BACK LIGHT | ----- | LED; COLOR : WHITE |

3. ABSOLUTE MAXIMUM RATINGS

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS. (AT Ta = 25 °C)

| PARAMETER | SYMBOL | MIN . | MAX . | UNIT | REMARK |
|------------------------------|-------------|-------|-------|------|----------|
| POWER SUPPLY FOR LOGIC | VDD – VSS | 0 | 7.0 | V | |
| POWER SUPPLY FOR LCD DRIVING | VEE – VSS | 0 | 27 | V | |
| INPUT VOLTAGE | VI | VSS | VDD | V | |
| STATIC ELECTRICITY | — | — | 100 | V | NOTE (1) |
| POWER SUPPLY FOR LED | VLED – VLSS | — | 5.0 | V | |

NOTE (1) : TEST METHOD AND CONDITIONS :
AFTER CHARGING UP 200 PF CAPACITOR BY STATED VOLTAGE ,
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE
MODULE .

3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

| I T E M | OPERATING | | STORAGE | | REMARK |
|---------------------|----------------|-----------------------------------|----------------|-----------------------------------|---|
| | MIN . | MAX . | MIN . | MAX . | |
| AMBIENT TEMPERATURE | - 20 °C | 70 °C | - 20 °C | 70 °C | NOTE (2), (3) |
| HUMIDITY | — | 85 % RH | — | 85 % RH | WITHOUT CONDENSATION |
| VIBRATION | — | 2.45 m/S ² (0.25 G) | — | 11.76 m/S ² (1.2 G) | 10---100HZ XYZ DIRECTIONS 1 Hr.EACH |
| SHOCK | — | 29.4 m/S ² (3 G) | — | 490 m/S ² (50 G) | 10 mSECONDS XYZ DIRECTIONS 1 TIME EACH |
| CORROSIVE GAS | NOT ACCEPTABLE | | NOT ACCEPTABLE | | |

NOTE (2) : Ta AT -20°C : 48HR MAX.
70°C : 168HR MAX.

NOTE (3) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C


| PARAMETER | SYMBOL | CONDITION | MIN . | TYP . | MAX . | UNIT |
|---|--|--------------------------------|--------|----------|--------|------|
| POWER SUPPLY VOLTAGE FOR LOGIC | VDD – VSS | — | 2.5 | — | 5.0 | V |
| POWER SUPPLY VOLTAGE FOR LCD DRIVE | VEE – VSS | — | +15 | — | +27 | V |
| INPUT VOLTAGE NOTE (1) | VIH | H LEVEL | 0.8VDD | — | — | V |
| | VIL | L LEVEL | — | — | 0.2VDD | V |
| POWER SUPPLY CURRENT FOR LOGIC NOTE (2) | IDD | VDD–VSS =3.0V VEE–VSS=21.5V | — | (90) | — | μA |
| POWER SUPPLY CURRENT FOR LCD DRIVE NOTE (2) | IEE | VDD–VSS =3.0V VEE–VSS=21.5V | — | (3.0) | — | mA |
| CONTRAST ADJUST VOLTAGE | VEE – VSS ∅ = 10°, θ = 0° DUTY=1/240 | Ta = -20 °C | — | (24) | — | V |
| | | Ta = 25 °C | — | (21.5) | — | V |
| | | Ta = 70 °C | — | (18) | — | V |
| CLOCK OSCILLATION FREQUENCY | fFLM | — | 70 | 75 | 80 | HZ |
| POWER SUPPLY FOR LED | VLED – VLSS | IF = 100 mA | — | 5.0 | — | V |

NOTE (1) : APPLIED TO TERMINALS FLM , CL1, CL2, M, D0, D1, D2, D3.

NOTE (2) : THIS DISPLAY PATTERN IS ALL ON OR OFF.


NOTE (3) : RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT ± 1 . 0 V BY EACH MODULE.

5. TIMING CHARACTERISTICS
5.1 INTERFACE TIMING

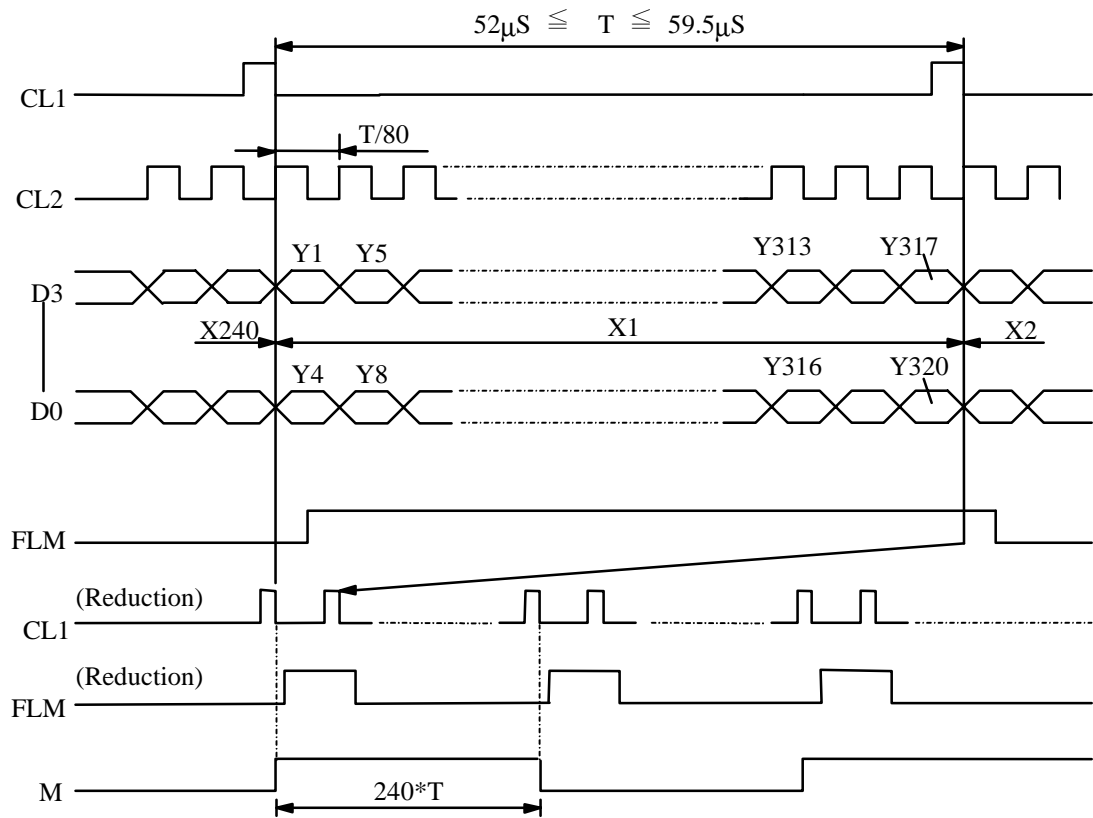

5.2 SWITCHING CHARACTERISTICS

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|-------------------|--------|------|------|------|------|
| CL1 PULSE WIDTH | tw1 | 30 | — | — | ns |
| CL2 PULSE | tw | 51 | — | — | ns |
| RISE,FALL TIME | tr,tf | — | — | 50 | ns |
| DATA SETUP TIME | tDSU | 30 | — | — | ns |
| DATA HOLD TIME | tDHD | 40 | — | — | ns |
| CL1 SETUP TIME | tLSU | 51 | — | — | ns |
| CL1 TO CL2 TIME | tLC | 51 | — | — | ns |
| FLM SETUP TIME | tsetup | 30 | — | — | ns |
| FLM HOLD TIME | thold | 50 | — | — | ns |
| OUTPUT DELAY TIME | tDF | — | — | 200 | ns |

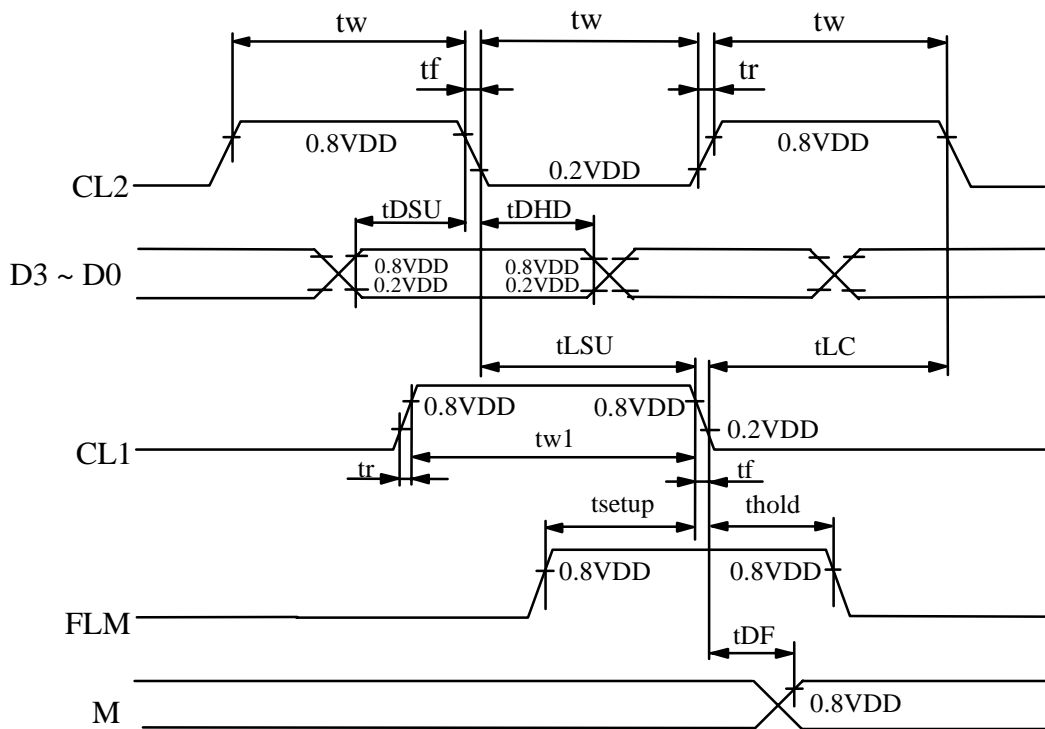


6. OPTICAL CHARACTERISTICS

Ta = 25 °C

| I T E M | SYMBOL | CONDITION | MIN . | TYP . | MAX. | UNIT | NOTE |
|---------------------------------|---------------------------------|--|-------|---------|------|-------------------|------|
| VIEWING AREA | $\varnothing 2 - \varnothing 1$ | $K \geq 2.0$ | 50 | — | — | deg. | 1 |
| CONTRAST | K | $\varnothing = 10^\circ$ | 5 | — | — | — | 1 |
| RESPONSE TIME | t r (rise) | $\varnothing = 10^\circ$ $\theta = 0^\circ$ | — | (330) | — | msec | 1 |
| | t f (fall) | $\varnothing = 10^\circ$ $\theta = 0^\circ$ | — | (330) | — | msec | 1 |
| THE BRIGHTNESS OF BACK-LIGHT | B | $\varnothing = 10^\circ$ $\theta = 0^\circ$ | 10 | — | — | cd/m ² | 1 |


NOTE (1) : PLEASE REFER TO :
CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS. (EU - 002A)

7. OUTLINE DIMENSION

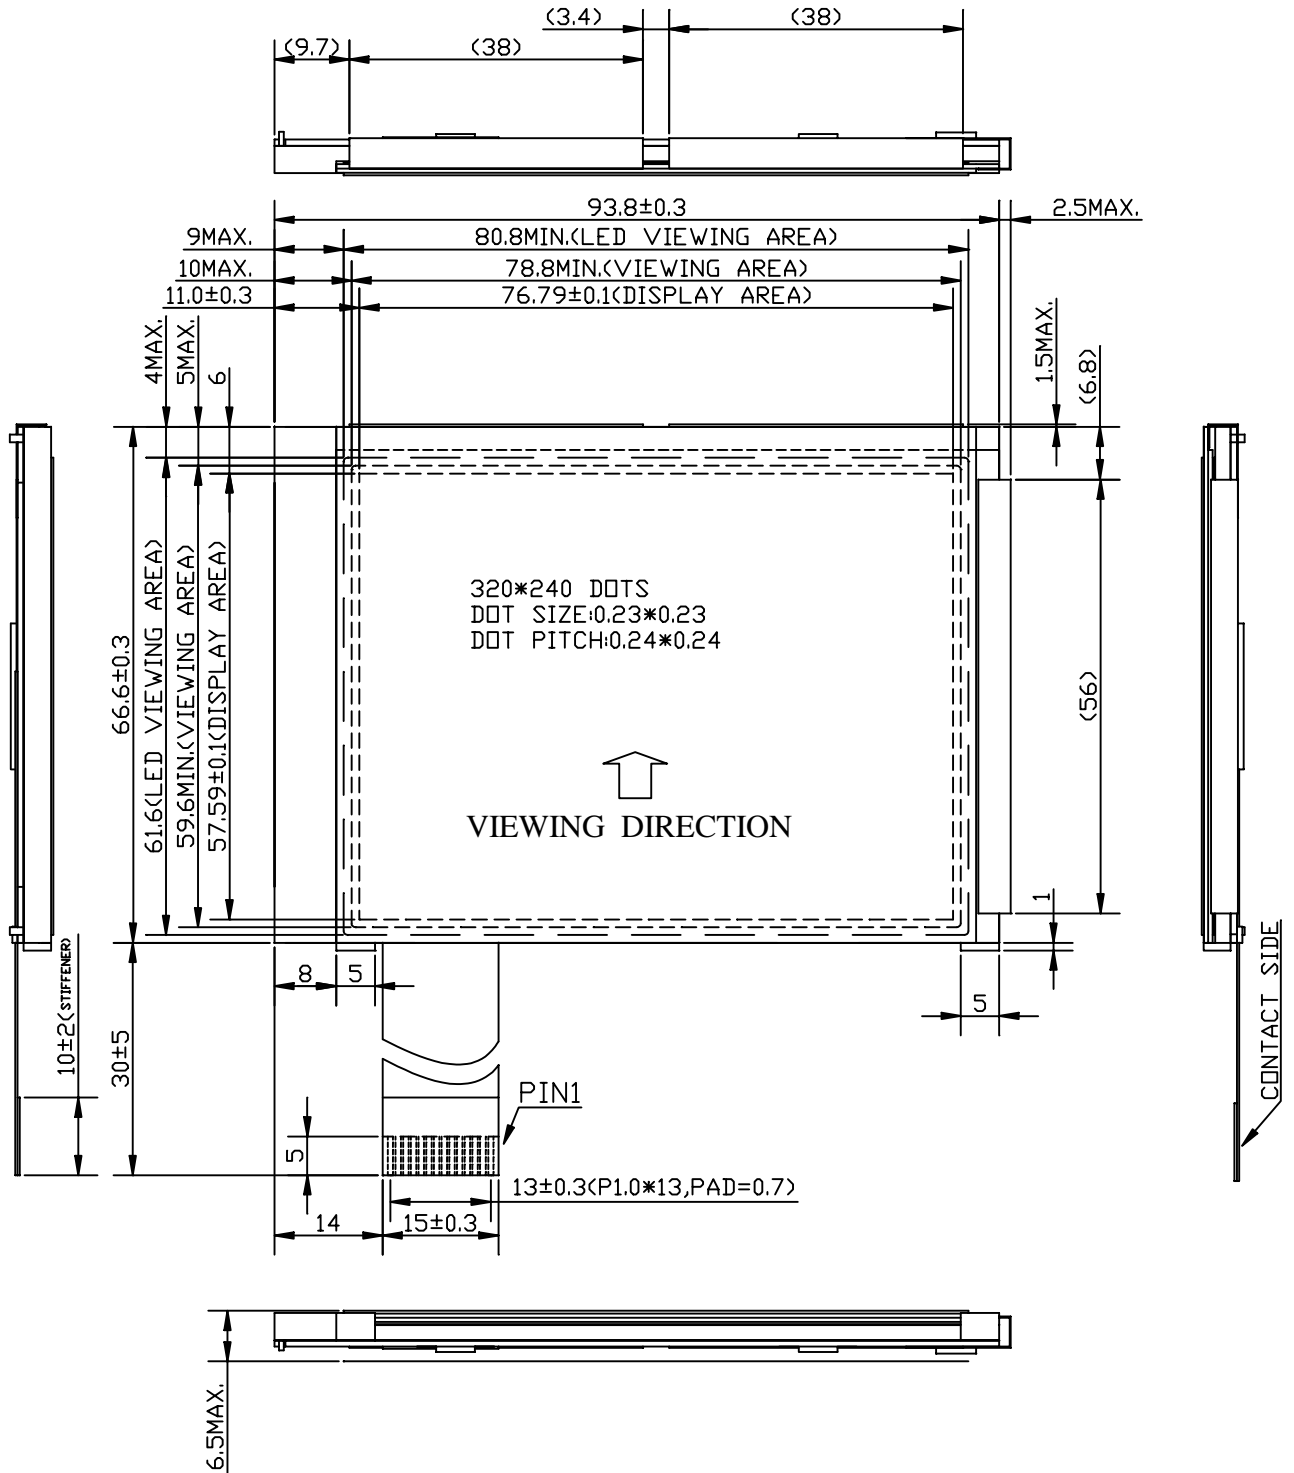


UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.5

8. BLOCK DIAGRAM

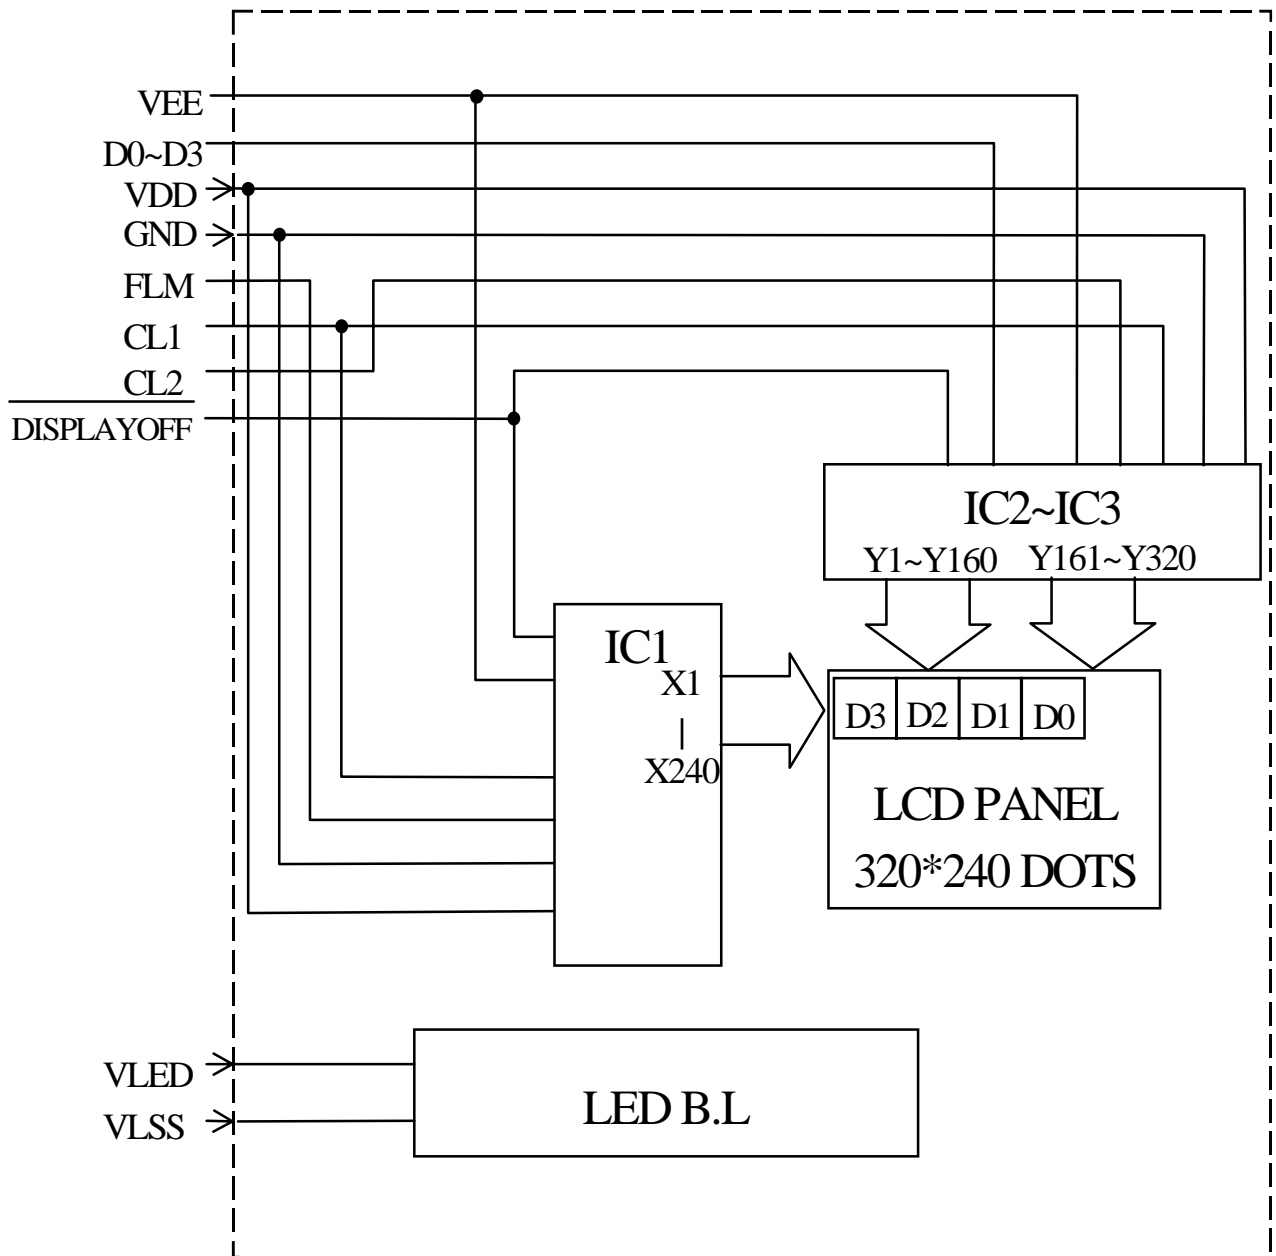

9. DETAIL DRAWING OF DOT MATRIX

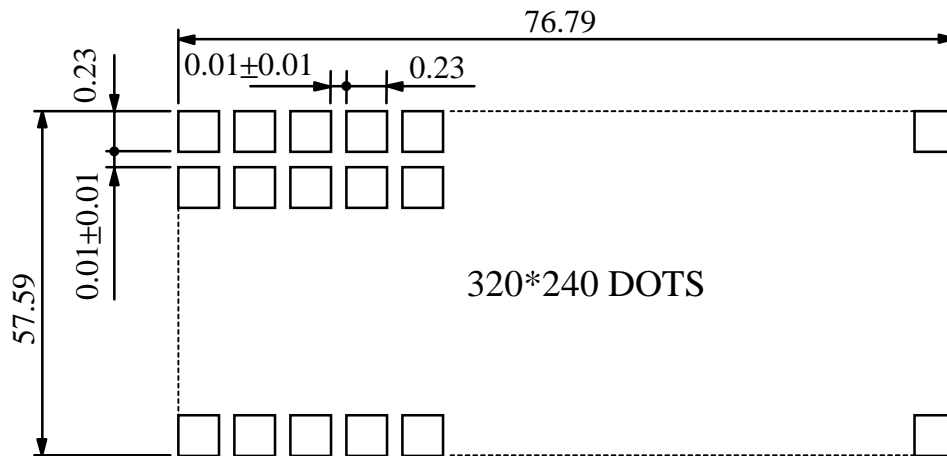


UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.1

10. INTERFACE SIGNALS

| PIN NO. | SYMBOL | FUNCTION |
|---------|--------------------------------|--|
| 1 | VDD | POWER SUPPLY FOR LOGIC CIRCUIT. |
| 2 | VSS | GROUND. |
| 3 | VEE | POWER SUPPLY FOR LCD DRIVING VOLTAGE |
| 4 | FLM | THE FLM SIGNAL INDICATING THE BEGINNING OF EACH DISPLAY CYCLE. |
| 5 | N.C | NO CONNECTION |
| 6 | CL1 | DISPLAY DATA LATCH. |
| 7 | CL2 | DISPLAY DATA SHIFT. |
| 8 | D0 | DISPLAY DATA |
| 9 | D1 | DISPLAY DATA |
| 10 | D2 | DISPLAY DATA |
| 11 | D3 | DISPLAY DATA |
| 12 | $\overline{\text{DISPLAYOFF}}$ | CONTROLL LCD ON/OFF “ L “ : DISPLAY OFF , “ H “ DISPLAY ON |
| 13 | VLED | POWER SUPPLY FOR LED B.L |
| 14 | VLSS | POWER SUPPLY FOR LED B.L |

1 1 . POWER SUPPLY

1 1 .1 POWER SUPPLY FOR LCM

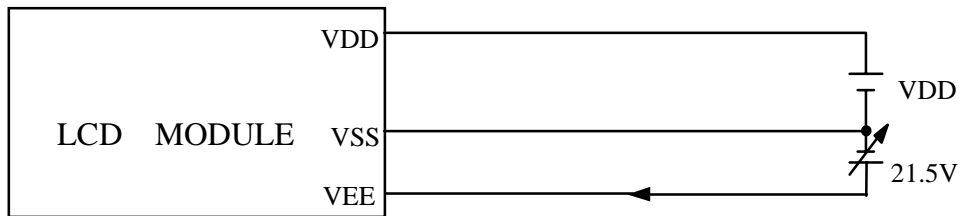

1 1 .2 POWER SUPPLY FOR LED BACK - LIGHT

