

HCMOS 2.5x2.0mm 2.5V SMD Oscillator



Model: F240 Series

RoHS Compliant / Pb Free

Rev. 6/30/2011

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



FEATURES

- Tight Stability
- 2.5V Operation
- HCMOS Output
- Standby Function
- Tape and Reel (3,000 pcs. STD)

PART NUMBER SELECTION [Learn More](#) - Internet Required

Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
833J-Frequency-xxxxx	F246R	±25PPM	-40 ~ +85	4.000 ~ 54.000
833D-Frequency-xxxxx	F247	±15PPM	-10 ~ +70	4.000 ~ 54.000
833E-Frequency-xxxxx	F247R	±15PPM	-40 ~ +85	4.000 ~ 54.000
833F-Frequency-xxxxx	F249	±10PPM	-10 ~ +70	4.000 ~ 54.000
833G-Frequency-xxxxx	F249R	±10PPM	-40 ~ +85	4.000 ~ 54.000

ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	4.000 ~ 54.000 MHz
Storage Temperature Range	-40°C ~ +85°C
Supply Voltage (VDD)	2.5V ± 10%
Input Current	7.0mA
Output Symmetry (50% VDD)	45% ~ 55%
Rise Time (10% ~ 90% VDD)	5.0nS
Fall Time (90% ~ 10% VDD)	5.0nS
Output Voltage (VOL)	10% VDD
(VOH)	90% VDD Min
Output Current (IOL)	4mA Min
(IOH)	-4mA Min
Output Load (HCMOS)	15pF
Standby Current	10µA
Start-up Time (Ts)	10mS
Output Disable Time ²	250nS
Output Enable Time ²	10mS
Phase Noise (@ 10kHz offset)	-145dBc/Hz Typ.
Period Jitter	3pS RMS Typ.
Reflow Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni


¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow and one year aging.

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Note: A 0.01µF bypass capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply line noise.

Drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

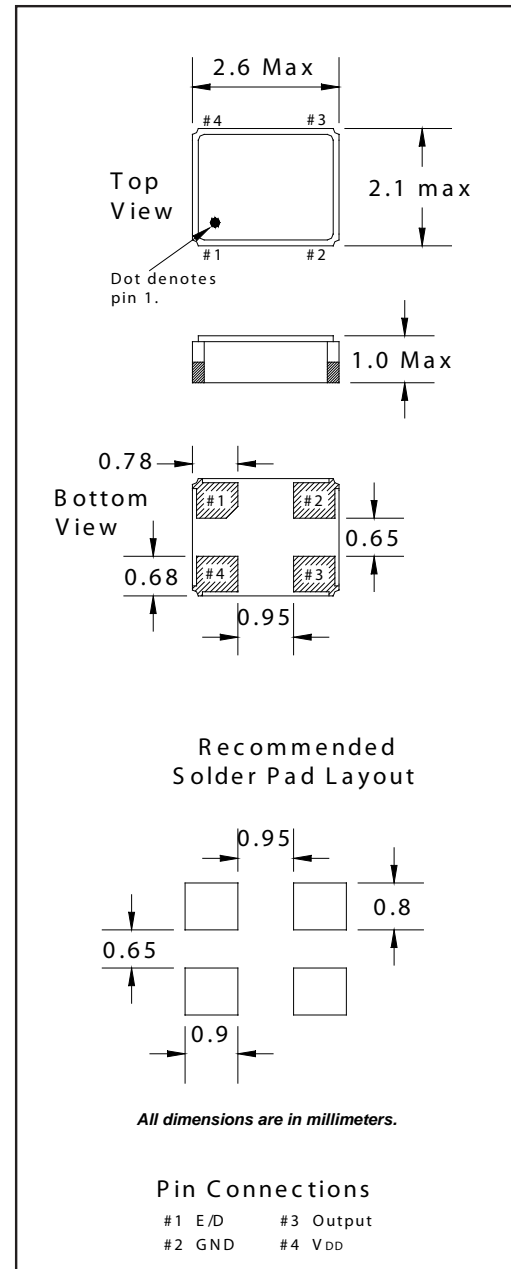

All dimensions are in millimeters.

Pin Connections

#1 E/D #3 Output
#2 GND #4 VDD

ENABLE / DISABLE FUNCTION

Pin 1	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level $V_{IH} \geq 70\% V_{DD}$	ACTIVE
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

HCMOS 2.5x2.0mm 2.5V SMD Oscillator



Model: F240 Series

RoHS Compliant / Pb Free

Rev. 6/30/2011

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
F240	∅1.5	4.0	4.0	3.5	8.0	1.15	3,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
F240	2.0	∅13	∅21	∅60	∅180	9.0	2.0

