






FMBT4401

Description

Mechanical Dimensions



Maximum Ratings


Ratings	Symbol	Value	Units
Collector - Emitter Voltage	V_{CE0}	40	V
Collector - Base Voltage	V_{CB0}	60	V
Emitter - Base Voltage	V_{EB0}	6.0	V
Collector Current (Continuous)	I_C	600	mA
Total Device Dissipation FR-5 Board (Note1) $T_A = 25^\circ\text{C}$	P_D	350	mW
Junction and Storage Temperature	T_J, T_{STG}	-55 to 150	$^\circ\text{C}$

Electrical Characteristics @ 25°C


Characteristic	Symbol	Min	Max	Unit
Collector - Emitter Breakdown Voltage ($I_C = 1.0\text{mA}$)	$V_{BR(CEO)}$	40	---	V
Collector - Base Breakdown Voltage ($I_C = 0.1\text{mA}$)	$V_{BR(CBO)}$	60	---	V
Emitter - Base Breakdown Voltage ($I_E = 0.01\text{mA}$)	$V_{BR(EB0)}$	6.0	---	V
Collector Cutoff Current ($V_{CE} = 35\text{V}, V_{EB} = -0.4\text{V}$)	I_{CEX}	---	0.1	μA
DC Current Gain ($I_C = 0.1\text{mA}, V_{CE} = 1.0\text{V}$)	H_{FE}	20	---	---
($I_C = 1.0\text{mA}, V_{CE} = 1.0\text{V}$)		40	---	
($I_C = 10\text{mA}, V_{CE} = 1.0\text{V}$)		80	---	
($I_C = 150\text{mA}, V_{CE} = 1.0\text{V}$)		100	300	
($I_C = 500\text{mA}, V_{CE} = 2.0\text{V}$)		40	---	
Collector - Emitter Saturation Voltage (Note 3) ($I_C = 150\text{mA}, I_B = 15\text{mA}$)	$V_{CE(sat)}$	---	0.4	Vdc
($I_C = 500\text{mA}, I_B = 50\text{mA}$)		---	0.75	
Base - Emitter Saturation Voltage (Note 3) ($I_C = 150\text{mA}, I_B = 15\text{mA}$)	$V_{BE(sat)}$	---	0.95	Vdc
($I_C = 500\text{mA}, I_B = 50\text{mA}$)		---	1.2	
Current - Gain - Bandwidth Product ($I_C = 20\text{mA}, V_{CE} = 10\text{V}, f = 100\text{MHz}$)	f_T	250	---	MHz
Collector-Base Capacitance ($V_{CB} = 5\text{V}, I_E = 0, f = 1.0\text{MHz}$)	C_{cb}	---	6.5	pF

FMBT4401 NPN Switching Transistor


DC CURRENT GAIN

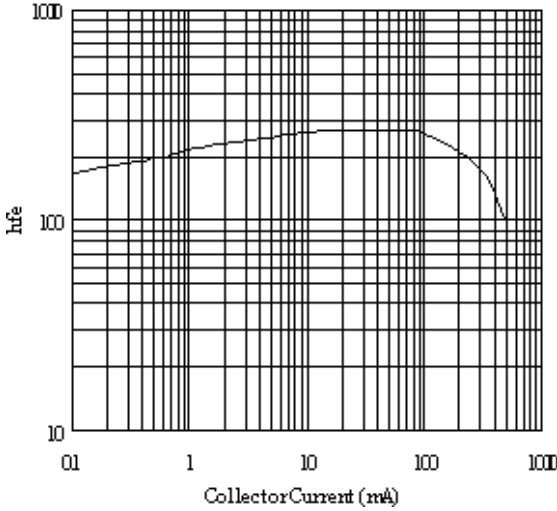

COLLECTOR TO EMITTER SATURATION VOLTAGE

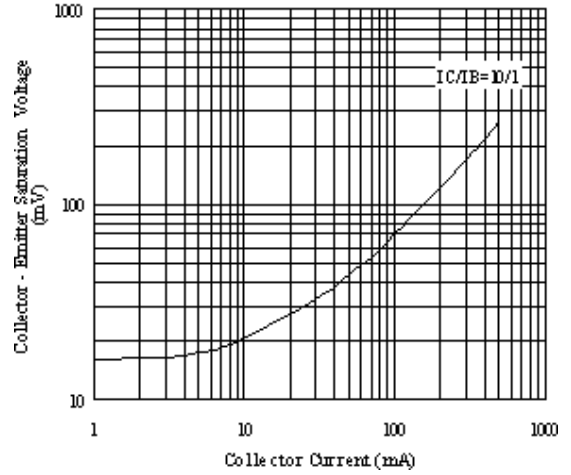

COLLECTOR TO EMITTER SATURATION VOLTAGE

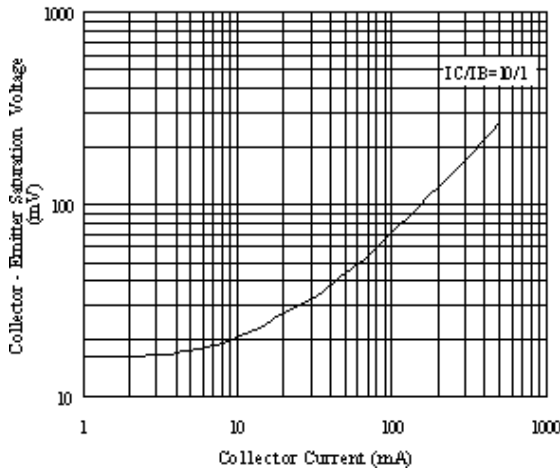

CURRENT GAIN-BANDWIDTH PRODUCT

