

## FR101 THRU FR107


CURRENT 1.0 Ampere  
VOLTAGE 50 to 1000 Volts

### Features

- Plastic package has Underwrites Laboratory Flammability Classification 94V-0
- Fast switching speed
- Construction utilizes void-free molded plastic technique
- Low forward voltage drop, high efficiency
- High current capability
- High reliability

### Mechanical Data

- Case : JEDEC DO-41 molded plastic body
- Terminals : Plated axial lead solderable per MIL-STD-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.012 ounce, 0.33 gram

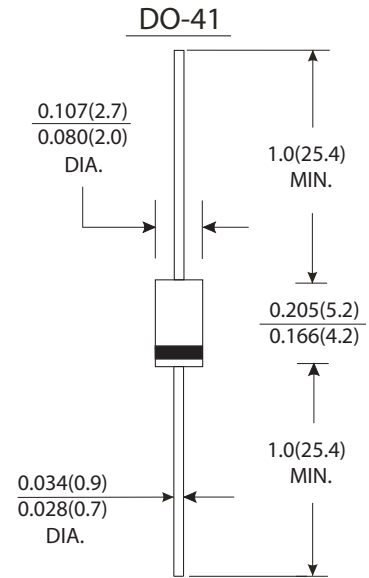

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	FR 101	FR 102	FR 103	FR 104	FR 105	FR 106	FR 107	Units
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length T <sub>A</sub> =75 °C	I <sub(av)< sub=""></sub(av)<>	1.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	30.0							Amps
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	1.3							Volts
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>	5.0							μA
Maximum full load reverse current full cycle average. 0.375"(9.5mm) lead length at T <sub>L</sub> =55 °C		100							
Maximum reverse recovery time (Note 1)	T <sub>rr</sub>	150				250	500		ns
Typical junction capacitance (Note 2)	C <sub>J</sub>	15.0							pF
Operating junction and storage temperature range	T <sub>J</sub> T <sub>STG</sub>	-65 to +150							°C

#### Notes:

- (1) Test conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A.
- (2) Measured at 1MHz and applied reverse voltage of 4.0 Volts.

## RATINGS AND CHARACTERISTIC CURVES FR101 THRU FR107

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

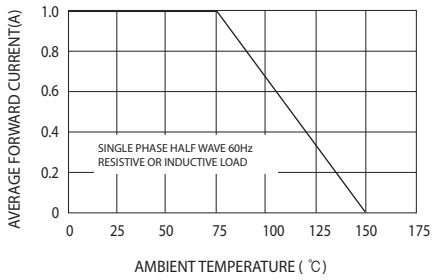


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

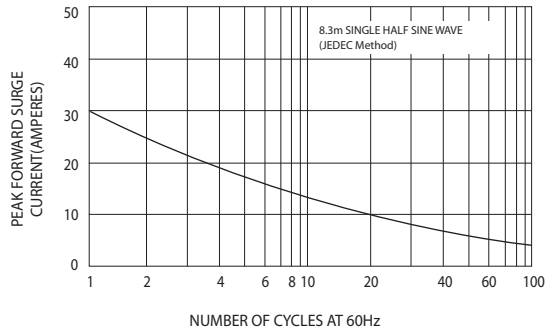


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

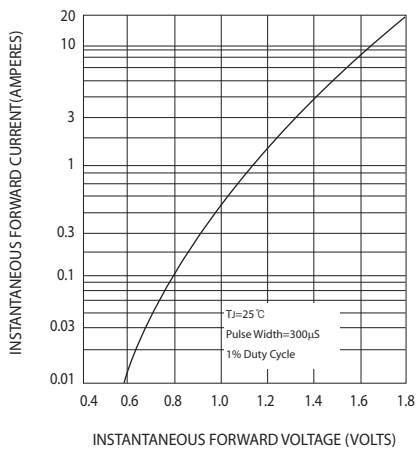


FIG.4-TYPICAL REVERSE CHARACTERISTICS

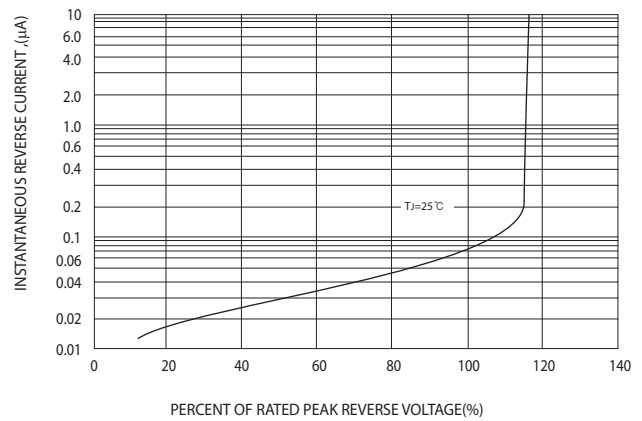


FIG.5-TYPICAL JUNCTION CAPACITANCE

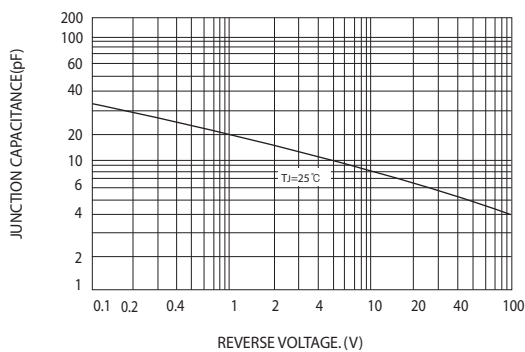


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

