

FAST RECOVERY RECTIFIER

<p>FEATURES</p> <ul style="list-style-type: none"> • Low cost construction • Fast switching for high efficiency. • Low reverse leakage • High forward surge current capability • High temperature soldering guaranteed: 260°C/10 seconds/0.375" (9.5mm) lead length at 5 lbs (2,3kg) tension <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> • Case: Transfer molded plastic • Epoxy: UL94V-0 rate flame retardant • Polarity: Color band denotes cathode end • Lead: Plated axial lead ,solderable per MIL-STD-202E method 208C • Mounting position: Any • Weight: 0.07 ounce, 2.0 grams 	<p>VOLTAGE RANGE CURRENT</p> <p>50 to 1000Volts 6.0 Amperes</p>	<p style="text-align: right;">R-6</p> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>							
<p>MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</p> <p>Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load derate current by 20%.</p>									
	SYMBOLS	FR 601	FR 602	FR 603	FR 604	FR 605	FR 606	FR 607	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	6.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	300							Amps
Maximum Instantaneous Forward Voltage at 6.0A	V_F	1.3							Volts
Maximum DC Reverse Current at rated DC blocking voltage	$T_A=25^\circ\text{C}$	10							μAmps
	$T_A=100^\circ\text{C}$	500							
Maximum Reverse Recovery Time(NOTE3) $T_j=25^\circ\text{C}$	t_{rr}	150			250	500		nS	
Typical Junction Capacitance(NOTE1)	C_J	150							pF
Typical Thermal Resistance(NOTE2)	$R_{\theta JA}$	10							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +175							$^\circ\text{C}$
<p>NOTES:</p> <p>1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts. 2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C. board mounted. 3. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$.</p>									

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

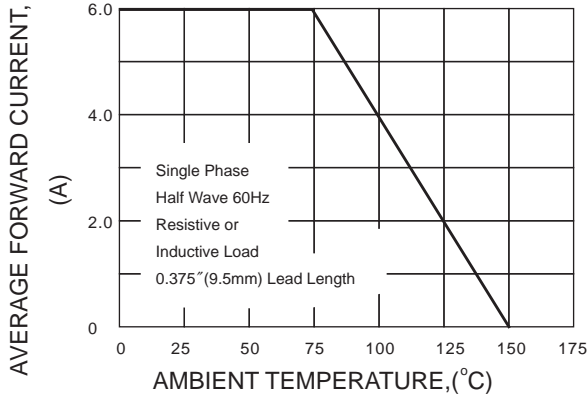


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

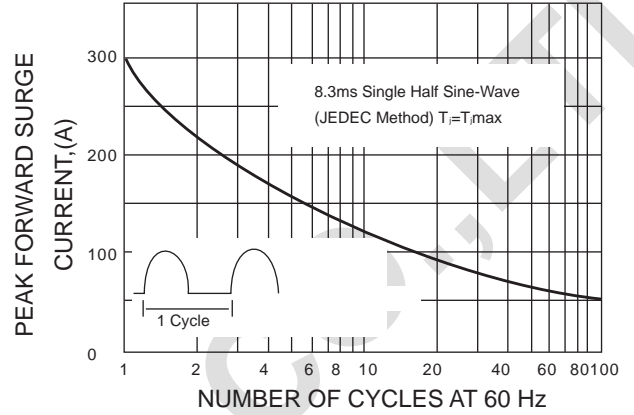


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

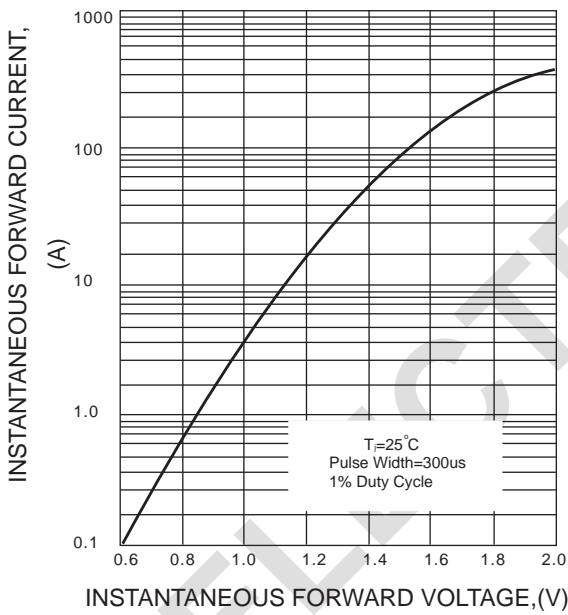


FIG.4-TYPICAL REVERSE CHARACTERISTICS

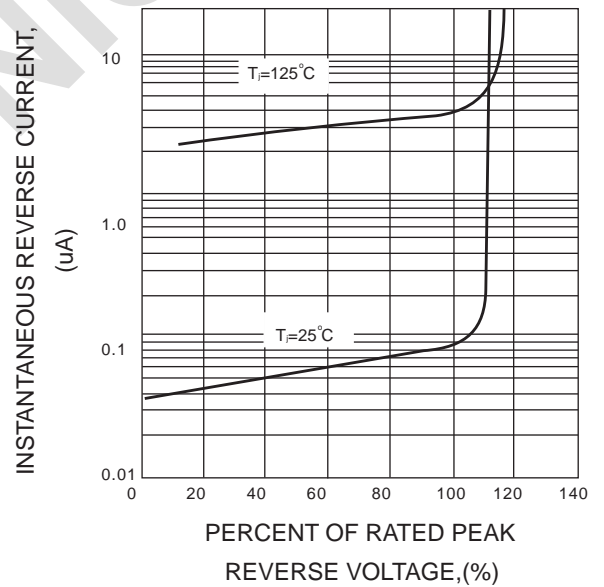


FIG.5-TYPICAL JUNCTION CAPACITANCE

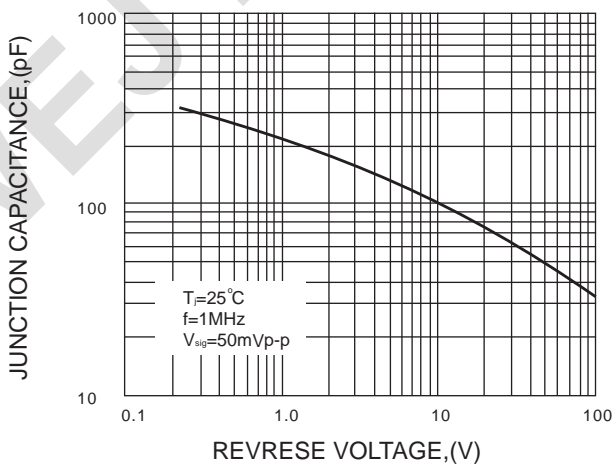


FIG.6-TYPICAL THERMAL RESISTANCE VS LEAD LENGTH

