


Normally – OFF Silicon Carbide Junction Transistor

V_{DS}	=	600 V
$R_{DS(ON)}$	=	120 mΩ
I_D ($T_c = 25^\circ\text{C}$)	=	25 A
$h_{FE}(T_c = 25^\circ\text{C})$	=	120

Features

- 250°C maximum operating temperature
- Gate Oxide Free SiC switch
- Exceptional Safe Operating Area
- Excellent Gain Linearity
- Temperature Independent Switching Performance
- Low Output Capacitance
- Positive Temperature Co-efficient of $R_{DS,ON}$
- Suitable for connecting an anti-parallel diode



Advantages

- Compatible with Si MOSFET/IGBT gate-drivers
- > 20 μs Short-Withstand Capability
- Lowest-in-class Conduction Losses
- High Circuit Efficiency
- Minimal Input Signal Distortion
- High Amplifier Bandwidth

Applications

- Down Hole Oil Drilling, Geothermal Instrumentation
- Hybrid Electric Vehicles (HEV)
- Solar Inverters
- Switched-Mode Power Supply (SMPS)
- Power Factor Correction (PFC)
- Induction Heating
- Uninterruptible Power Supply (UPS)
- Motor Drives

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit	Notes
Drain – Source Voltage	V_{DS}	$V_{GS} = 0\text{ V}$	600	V	
Continuous Drain Current	I_D	$T_c = 25^\circ\text{C}$	25	A	
Continuous Gate Current	I_{GM}		3	A	
Turn-Off Safe Operating Area	RBSOA	$T_{VJ} = 250^\circ\text{C}$, $I_G = 1\text{ A}$, Clamped Inductive Load	$I_{D,max} = 10$ @ $V_{DS} \leq V_{DSmax}$	A	
Short Circuit Safe Operating Area	SCSOA	$T_{VJ} = 225^\circ\text{C}$, $I_G = 2.5\text{ A}$, $V_{DS} = 400\text{ V}$, Non Repetitive	> 20	μs	
Reverse Gate – Source Voltage	V_{SG}		30	V	
Reverse Drain – Source Voltage	V_{SD}		25	V	
Storage Temperature	T_{stg}		-55 to 250	°C	

Electrical Characteristics

Parameter	Symbol	Conditions	Value			Unit	Notes
			Min.	Typical	Max.		
On State Characteristics							
Drain – Source On Resistance	$R_{DS(ON)}$	$I_D = 10\text{ A}$, $T_j = 25^\circ\text{C}$ $I_D = 10\text{ A}$, $T_j = 125^\circ\text{C}$ $I_D = 10\text{ A}$, $T_j = 175^\circ\text{C}$ $I_D = 10\text{ A}$, $T_j = 225^\circ\text{C}$	120			mΩ	Fig. 5
			180				
			240				
			320				
Gate Forward Voltage	$V_{GS(FWD)}$	$I_G = 500\text{ mA}$, $T_j = 25^\circ\text{C}$ $I_G = 500\text{ mA}$, $T_j = 225^\circ\text{C}$	2.95			V	Fig. 4
			2.63				
DC Current Gain	β	$V_{DS} = 5\text{ V}$, $I_D = 10\text{ A}$, $T_j = 25^\circ\text{C}$ $V_{DS} = 5\text{ V}$, $I_D = 10\text{ A}$, $T_j = 125^\circ\text{C}$ $V_{DS} = 5\text{ V}$, $I_D = 10\text{ A}$, $T_j = 175^\circ\text{C}$ $V_{DS} = 10\text{ V}$, $I_D = 10\text{ A}$, $T_j = 225^\circ\text{C}$	123			–	Fig. 5
			87				
			80				
			76				
Off State Characteristics							
Drain Leakage Current	I_{DSS}	$V_R = 600\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 25^\circ\text{C}$ $V_R = 600\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 125^\circ\text{C}$ $V_R = 600\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 225^\circ\text{C}$	10			μA	Fig. 6
			50				
			100				
Gate Leakage Current	I_{SG}	$V_{SG} = 20\text{ V}$, $T_j = 25^\circ\text{C}$	20			nA	

Figures

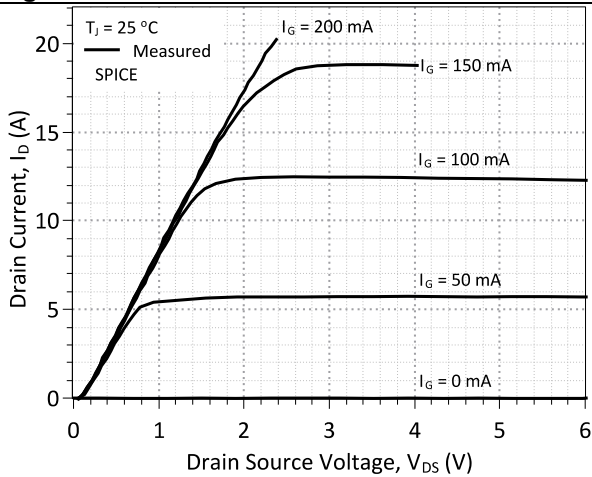


Figure 1: Typical Output Characteristics at 25 °C

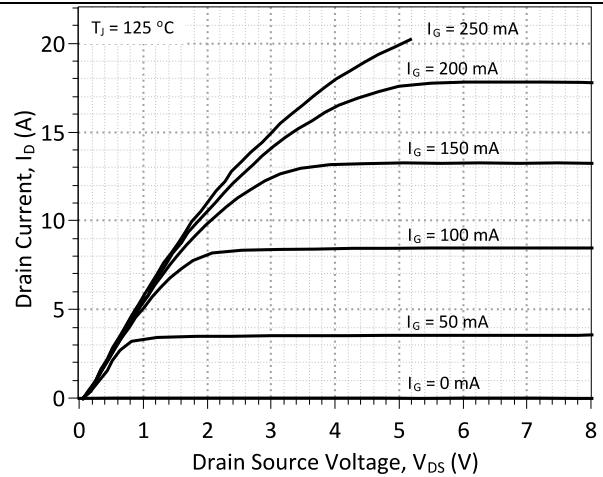


Figure 2: Typical Output Characteristics at 125 °C

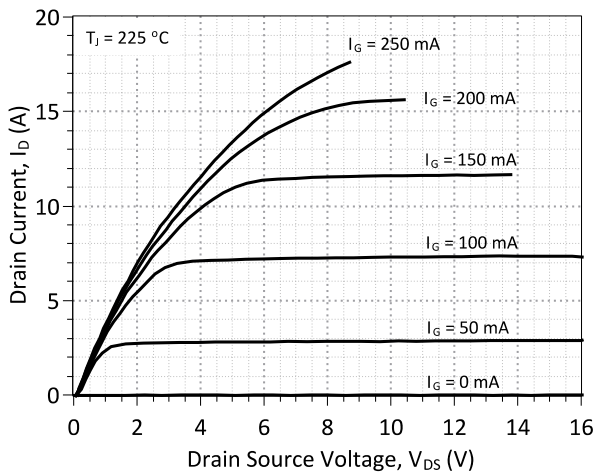


Figure 3: Typical Output Characteristics at 225 °C

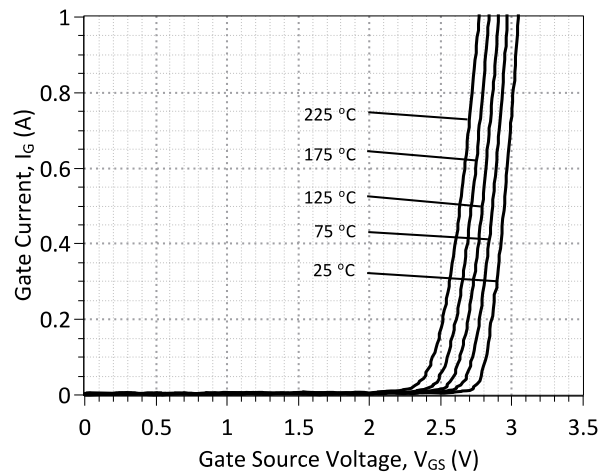


Figure 4: Typical Gate Source I-V Characteristics vs. Temperature

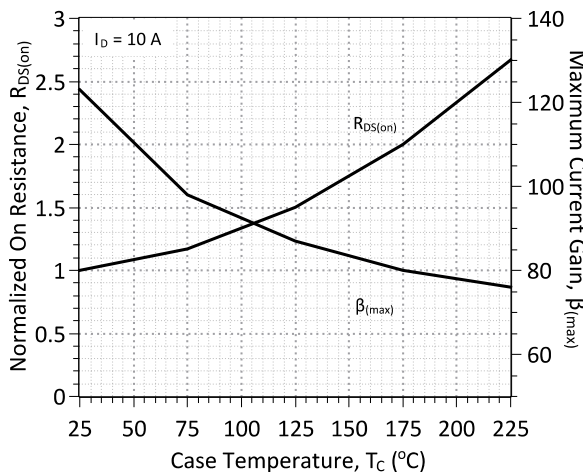


Figure 5: Normalized On-Resistance and Current Gain vs. Temperature

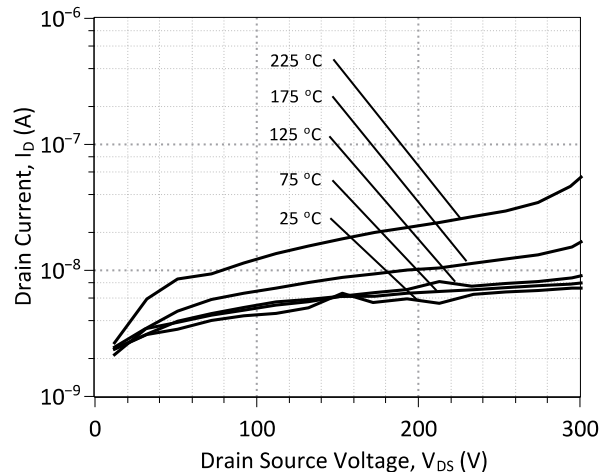


Figure 6: Typical Blocking Characteristics

Gate Drive Theory of Operation

The SJT transistor is a current controlled transistor which requires a positive gate current for turn-on as well as to remain in on-state. An ideal gate current waveform for ultra-fast switching of the SJT, while maintaining low gate drive losses, is shown in Figure 9.

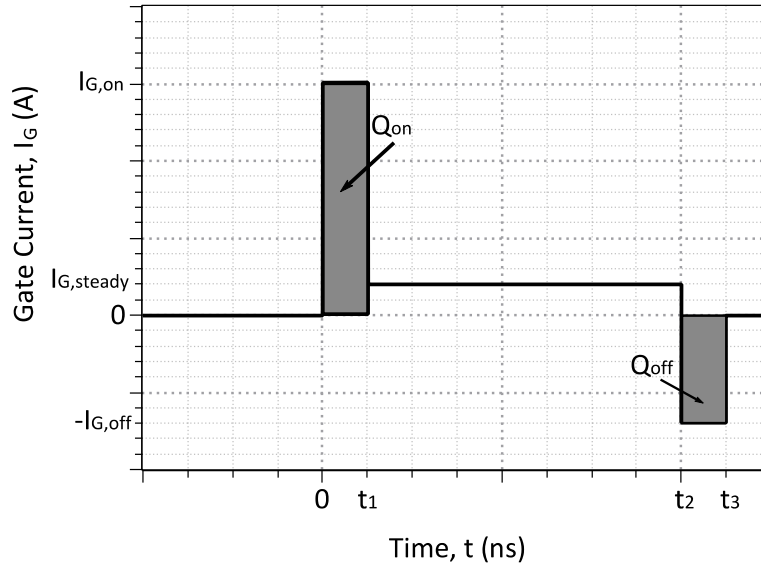


Figure 9: Idealized Gate Current Waveform

Gate Currents, $I_{G,pk}/-I_{G,pk}$ and Voltages during Turn-On and Turn-Off

An SJT is rapidly switched from its blocking state to on-state, when the necessary gate charge, Q_G , for turn-on is supplied by a burst of high gate current, $I_{G,on}$, until the gate-source capacitance, C_{GS} , and gate-drain capacitance, C_{GD} , are fully charged.

$$I_{G,on} * t_1 \geq Q_{gs} + Q_{gd}$$

The $I_{G,on}$ pulse should ideally terminate, when the drain voltage falls to its on-state value, in order to avoid unnecessary drive losses during the steady on-state. In practice, the rise time of the $I_{G,on}$ pulse is affected by the parasitic inductances, L_{par} in the package and drive circuit. A voltage developed across the parasitic inductance in the source path, L_s , can de-bias the gate-source junction, when high drain currents begin to flow through the device. The applied gate voltage should be maintained high enough, above the $V_{GS,ON}$ level to counter these effects.

A high negative peak current, $-I_{G,off}$ is recommended at the start of the turn-off transition, in order to rapidly sweep out the injected carriers from the gate, and achieve rapid turn-off. While satisfactory turn off can be achieved with $V_{GS} = 0$ V, a negative gate voltage V_{GS} may be used in order to speed up the turn-off transition.

Steady On-State

After the device is turned on, I_G may be advantageously lowered to $I_{G,steady}$ for reducing unnecessary gate drive losses. The $I_{G,steady}$ is determined by noting the DC current gain, h_{FE} , of the device

The desired $I_{G,steady}$ is determined by the peak device junction temperature T_J during operation, drain current I_D , DC current gain h_{FE} , and a 50 % safety margin to ensure operating the device in the saturation region with low on-state voltage drop by the equation:


$$I_{G,steady} \approx \frac{I_D}{h_{FE}(T, I_D)} * 1.5$$

Mechanical Specifications

Mechanical Parameters

Raster Size	2.10 x 2.10	mm ²	83 x 83	mil ²
Area total / active	4.41/3.31	mm ²	6836/5134	mil ²
Thickness	360	μm	14	mil
Wafer Size	100	mm	3937	mil
Flat Position	0	deg	0	deg
Passivation frontside	Polyimide			
Pad Metal (Anode)	4000 nm Al			
Backside Metal (Cathode)	400 nm Ni + 200 nm Au -system			
Die Bond	Electrically conductive glue or solder			
Wire Bond	Al ≤ 10 mil (Source) Al ≤ 3 mil (Gate)			
Reject ink dot size	Φ ≥ 0.3 mm			
Recommended storage environment	Store in original container, in dry nitrogen, < 6 months at an ambient temperature of 23 °C			

Chip Dimensions:

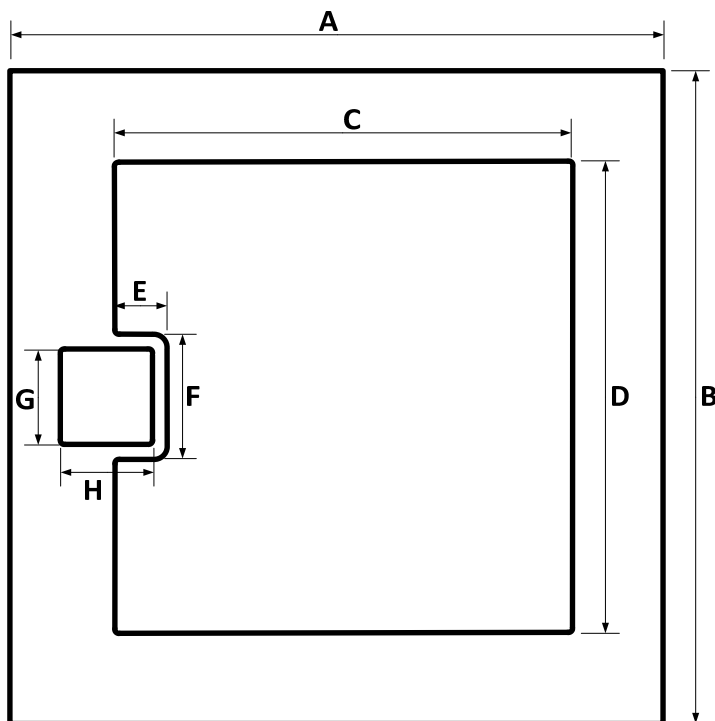

		mm	mil
DIE	A	2.10	83
	B	2.10	83
SOURCE WIREBONDABLE	C	1.47	58
	D	1.52	60
	E	0.17	7
	F	0.40	16
GATE WIREBONDABLE	G	0.30	12
	H	0.30	12

Revision History

Date	Revision	Comments	Supersedes
2014/08/26	1	Initial Release	

Published by

GeneSiC Semiconductor, Inc.
43670 Trade Center Place Suite 155
Dulles, VA 20166

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

SPICE Model Parameters

This is a secure document. Please copy this code from the SPICE model PDF file on our website (http://www.genesicsemi.com/images/hit_sic/baredie/sjt/GA10JT06-CAL_SPICE.pdf) into LTSPICE (version 4) software for simulation of the GA10JT06-CAL.

```
*      MODEL OF GeneSiC Semiconductor Inc.
*
*      $Revision:   2.0           $
*      $Date:      26-AUG-2014   $
*
*      GeneSiC Semiconductor Inc.
*      43670 Trade Center Place Ste. 155
*      Dulles, VA 20166
*
*      COPYRIGHT (C) 2014 GeneSiC Semiconductor Inc.
*      ALL RIGHTS RESERVED
*
* These models are provided "AS IS, WHERE IS, AND WITH NO WARRANTY
* OF ANY KIND EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED
* TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A
* PARTICULAR PURPOSE."
* Models accurate up to 2 times rated drain current.
*
.model GA10JT06 NPN
+ IS      4.4E-48
+ ISE     1.858E-28
+ EG      3.23
+ BF      125
+ BR      0.55
+ IKF     400
+ NF      1
+ NE      2
+ RB      7.0
+ RE      0.005
+ RC      0.105
+ CJC     3.96E-10
+ VJC     3.189
+ MJC     0.469
+ CJE     8.083E-10
+ VJE     3.1441
+ MJE     0.4308
+ XTI     3
+ XTB     -0.9
+ TRC1    1.0E-2
+ VCEO    600
+ ICRATING 10
+ MFG     GeneSiC_Semiconductor
*
* End of GA10JT06 SPICE Model
```