



H01N60S Series

N-Channel Power Field Effect Transistor

Description

This high voltage MOSFET uses an advanced termination scheme to provide enhanced voltage-blocking capability without degrading performance over time. In addition, this advanced MOSFET is designed to withstand high energy in avalanche and commutation modes. The new energy efficient design also offers a drain-to-source diode with a fast recovery time. Designed for high voltage, high speed switching applications in power supplies, converters and PWM motor controls, these devices are particularly well suited for bridge circuits where diode speed and commutating safe operating areas are critical and offer additional and safety margin against unexpected voltage transients.

Features

- 1A, 600V, $R_{DS(on)}=12\Omega@V_{GS}=10V$
- Low Gate Charge 15nC(Typ.)
- Low C_{iss} 4pF(Typ.)
- Fast Switching
- Improved d_v/d_t Capability


Absolute Maximum Ratings

Symbol	Parameter	H01N60SI / H01N60SJ	Units
V_{DSS}	Drain-Source Voltage	600	V
I_D	Drain Current (Continuous $T_C=25^\circ C$)	1	A
	Drain Current (Continuous $T_C=100^\circ C$)	0.6	A
I_{DM}	Drain Current (Pulsed) *1	4	A
V_{GS}	Gate-Source Voltage	± 30	V
E_{AS}	Single Pulse Avalanche Energy ($L=59mH, I_{AS}=1.1A, V_{DD}=50V, R_G=25\Omega, \text{Starting } T_J=25^\circ C$)	50	mJ
I_{AR}	Avalanche Current *1	1	A
E_{AR}	Repetitive Avalanche Energy	2.8	mJ
dv/dt	Peak Diode Recovery dv/dt *2	4.5	V/nS
V_{GS}	Gate-to-Source Voltage (Continue)	± 20	V
P_D	Total Power Dissipation ($T_A=25^\circ C$)	2.5	W
	Total Power Dissipation ($T_C=25^\circ C$)	28	W
	Derate above $25^\circ C$	0.22	W/ $^\circ C$
T_j, T_{stg}	Operating and Storage Temperature Range	-55 to +150	$^\circ C$
T_L	Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 5 seconds	300	$^\circ C$


*1: Repetitive Rating : Pulse width limited by maximum junction temperature

*2: $I_{SD} \leq 1.1A, di/dt \leq 200A/\mu s, V_{DD} \leq BV_{DSS}, \text{Starting } T_J=25^\circ C$

H01N60S Series Pin Assignment




3-Lead Plastic **TO-252**
Package Code: J
Pin 1: Gate
Pin 2 & Tab: Drain
Pin 3: Source



3-Lead Plastic **TO-251**
Package Code: I
Pin 1: Gate
Pin 2 & Tab: Drain
Pin 3: Source

H01N60S Series
Symbol:





Thermal Characteristics

Symbol	Parameter	Value	Units
$R_{\theta JC}$	Thermal Resistance Junction to Case Max.	4.5	°C/W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient Max.	110	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise specified)

Symbol	Characteristic	Min.	Typ.	Max.	Unit
--------	----------------	------	------	------	------

• Off Characteristics

V_{DSS}	Drain-Source Breakdown Voltage ($V_{GS}=0V, I_D=250\mu A$)	600	-	-	V
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temperature Coefficient ($I_D=250\mu A$, Referenced to 25°C)	-	0.6	-	V/°C
I_{DSS}	Zero Gate Voltage Drain Current ($V_{DS}=600V, V_{GS}=0V$)	-	-	1	μA
	Zero Gate Voltage Drain Current ($V_{DS}=480V, T_J=125^\circ\text{C}$)	-	-	50	μA
I_{GSSF}	Gate-Body Leakage Current-Forward ($V_{GS}=30V, V_{DS}=0V$)	-	-	100	nA
I_{GSSR}	Gate-Body Leakage Current-Reverse ($V_{GS}=-30V, V_{DS}=0V$)	-	-	-100	nA

• On Characteristics

$V_{GS(th)}$	Gate Threshold Voltage ($V_{DS}=V_{GS}, I_D=250\mu A$)	2	-	4	V
$R_{DS(on)}$	Static Drain-Source On-Resistance ($V_{GS}=10V, I_D=0.6A$) ^{*3}	-	-	12	Ω
g_{FS}	Forward Transconductance ($V_{DS}=40V, I_D=0.5A$) ^{*3}	-	0.75	-	S

• Dynamic Characteristics

C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=25V, f=1\text{MHz}$	-	210	250	pF
C_{oss}	Output Capacitance		-	19	25	
C_{riss}	Reverse Transfer Capacitance		-	4	8	

• Switching Characteristics

$t_{d(on)}$	Turn-on Delay Time	$V_{DD}=300V, I_D=1.1A$ $R_G=25\Omega$ ^{*3}	-	-	30	ns
t_r	Turn-on Rise Time		-	-	60	
$t_{d(off)}$	Turn-off Delay Time		-	-	45	
t_f	Turn-off Fall Time		-	-	75	
Q_g	Total Gate Charge	$V_{DS}=480V, I_D=1.1A$ $V_{GS}=10V$ ^{*3}	-	15	20	nC
Q_{gs}	Gate-Source Charge		-	4	-	
Q_{gd}	Gate-Drain Charge		-	3	-	

• Drain-Source Diode Characteristics and Maximum Ratings

I_S	Maximum Continuous Drain-Source Diode Forward Current	-	-	1	A
I_{SM}	Maximum Pulsed Drain-Source Diode Forward Current	-	-	4	A
V_{SD}	Drain-Source Diode Forward Voltage ($V_{GS}=0V, I_S=1A$)	-	-	1.4	V
t_{rr}	Reverse Recovery Time ($V_{GS}=0V, I_S=1.1A, di_F/dt=100A/\mu s$) ^{*3}	-	190	-	ns
Q_{rr}	Reverse Recovery Charge ($V_{GS}=0V, I_S=1.1A, di_F/dt=100A/\mu s$) ^{*3}	-	0.53	-	nC

*3: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$



TO-252 Dimension

3-Lead TO-252 Plastic
Surface Mount Package
HSMC Package Code: J

Marking:

Pb Free Mark
 Pb-Free: "●" (Note)
 Normal: None

Note: Green label is used for pb-free packing

Pin Style: 1.Gate 2.Drain 3.Source

Material:

- Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	6.35	6.80
C	4.80	5.50
F	1.30	1.70
G	5.40	6.25
H	2.20	3.00
L	0.40	0.90
M	2.20	2.40
N	0.90	1.50
a1	0.40	0.65
a2	-	*2.30
a5	0.65	1.05

*: Typical, Unit: mm

3-Lead TO-252 Plastic
Surface Mount Package
HSMC Package Code: J

Marking:

Pb Free Mark
 Pb-Free: "●" (Note)
 Normal: None

Note: Green label is used for pb-free packing

Pin Style: 1.Gate 2.Drain 3.Source

Material:

- Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	6.40	6.80
B	-	6.00
C	5.04	5.64
D	-	*4.34
E	0.40	0.80
F	0.50	0.90
G	5.90	6.30
H	2.50	2.90
I	9.20	9.80
J	0.60	1.00
K	-	0.96
L	0.66	0.86
M	2.20	2.40
N	0.70	1.10
O	0.82	1.22
a1	0.40	0.60
a2	2.10	2.50
y1	-	5°
y2	-	3°

*: Typical, Unit: mm



TO-251 Dimension

Marking:

Pb Free Mark
 Pb-Free: "●" (Note)
 Normal: None

Date Code Control Code

Note: Green label is used for pb-free packing

Pin Style: 1.Gate 2.Drain 3.Source

Material:

- Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	6.35	6.80
C	4.80	5.50
F	1.30	1.70
G	5.40	6.25
H1	6.75	8.00
K	0.50	0.90
K1	0.40	0.90
L	0.90	1.50
M	2.20	2.40
a1	0.40	0.65
a2	-	*2.30

*: Typical, Unit: mm

**3-Lead TO-251
Plastic Package
HSMC Package Code: I**

Marking:

Pb Free Mark
 Pb-Free: "●" (Note)
 Normal: None

Date Code Control Code

Note: Green label is used for pb-free packing

Pin Style: 1.Gate 2.Drain 3.Source

Material:

- Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	6.40	6.80
B	-	6.00
C	5.04	5.64
D	-	*4.34
E	0.40	0.80
F	0.50	0.90
G	5.90	6.30
H	-	*1.80
H1	-	*9.30
I	-	*16.10
J	-	*0.80
K	-	0.96
K1	-	*0.76
M	2.20	2.40
a1	0.40	0.60
a2	2.10	2.50
y1	-	5°
y2	-	3°

*: Typical, Unit: mm

**3-Lead TO-251
Plastic Package
HSMC Package Code: I**

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:


- **Head Office** (Hi-Sincerity Microelectronics Corp.): 10F., No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.
 Tel: 886-2-25212056 Fax: 886-2-25632712, 25368454
- **Factory 1:** No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
 Tel: 886-3-5983621~5 Fax: 886-3-5982931



Soldering Methods for HSMC's Products

1. Storage environment: Temperature=10°C~35°C Humidity=65%±15%
2. Reflow soldering of surface-mount devices

Figure 1: Temperature profile

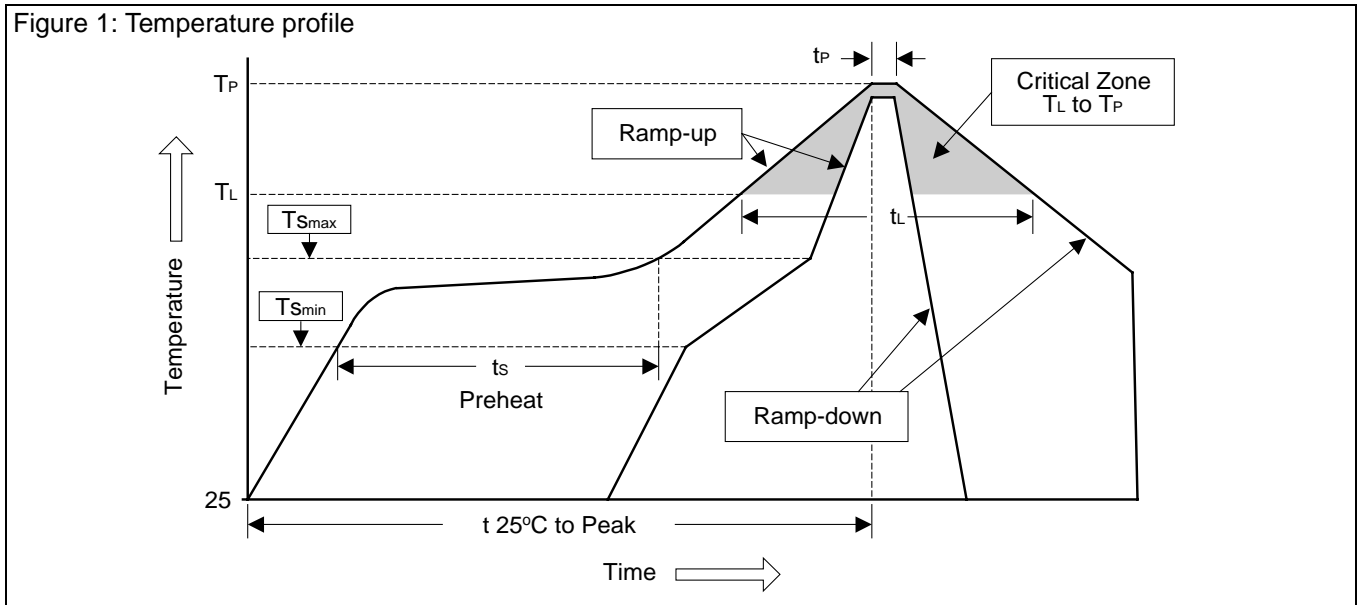

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	<3°C/sec	<3°C/sec
Preheat		
- Temperature Min (T_{smin})	100°C	150°C
- Temperature Max (T_{smax})	150°C	200°C
- Time (min to max) (t_s)	60~120 sec	60~180 sec
T_{smax} to T_L		
- Ramp-up Rate	<3°C/sec	<3°C/sec
Time maintained above:		
- Temperature (T_L)	183°C	217°C
- Time (t_L)	60~150 sec	60~150 sec
Peak Temperature (T_P)	240°C +0/-5°C	260°C +0/-5°C
Time within 5°C of actual Peak Temperature (t_P)	10~30 sec	20~40 sec
Ramp-down Rate	<6°C/sec	<6°C/sec
Time 25°C to Peak Temperature	<6 minutes	<8 minutes

3. Flow (wave) soldering (solder dipping)

Products	Peak temperature	Dipping time
Pb devices.	245°C ±5°C	5sec ±1sec
Pb-Free devices.	260°C +0/-5°C	5sec ±1sec