




# CONNOR-WINFIELD CORPORATION

AURORA, IL. 60505  
 PHONE (630) 851-4722  
 FAX (630) 851-5040

## TIGHT TOLERANCE 14 PIN DIP HCMOS

SPECIFICATIONS	HC145		
Frequency Range	4MHz to 50MHz		
Frequency Stability	±10ppm		
	(Inclusive of calibration tolerance at 25°C, operating temperature range, input voltage change, load change, shock and vibration)		
Temperature Range	-10°C to +60°C		
Output	Waveform	HCMOS Squarewave	
	Load	15pF	
	Voltage	Voh	4.5V Minimum
		Vol	0.5V Maximum
	Current	Ioh	-4.0mA
		Iol	4.0mA
	Duty Cycle	45/55 Maximum measured at 50% level	
Rise/Fall Time	6nS Maximum		
Start Up Time	10mS Maximum		
Aging	±10ppm Typical		
Supply Voltage	+5Vdc ±10%		
Supply Current	25mA Maximum		
Package	All metal, hermetically sealed, welded package		

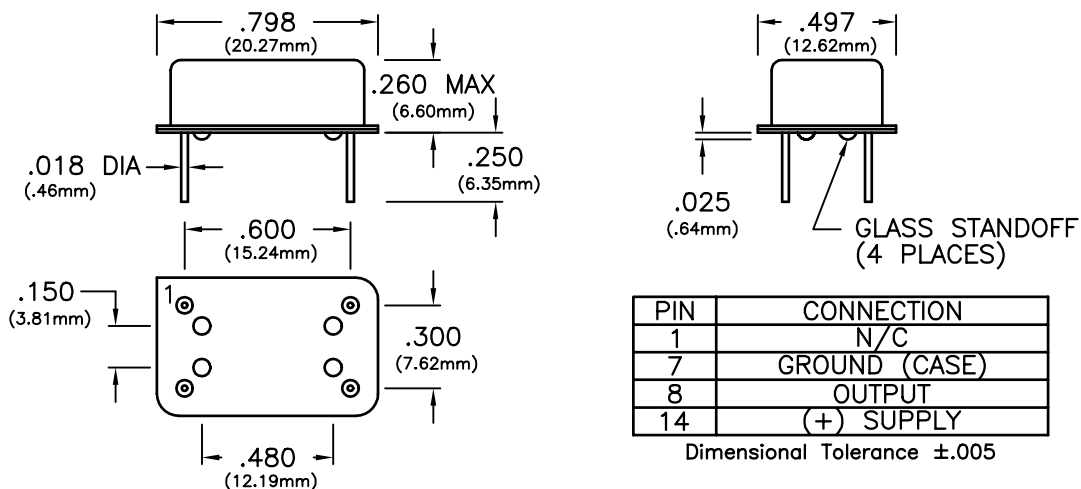

Specifications subject to change without notice

BULLETIN #: HC016  
 PAGE 1 OF 1

REV: 02  
 DATE: 5/17/95

ISSUED BY: \_\_\_\_\_