

GLASS PASSIVATED RECTIFIER

VOLTAGE RANGE: 50 — 1000 V
CURRENT: 3.0 A


FEATURES

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-27, molded plastic
- ◇ Terminals: Axial lead, solderable per ML-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any

DO - 27

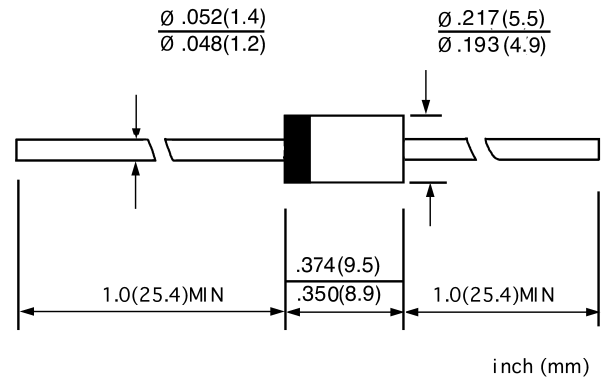

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		HER 301G	HER 302G	HER 303G	HER 304G	HER 305G	HER 306G	HER 307G	HER 308G	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	3.0								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	I_{FSM}	200.0					150.0			A
Maximum instantaneous forward voltage @3.0 A	V_F	1.0		1.3		1.7			V	
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	10.0					150.0			μA
Maximum reverse capacitance (Note1)	t_{rr}	50					75			ns
Typical junction capacitance (Note2)	C_J	70					50			pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	30.0								$^\circ C/W$
Operating junction temperature range	T_J	- 55 — + 175								$^\circ C$
Storage temperature range	T_{STG}	- 55 — + 175								$^\circ C$

NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 –FORWARD DERATING CURVE

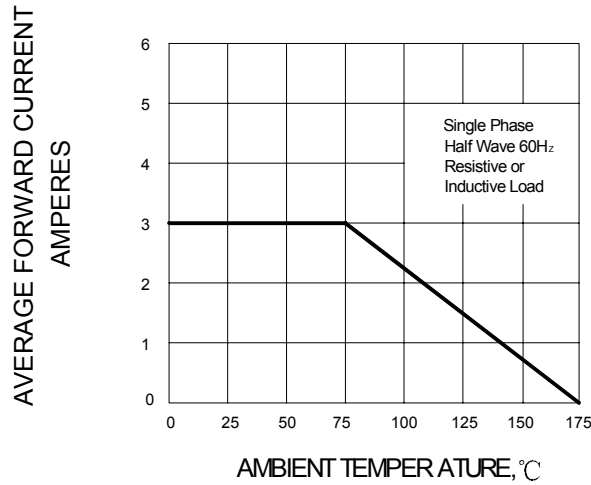


FIG.2 –TYPICAL REVERSE CHARACTERISTICS

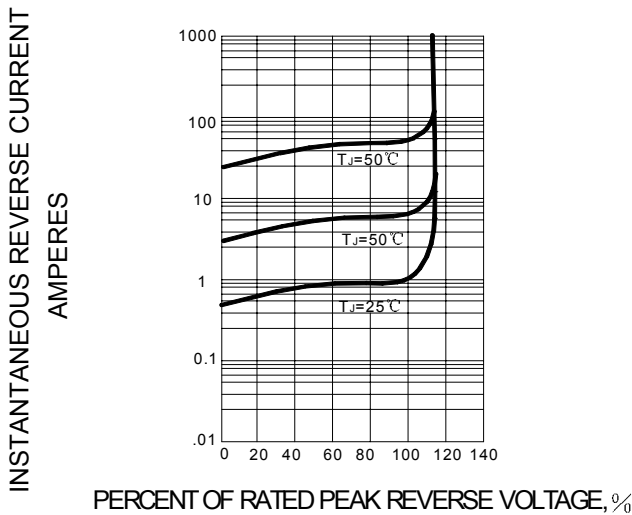


FIG.3–TYPICAL FORWARD CHARACTERISTICS

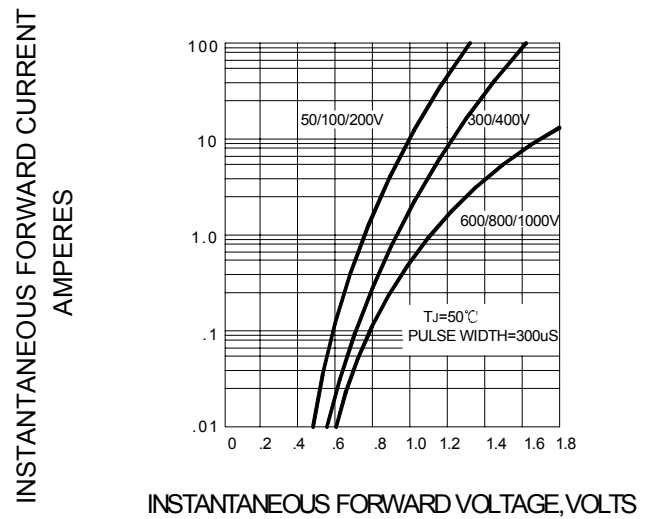


FIG.4–PEAK FORWARD SURGE CURRENT

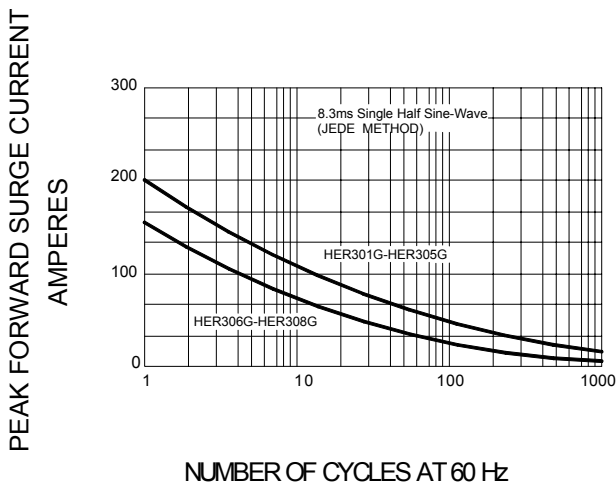


FIG.5–TYPICAL JUNCTION CAPACITANCE

