

## HER501 THRU HER508


CURRENT 5.0 Amperes  
VOLTAGE 50 to 1000 Volts

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low forward voltage drop
- High current capability
- High reliability
- Low power loss, high efficiency
- High surge current capability
- High speed switching
- Low leakage

### Mechanical Data

- Case : JEDEC DO-201AD molded plastic body
- Epoxy : UL94V-0 rate flame retardant
- Lead : Plated axial lead solderable per MIL-STD-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.074 ounce, 2.1 gram

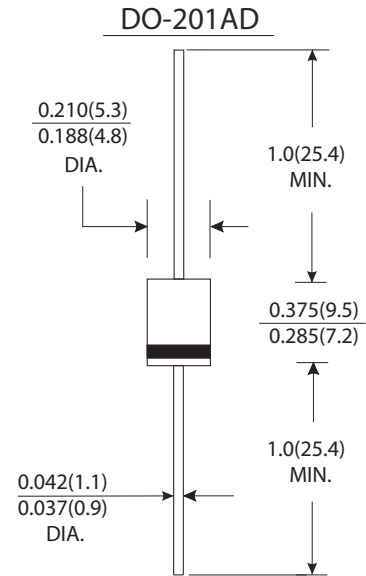

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	HER 501	HER 502	HER 503	HER 504	HER 505	HER 506	HER 507	HER 508	Units
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length @ at T <sub>A</sub> =50 °C	I <sub>(AV)</sub>	5.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	200.0					150.0			Amps
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>	1.0		1.3		1.7			Volts	
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>	10.0								μ A
Maximum full load reverse current full cycle average. 0.375"(9.5mm) lead length at T <sub>L</sub> =55 °C		150								
Maximum reverse recovery time (Note 1)	T <sub>rr</sub>	50					75			ns
Typical junction capacitance (Note 2)	C <sub>J</sub>	70					50			pF
Operating junction and storage temperature range	T <sub>J</sub> T <sub>STG</sub>	-65 to +150								°C

#### Notes:

- (1) Test conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A.
- (2) Measured at 1MHz and applied reverse voltage of 4.0 Volts.



## RATINGS AND CHARACTERISTIC CURVES HER501 THRU HER508

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

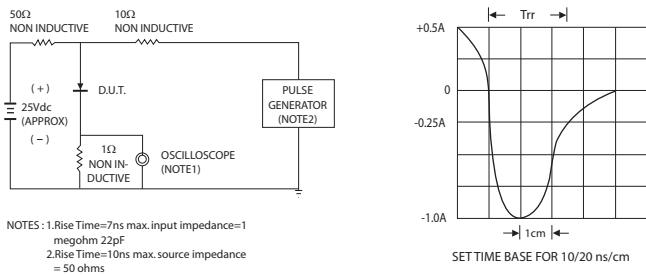


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

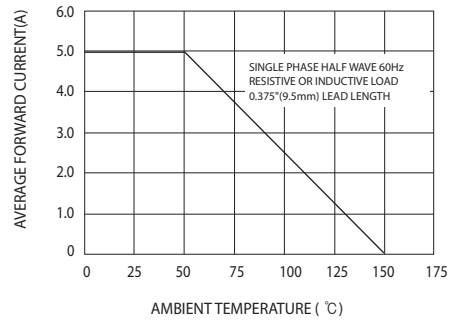


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

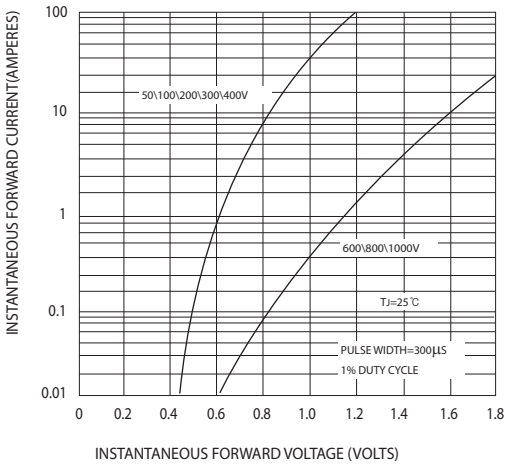


FIG.4-TYPICAL REVERSE CHARACTERISTICS

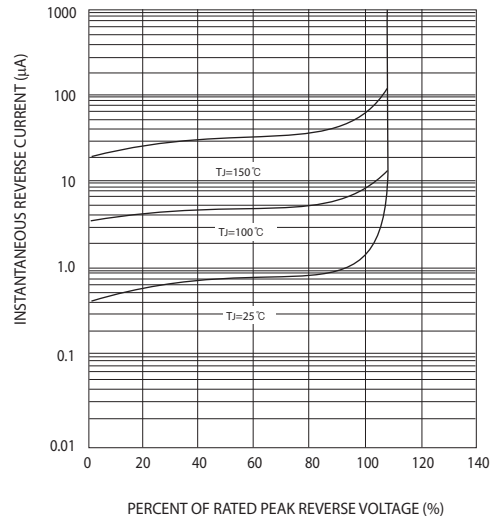


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

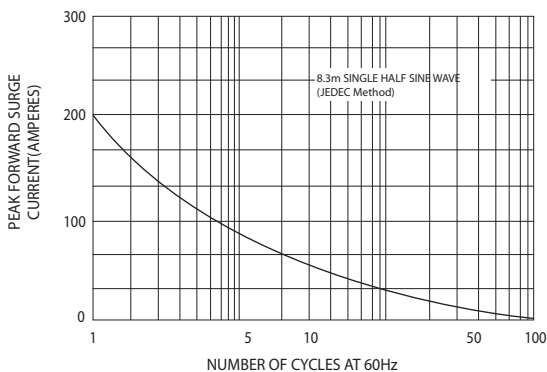


FIG.6-TYPICAL JUNCTION CAPACITANCE

