

DEC

HER801 THRU HER806


CURRENT 8.0 Amperes
VOLTAGE 50 to 600 Volts

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low forward voltage drop
- High current capability
- High reliability
- Low power loss, high efficiency
- High surge current capability
- High speed switching
- Low leakage

Mechanical Data

- Case : JEDEC TO-220A molded plastic body
- Terminals : Lead solderable per MIL-STD-750, method 2026
- Polarity : As marked
- Mounting Position : Any
- Weight : 0.08 ounce, 2.24 gram

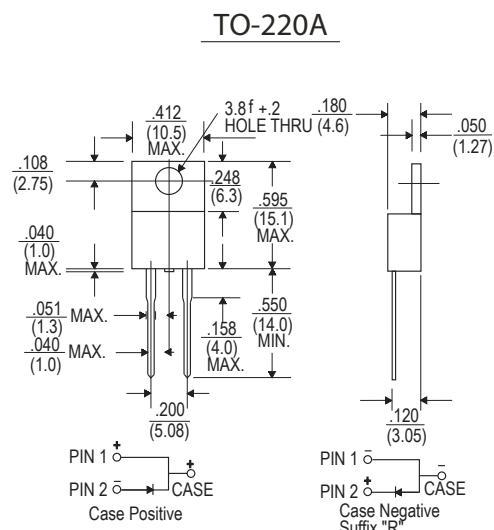

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	HER 801	HER 802	HER 803	HER 804	HER 805	HER 806	Units	
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	300	400	600	Volts	
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	Volts	
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	Volts	
Maximum average forward rectified current 0.375" (9.5mm) lead length @ at T _A =100 °C	I _(AV)	8.0						Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	125						Amps	
Maximum instantaneous forward voltage at 8.0A	V _F	1.0			1.3	1.7	Volts		
Maximum DC reverse current at rated DC blocking voltage T _A =25 °C	I _R	10.0						μ A	
Maximum DC reverse current at rated DC blocking voltage T _A =125 °C		100							
Maximum reverse recovery time (Note 1)	T _{rr}	50			80	ns			
Typical junction capacitance (Note 2)	C _J	80			50	pF			
Typical thermal resistance (Note 3)	R _{θJC}	2.2						°C/W	
Operating junction and storage temperature range	T _J T _{STG}	-55 to +150						°C	

Notes:

- Test conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A.
- Measured at 1MHz and applied reverse voltage of 4.0 Volts.
- Thermal resistance from junction to case mounting on heatsink.

DEC

RATINGS AND CHARACTERISTIC CURVES HER801 THRU HER806

FIG . 1 -REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

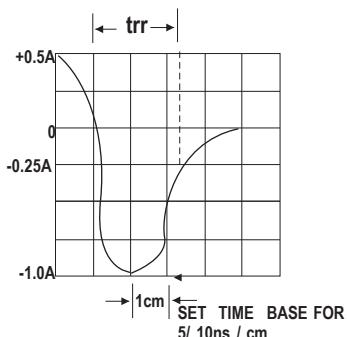
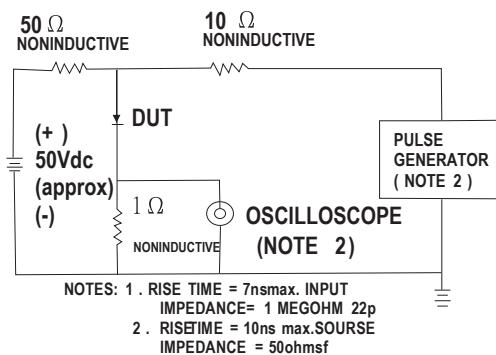


FIG . 2 - MAXIMUM AVERAGE FORWARD CURRENT DERATING

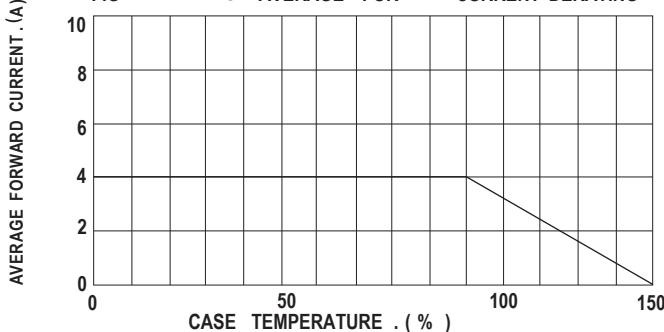


FIG . 4 -MAXIMUM NON - REPETITIVE FORWARD SURGE CURRENT

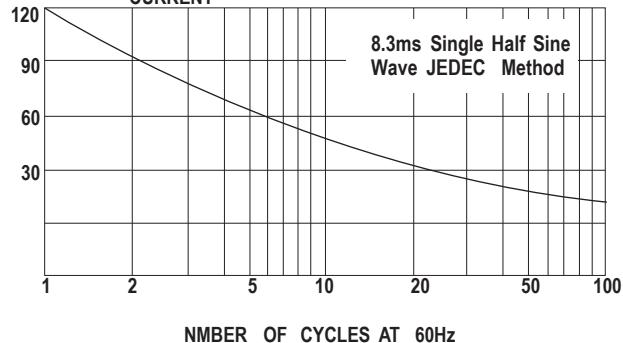


FIG . 5 -TYPICAL JUNCTION CAPACITANCE

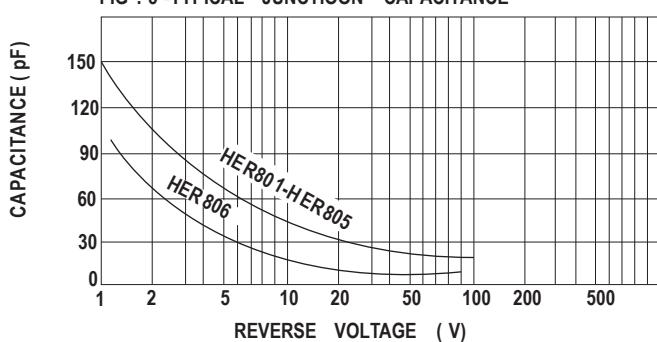


FIG . 3 -TYPICAL REVERSE CHARACTERISTICS

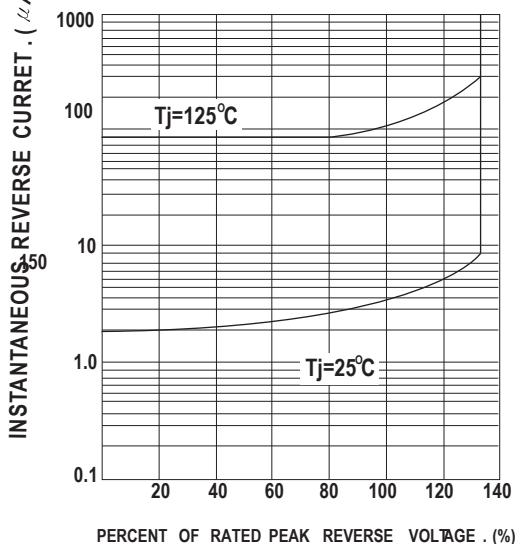


FIG . 6 -TYPICAL FWARD CHARACTERISTICS

