

Mercury Short Arc Lamps

HSH1003GILO and HSH1003GILOS

Lamps for Photolithography



Description


PerkinElmer Optoelectronics is a leading manufacturer of mercury short arc lamps ranging in output power from 1000 to 8000 watts. These lamps are used in the production of printed circuit boards, liquid crystal displays and semiconductors. The HSH Series lamps are used worldwide in microlithography systems manufactured by ASML, Canon, GCA, Nikon, Karl Suss, Ultratech Stepper, and SVG. With extremely high stability, uniform output distribution and extended lamp lifetimes, the HSH Series has become the lamp choice of many of the world's leading semiconductor manufacturers.

PerkinElmer has been a leading manufacturer of high intensity arc lamps for more than 30 years and is a premier lamp supplier for solid state lasers, medical equipment, NASA space systems and microlithography. PerkinElmer has steadily advanced lamp performance from 1000 watts to 8000 watts. With the introduction of new materials and proprietary manufacturing processes, we have extended lamp lifetimes from several hundred

hours to more than two thousand hours. The HSH Series provides longer lifetimes, outstanding uniformity, and excellent spectral quality which results in increased throughput, reduced downtime and an overall reduction in the cost of ownership.

Applications

- Microlithography

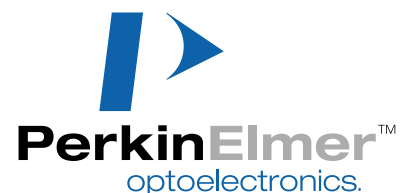


HSH1003GILO and HSH1003GILOS

Operational Specifications

Description	Nominal	Range
Power (idling mode)	700 watts	650-750 watts
Power (flash mode)	1000 watts	1050 watts (max)
Current (idling mode)	27 amps (DC)	24-30 amps (DC)
Current (flash mode)	36 amps (DC)	32-40 amps (DC)
Voltage (idling mode)	26 volts (DC)	23-29 volts (DC)
Voltage (flash mode)	28 volts (DC)	25-31 volts (DC)
Current Ripple	3%	
Temperature (at base)	220°C (max)	
Lifetime	1500 hours	

Dimensions

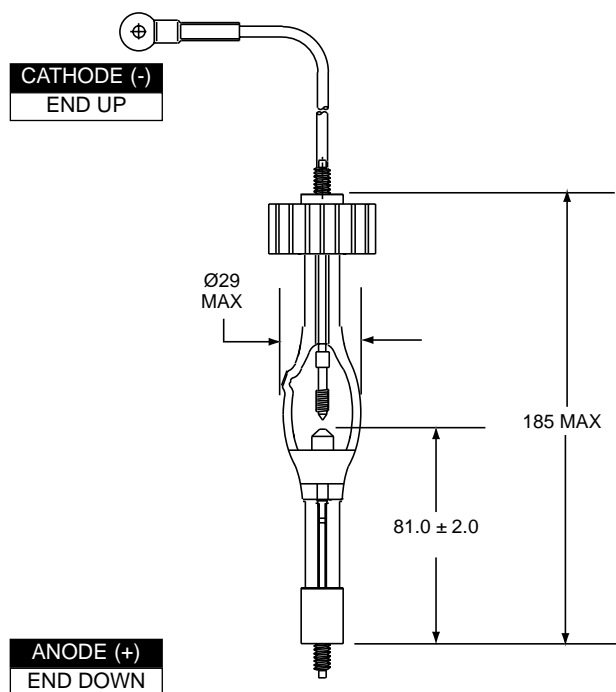

All dimensions are in millimeters.


Notes

- Lamp must be operated with cathode end up and anode end down. Inclination of lamp axis to vertical must not exceed 10°.


Physical Specifications

Description	Specification
Arc Gap	3.0 mm (max)
Anode Base	15mm Dia (M6-P1.0)
Cathode Base	Cooling Fin

Spectral Output

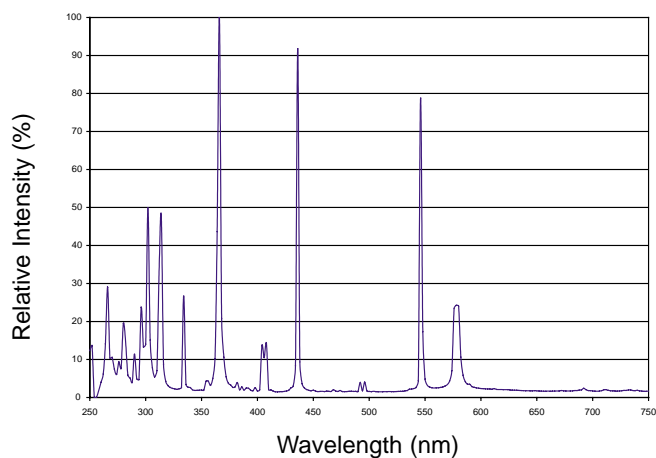

Typical Performance Graph

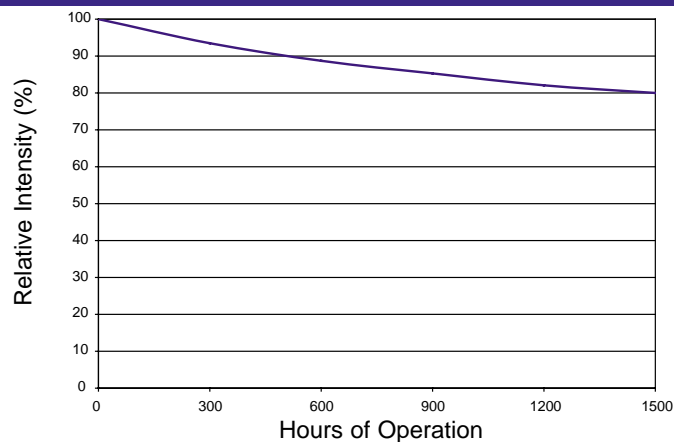

Part Number References

Used In	GCA XLS
Replaces	USH 1003FGIL2

PerkinElmer welcomes inquiries about special lamps. We would be pleased to discuss the requirements of your application and the feasibility of designing a lamp specifically suited to your needs.

For more information e-mail us at opto@perkinelmer.com or visit our web site at www.perkinelmer.com/opto.

All values are nominal; specifications subject to change without notice.

USA:
 PerkinElmer Optoelectronics
 44370 Christy St.
 Fremont, CA 94538
 Phone: (510) 979-6500
 Fax: (510) 687-1140

Europe:
 PerkinElmer Optoelectronics GmbH
 Wenzel-Jaksch-Str. 31
 65199 Wiesbaden
 Germany
 Phone: +49 611 492 0
 Fax: +49 611 492 177

Asia:
 PerkinElmer Optoelectronics
 47 Ayer Rajah Crescent #06-12
 Singapore 139947
 Phone: +65 775 2022
 Fax: +65 775 1008

