





RC-Drive and RC-Drive Fast

Cost-Optimized IGBT for Consumer Drive Applications

The RC-Drives IGBT technology is a cost optimized solution for the price-sensitive consumer drivers market that provides outstanding performance for permanent magnet synchronous and brushless DC motor drives.

The new family of reverse conduct RC-Drives Fast were developed to meet rising demand for the low power motor drivers on consumer market. IGBT and diode losses are optimized to reduce losses at frequencies of 4 ~ 30kHz. RC-Drives Fast enables high efficiency designs for inverters above 16kHz to reduce the audible noise to absolutely silent level. Furthermore highly precise vector control techniques can be used to provide more torque in operation at low speed and high performance dynamics in the control at high speed. The small size of the components allows high power density designs with less system costs.

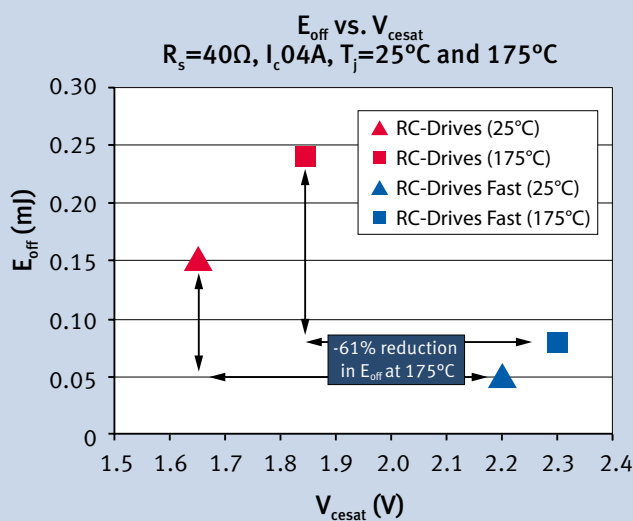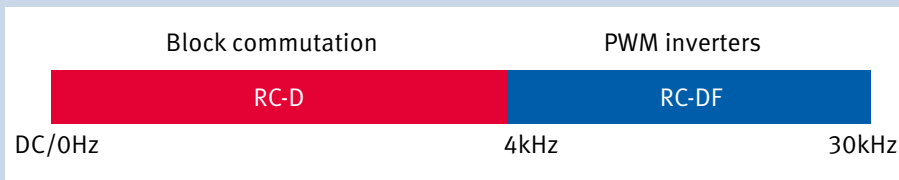

Due to different trade-off between conduction and switching losses, either RC-Drives or RC-Drives Fast can be offered depending on switching frequency.

Features

- Optimized E_{on} , E_{off} and Q_{rr} for up to 20% lower switching losses
- Operating range of DC to 30kHz
- Max junction temperature 175°C
- Short circuit capability of 5 μ s
- Very tight parameter distribution
- Best in class current versus package size performance
- Smooth switching performance leading to low EMI levels
- Complete product portfolio and PSpice Models on the internet

Benefits

- Excellent cost/performance for hard switching applications
- Outstanding temperature stability
- Very good EMI behavior
- Up to 60% space saving on the PCB
- Higher reliability due to monolithically integrated IGBT & diode due to less thermal cycling during switching

Applications

- Compressors
- Pumps
- Fans
- Hard switching topologies up to 1.0kW



RC-Drive and RC-Drive Fast

Cost-Optimized IGBT for Consumer Drive Applications

Product Specifications for RC-Drives and RC-Drives Fast

Partnumber	Package Type	Power [W]	Recomm. Switching Freq.	V _{CE} [V]	I _C [A]		V _{CESAT} [V]		E _{ts} [mJ]		t _{SC} [μs]	V _F [V]		Q _{rr} [μC]	
					25°	100°C	25°C	175°C	25°C	175°C		25°C	175°C	25°C	175°C
IKD03N60RF <small>new!</small>	D-PAK	40..80	4..30 kHz	600	5	2,5	2,2	2,3	0,09*	0,14*	5	2,1	2	0,06*	0,19*
IKD04N60RF <small>new!</small>	D-PAK	80..150	4..30 kHz	600	8	4	2,2	2,3	0,11*	0,19*	5	2,1	2	0,09*	0,26*
IKD06N60RF <small>new!</small>	D-PAK	150..250	4..30 kHz	600	12	6	2,2	2,3	0,18*	0,28*	5	2,1	2	0,16*	0,34*
IKD10N60RF <small>new!</small>	D-PAK	250-600	4..30 kHz	600	20	10	2.2.	2,3	0,35*	0,52*	5	2,1	2	0,27*	0,62*
IKD15N60RF <small>new!</small>	D-PAK	600..1kW	4..30 kHz	600	30	15	2.2.	2,3	0,52*	0,78*	5	2,1	2	0,42*	1*
IKU04N60R	I-PAK	80..150	DC..5 kHz	600	8	4	1,65**	1,85**	0,24	0,4	5	1,7**	1,7**	0,22	0,52
IKD04N60R	D-PAK														
IKU06N60R	I-PAK	150-250	DC..5 kHz	600	12	6	1,65**	1,85**	0,33	0,56	5	1,7**	1,7**	0,37	0,8
IKD06N60R	D-PAK														
IKU10N60R	I-PAK	250-600	DC..8kHz	600	20	10	1,65**	1,85**	0,59	0,93	5	1,7**	1,7**	0,56	1,22
IKD10N60R	D-PAK														
IKU15N60R	I-PAK	600..1kW	DC..8kHz	600	30	15	1,65**	1,85**	0,9	1,25	5	1,7**	1,7**	0,76	1,7
IKD15N60R	D-PAK														

* Speed Optimization

**Conduction Optimization

For more information visit RC-Drives promo page on www.infineon.com/rcdf



Published by
Infineon Technologies Austria AG
9500 Villach, Austria

© 2012 Infineon Technologies AG.
All Rights Reserved.

Visit us:
www.infineon.com

Order Number: B152-H9416-G2-X-7600-DB2012-0011
Date: 09 / 2012

ATTENTION PLEASE!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

INFORMATION

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office. Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.